

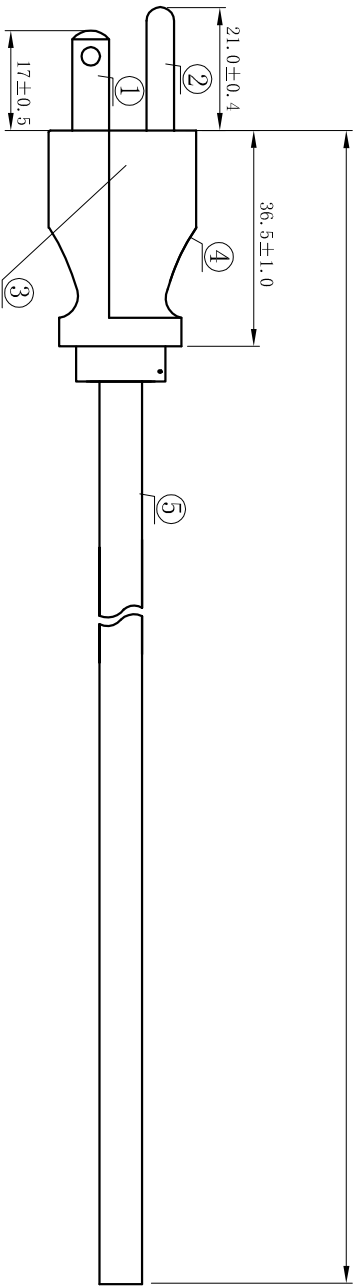
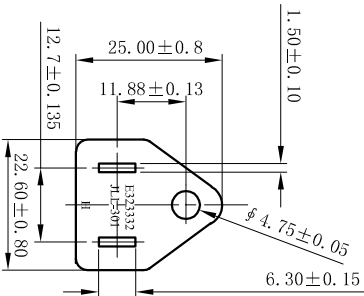


PART NO.	JLL-301	WIRE	SCALE	1 : 1
DESCRIPTION	SJT#16*3C 105C SHIELDED			UNIT :
DWG No.	800-1601-2-SJT0-BL-00200			mm

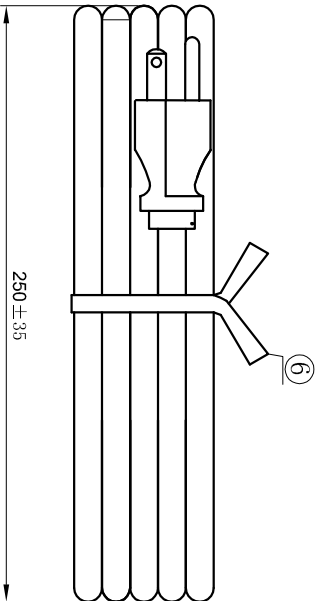

2000±50

CONDUCTOR CONSTRUCTION (N/mm):
26/0.254AS

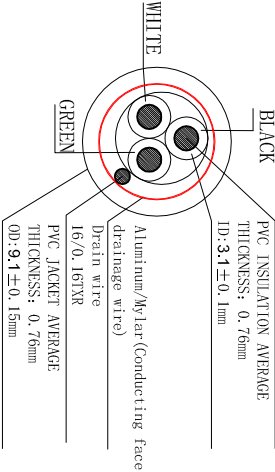

NOTES:

- 1) JACKET COLOR: BLACK
- 2). E-GREEN; L-BLACK ; N-WHITE

TESTING:

- 1) 100% OPEN & SHORT TESTING
- 2) INSULATION RESISTANCE:100M ohm (min)
- 3) VOLTAGE:DC500V/1min
- 4) ROHS COMPLIANT

Printing the contents of wire The use of printing ink replenish wire

E243929 (UL) SJT 3X16AWG(1.31mm²) VW-1 SHIELDED 105°C 300V CSA 228191 S
J1 3X16AWG(1.31mm²) FT2 SHIELDED 105°C 300V -UL-

NO.	SPECIFICATION	COLOUR	MATERIAL	AMOUNT
①	Load terminals 98661	Silver	Cu	2P
②	Grounding terminal 97475	Silver	Cu	1P
③	Model aircraft 8661AW-3P	WHITE	PBT	1PCS
④	Plug JLL-301	BLACK	PVC Cu	1PCS
⑤	Wire SJT 16AWG/3C 105°	BLACK	PVC Cu	1PCS
⑥	Ties	BLACK		1PCS