

MICRO SWITCHFREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929**ASSEMBLY -
PUSHBUTTON SWITCH**CATALOG LISTING
82PB19-H58
FAA-PMACATALOG LISTING
82PB19-H58

PAGE 1 OF 1

ISSUE
M
7

REPLACES

PR-8957

CHECK

J A F

29 OCT 98

J A F

29 OCT 98

J A F

15 APR 99

J A F

9 JUNE 80

C E B

7 JUNE 80

C E B

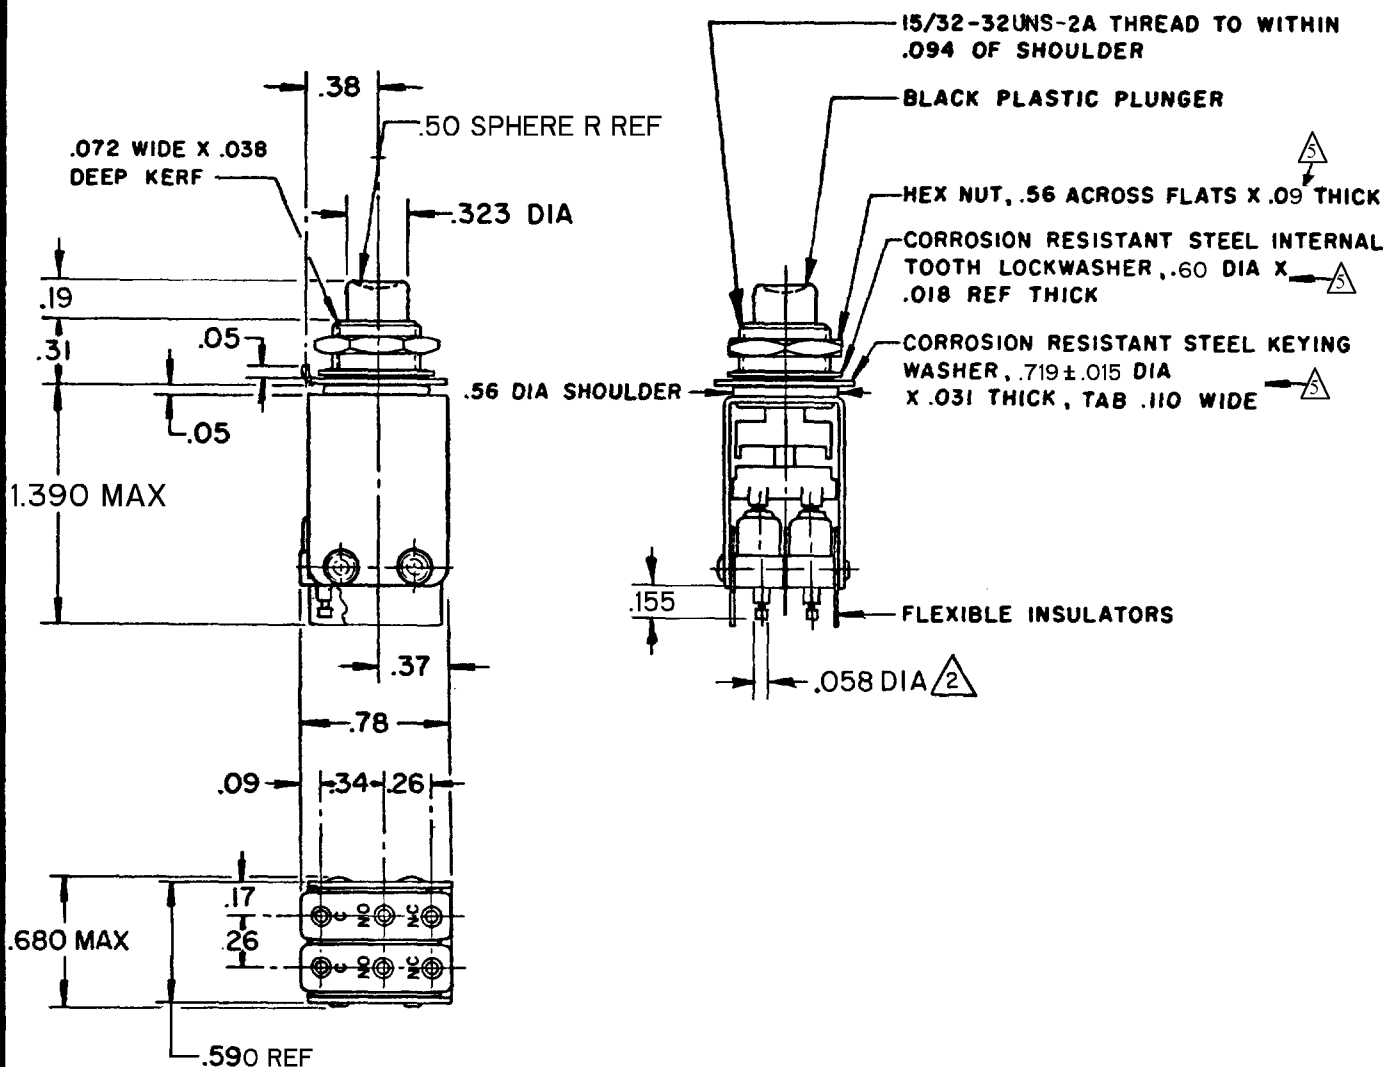
7 JUNE 80

C E B

7 JUNE 80

C E B


7 JUNE 80

**NOTES**

- 1-UNIT INCLUDES CAT. LIST. 31ISM-TYPE BASIC SWITCH (2)
- 2 PLATED TERMINALS WILL ACCEPT "AMP", .058 DIA PIN RECEPTACLES
- 3-SWITCHES DO NOT NECESSARILY OPERATE SIMULTANEOUSLY
- 4-ALTERNATE ACTION MECHANISM (PUSH-ON, PUSH-OFF ACTUATION)
- 5- MOUNTING HARDWARE FURNISHED UNASSEMBLED

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

**CHARACTERISTICS**

OPERATING FORCE -- 35 OZ APPROX

ELECTRICAL DATACONTACT ARRANGEMENT
S P D T (2)

250 VAC ----- 5 AMP
30 VOLTS DC RATING

INDUCTIVE -----	SEA LEVEL -----	3 AMP
	50,000 FT. -----	2.5 AMP
RESISTIVE -----	SEA LEVEL -----	5 AMP
	50,000 FT. -----	5 AMP
MAXIMUM INRUSH -----		24 AMP

SCALE FULL**DO NOT SCALE PRINT**TOLERANCES
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR
REFERENCE. UNLESS NOTED, TOLERANCES ARE ±

DIM.	TOL.	DIM.	TOL.
in	mm/in	in	mm/in
NO PLACES	X	1/.04	
ONE PLACE	X, X	0.4/.016	X, X
TWO PLACES	X, XX	0.15/.008	X, XX
THREE PLACES	X, XXX		X, XXX

DESIGN UNITS ☐ SI METRIC ☐ US CUSTOMARY

WEIGHT

FORMTEK

DRAWN