


MATERIAL NO.	ENGINEERING NO.	DIM "A" INCH	DIM "A" (mm)
834219207	83421-9207	18.00 +.50 / -0.0	457.2 +12.7 / -0.0
834219208	83421-9208	36.00 +.50 / -0.0	914.4 +12.7 / -0.0
834219209	83421-9209	72.00 +.50 / -0.0	1828.8 +12.7 / -0.0



SALES DRAWING

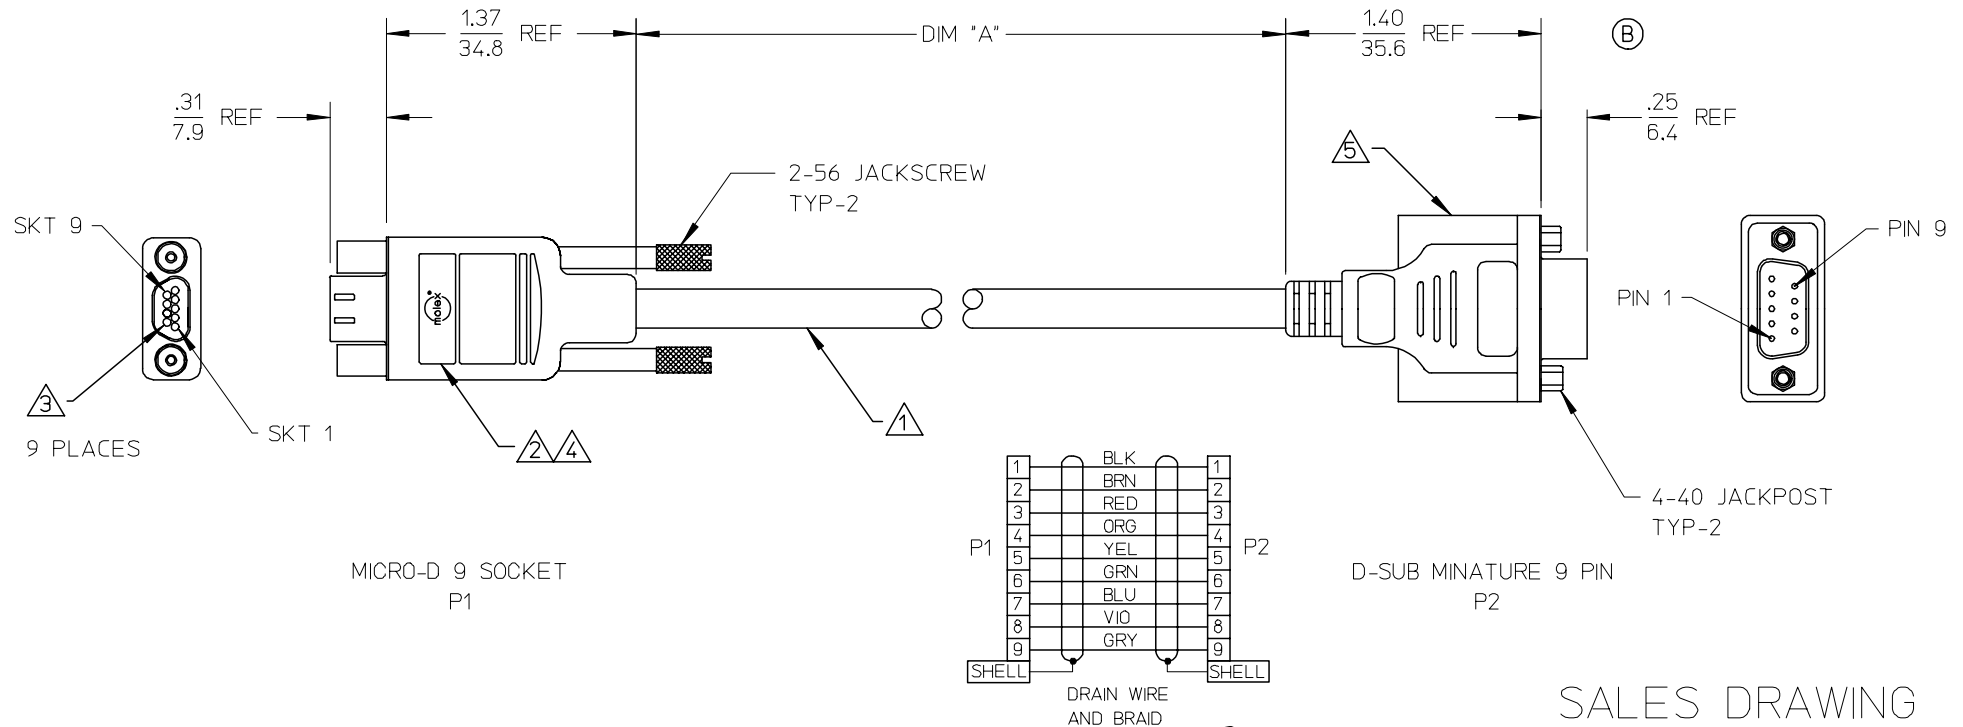

NOTES: UNLESS OTHERWISE SPECIFIED

- CABLE: UL 2464 28 AWG, 9 CONDUCTOR, TINNED COPPER, 7 STRAND.
WIRE INSULATION: PVC SHIELD: AL-FOIL / MYLAR. INCLUDING DRAIN
WIRE & BRAID. OUTER CABLE JACKET: BLACK PVC.
- MOLEX COMMERCIAL MICRO-D # 83421-9014.
- MOLEX TERMINAL SOCKET # 83000-9503, (2,500 PC REEL). TYP-16 PLACES.
- REFER TO PS-83421-9000 FOR PRODUCT SPEC.
REFER TO DWG. E-83421-001 FOR ASS'Y INSTRUCTIONS.
- D-SUB, 9 PIN MALE CONNECTOR (SOLDER TYPE) WITH OVERMOLDED INSULATOR.
- ALL COMPONENTS ARE RoHS COMPLIANT. (B)

REDRAWN EC NO: ETC2007-0118 DRWN: BONANNO 2006/09/29 CHKD: J. MACNEIL 2006/10/13 APPR: J. MACNEIL 2006/10/13	DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE ---	DESIGN UNITS INCH	THIRD ANGLE PROJECTION 		
			mm	INCH	DRAWN BY TODD B	DATE 9-12-06	TITLE 9 SKT COMM MICRO-D TO 9 PIN D-SUB W/JACKPOST CABLE ASSEMBLY				
			4 PLACES	± --- ± ---	CHECKED BY J. MACNEIL	DATE 9-12-06					
			3 PLACES	± --- ± ---	APPROVED BY J. MACNEIL	DATE 9-12-06					
			2 PLACES	± --- ± ---	MOLEX INCORPORATED						
			1 PLACE	± --- ± ---	MATERIAL NO.		DOCUMENT NO.		SHEET NO.		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		SD-83421-015		1 OF 1					
B		B		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							