
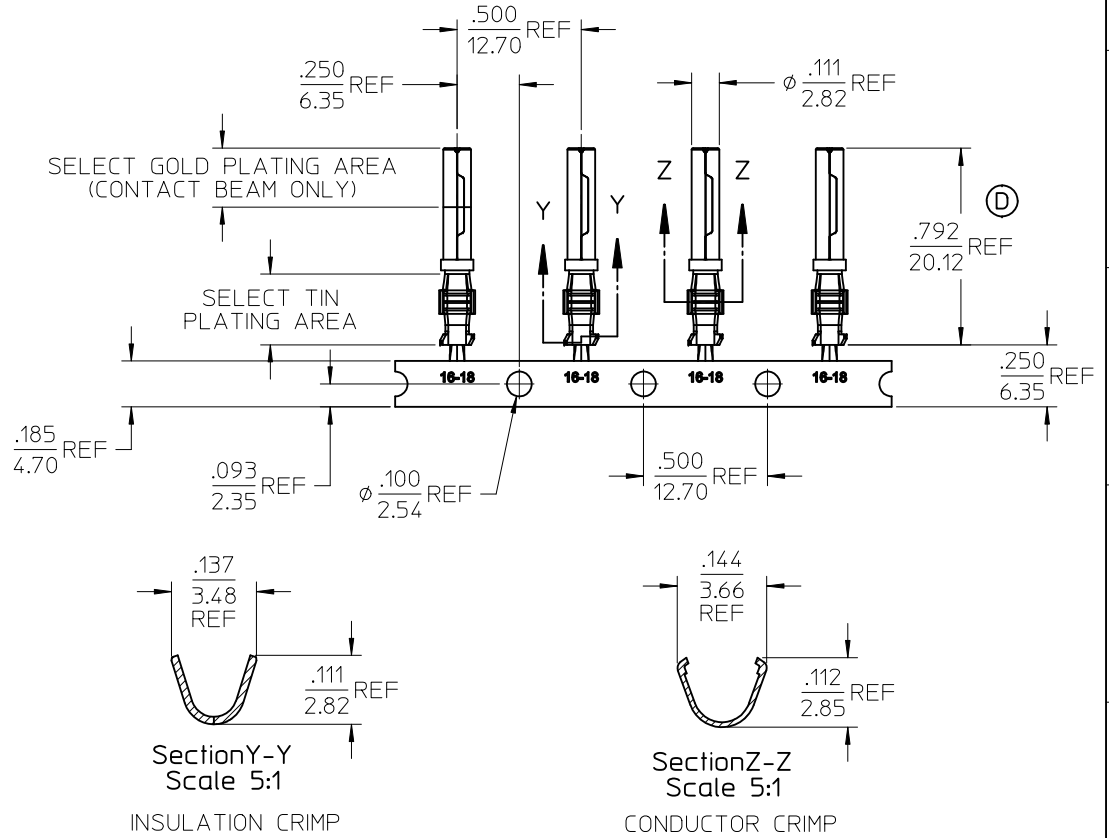


STRIP MATERIAL NUMBER	FINISH
84525-0009	SELECTIVE TIN 100μ INCH MINIMUM OVER NICKEL 80μ INCH MINIMUM OVERALL
84525-0032	SELECTIVE HARD GOLD 30μ INCH MINIMUM WITH SELECTIVE TIN 100μ INCH MINIMUM OVER NICKEL 50μ INCH MINIMUM OVERALL

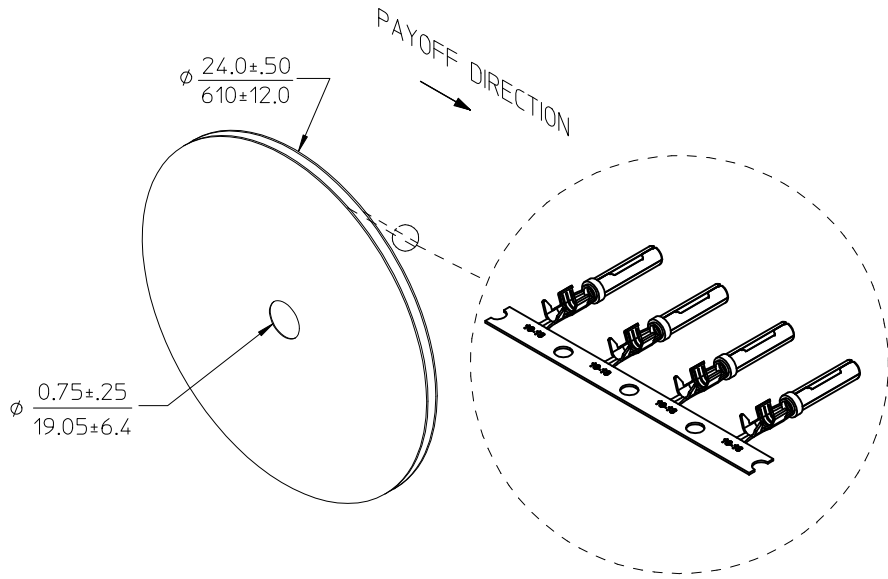

WIRE INSULATION O.D. RANGE  $\frac{.055-.085}{1.40-2.16}$

NOTES:

1. TERMINAL MATERIAL: COPPER ALLOY, .0118/0.300 THICK. FINISH: SEE CHART.
2. HOOD MATERIAL: STAINLESS STEEL, .006/0.15 THICK.
3. STRIP PARTS ARE REELED 3000 PARTS PER REEL AS SHOWN ABOVE.
4. TERMINAL FOR USE WITH SERIES XRC CONNECTOR ASSEMBLIES.
5. ALL MATERIALS AND FINISHES ARE ROHS COMPLIANT.

UPDATE LENGTH EC NO: IFG2012-0063 D/DRW:WLEUNG 2011/12/06 CHKD: APPR:DTITUS 2012/01/09	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
	$\nabla=0$ $\sphericalangle=0$	mm INCH 4 PLACES ± --- ± --- 3 PLACES ± --- ± .005 2 PLACES ± .13 ± --- 1 PLACE ± --- ± --- ANGULAR ± ---°	IN/MM	2:1	INCH	DRAWN BY: MODELL DATE: 2009/03/25 CHECKED BY: RDEROSS DATE: 2009/03/25 APPROVED BY: DTITUS DATE: 2010/12/06
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	SEE CHART	TITLE: XRC SOCKET W/SNAP WINDOW 16-18AWG .055"-.085" WIRE DIA MOLEX INCORPORATED		MATERIAL NO. DOCUMENT NO. SD-84525-001
			SIZE B	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		SHEET NO. 1 OF 1