

MICRO SWITCH
a Honeywell Division

FED. MFG. CODE 91929

ASSEMBLY-SWITCH

CATALOG LISTING
8AS190-V3L

KT-A1690

CATALOG LISTING
8AS190-V3L
PAGE 1 OF 1

M

ISSUE
5

REPLACES

RELEASE NO. PR-6416-T

CHECK

REVISIONS

A	CO 82462
	DCS 19 JAN 96
B	CO 82718
	DCS 15 MAR 96

CHECK

19 JAN 96

DCS



CHECK

19 JAN 96

DCS

FORMTEK

DRAWN

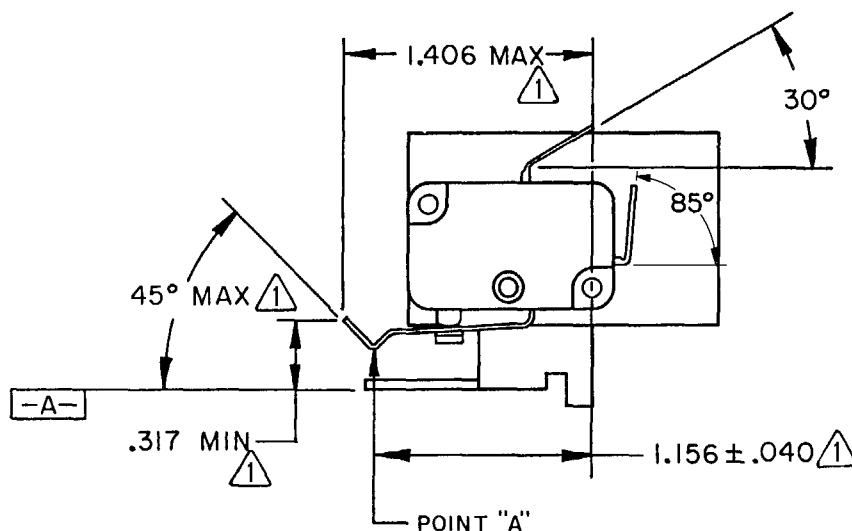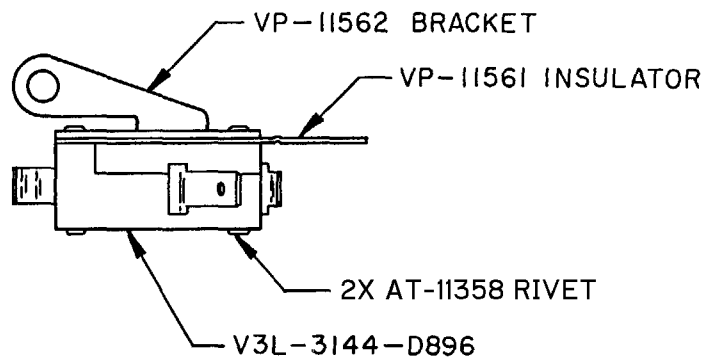


NOTES

- 1 MEASURED AT FREE POSITION
- 2 MEASURED AT FULL OVERTRAVEL FROM -A-

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS AT POINT "A"

OPERATING FORCE ----- 95 GRAMS MAX
(3.35 OZ)

DIFFERENTIAL TRAVEL ----- .042 MAX

TOTAL TRAVEL ----- 2 .317 MIN

OPERATE POSITION ----- .235 ± .025

ELECTRICAL DATA

CONTACT ARRANGEMENT

S P N C

SCALE FULL

DO NOT
SCALE PRINT

UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE

ONE PLACE (.0) ±.030

TWO PLACE (.00) ±.015

THREE PLACE (.000) ±.005

ANGLES ±

WEIGHT