

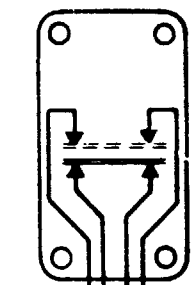

MICRO SWITCH

A DIVISION OF MINNEAPOLIS HONEYWELL REGULATOR COMPANY
MINNEAPOLIS, MINN. 55412
FED. MFR. CODE 91929

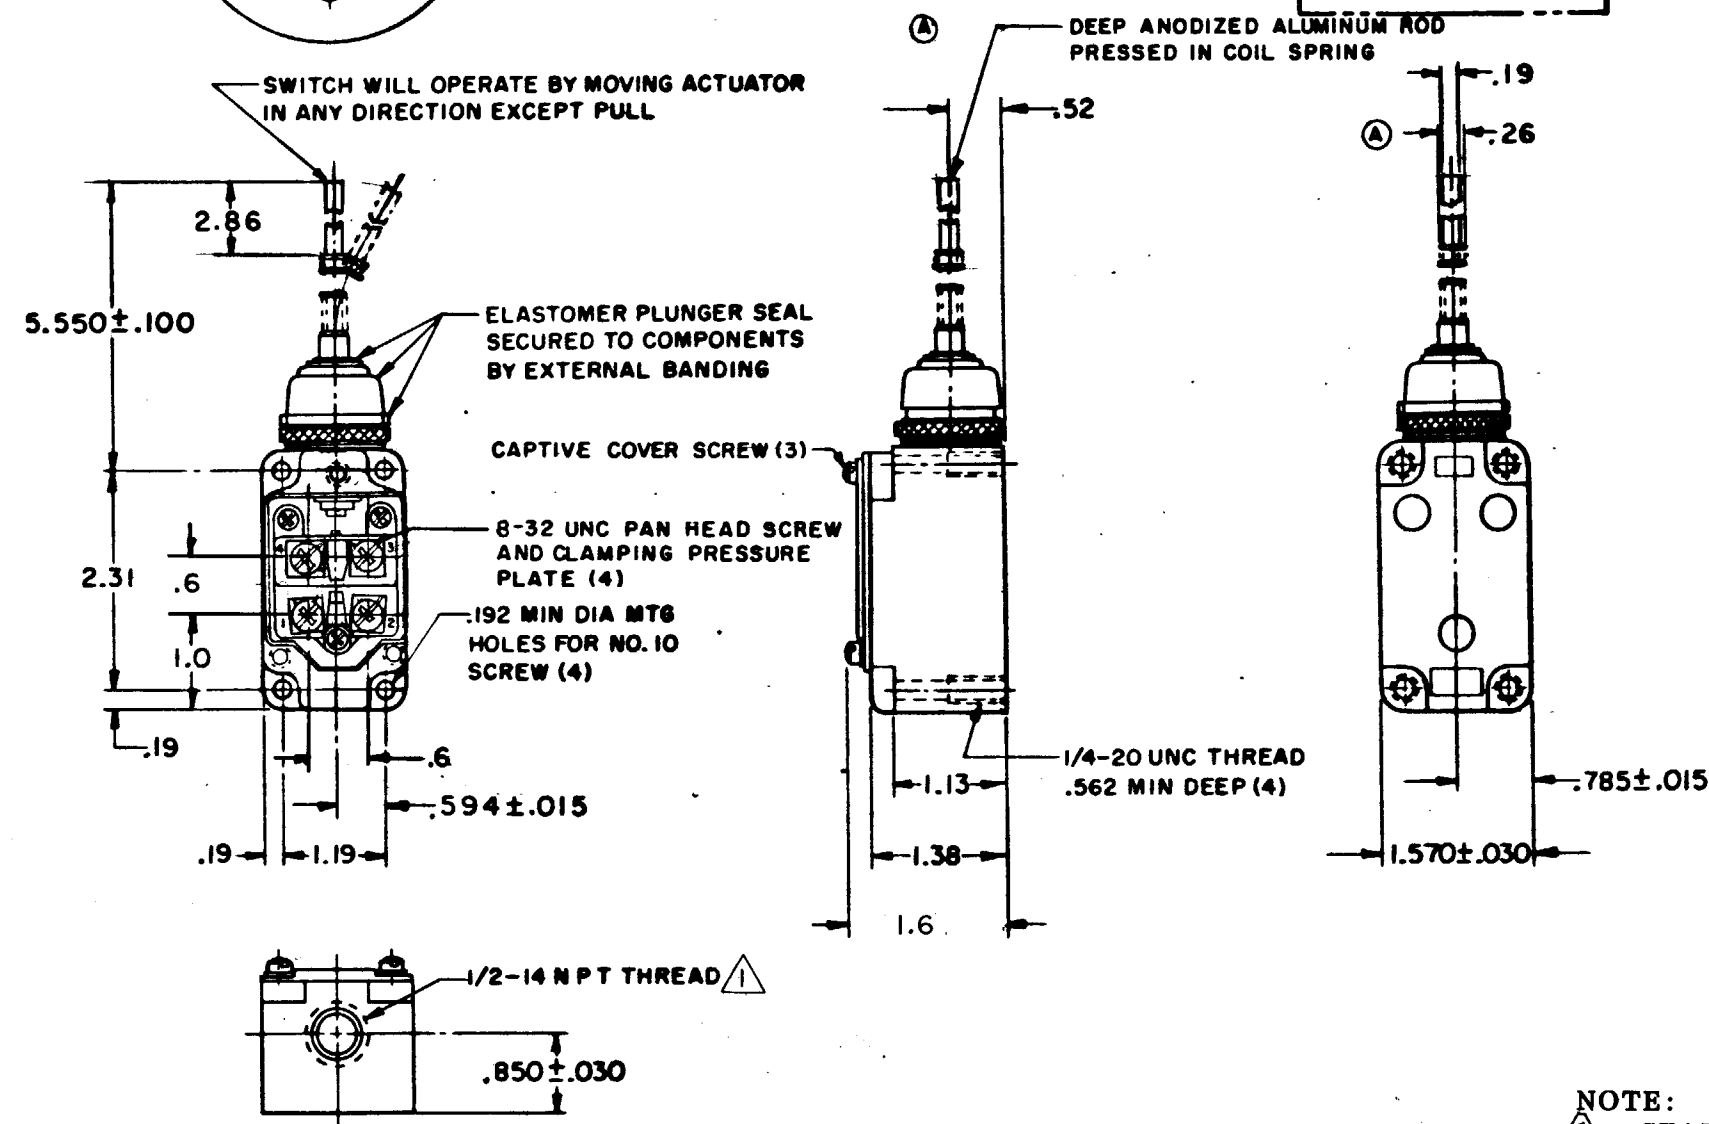
SWITCH-ENCLOSED

CATALOG LISTING

8LS3

CIRCUIT
DIAGRAM

1.125 MAX OPERATING POSITION

SWITCH WILL OPERATE BY MOVING ACTUATOR
IN ANY DIRECTION EXCEPT PULLNOTE:
① SEAL TO BE PROVIDED BY USER

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING POSITION — — — 1.125 MAX
IN ANY DIRECTION

OPERATING FORCE — — — 5 OZ MAX

FORCE AT 2.0 — — — 10 OZ MAX

SWITCH-BASIC REPLACEMENT — — 2 MNI

ELECTRICAL DATA

CONTACT ARRANGEMENT
(SEE CIRCUIT DIAGRAM)10A-120, 240 OR 480 VAC
1/3 HP-120 VAC; 3/4 HP-240 VAC
0.8A-115 VDC; 0.4A-230 VDC; 0.1A-550 VDC
PILOT DUTY 600 VAC MAX

SCALE 1/2 TO 1

DO NOT SCALE PRINT

UNLESS OTHERWISE
SPECIFIED
DIMENSIONS ARE IN INCHESTOLERANCES ARE:
ONE PLACE (.0) ±.030
TWO PLACE (.00) ±.015
THREE PLACE (.000) ±.005
ANGLES ±

WEIGHT

8LS3

PAGE 1 OF 1

M

DRAWING
NUMBER

II

ISSUE

REVISIONS

A	CO 18749	27 FEB 62	MSF
B	CO 23408	26 SEP 68	MSF
C	CO 25152	19 APR 69	DAW
D	CO 27048	18 FEB 70	SNH
E	CO 38805	28 JUN 77	RRR
F	CO 50952-F	9 JUNE 83	TSK
G	CO 53005-D	1 AUG 84	CJH
H	CO 65814-E	21 NOV 90	GRY
J	CO 77031	22 DEC 93	JDB
K	CO 94494		JAT

FORMTEK

FO-50378-003

DRAWN

REPLACES

RELEASE NO. SR9894

CHECK

CHECK

CHECK

RER 25 OCT 61