


MICRO SWITCH
a Honeywell Division

FED. MFG. CODE 91929

MINIATURE PRECISION LIMIT SWITCH

CATALOG LISTING

914CE18-3



914CE18-3

M

DRAWING
NUMBER

3

ISSUE

RELEASE NO. PR-6431-T REPLACES

CHECK

REVISIONS

A CO-69061
S A V
4 OCT 91

CHECK

CHECK

4 OCT 91

DRAWN


S A V

.071 MAX
PRETRAVEL

.980 ±.039
OPERATING
POSITION

2.480 MAX

36.000 MIN

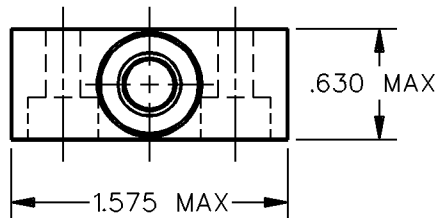

2X Ø .200 ±.010
MOUNTING HOLES
(Ø .40 C'BORE
.24 DEEP)

.300 ±.010

1.732 MAX

P.V.C. SHEATHED CABLE
18/4 S.J.T.O.

.984 ±.010

Ø.280 STAINLESS
STEEL PLUNGER

NEOPRENE
SEAL


NOTES

1 - ZINC HOUSING FINISHED WITH GRAY PAINT

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE — — — — 5 LB MAX
DIFFERENTIAL TRAVEL — — — .004 MAX
OVERTRAVEL — — — — — .118 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

5A 1/10HP 125 OR 250 VAC



SCALE FULL

DO NOT
SCALE PRINT

UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE

ONE PLACE (.0) ±.030

TWO PLACE (.00) ±.015

THREE PLACE (.000) ±.005

ANGLES ±

WEIGHT

DDM/CAD