
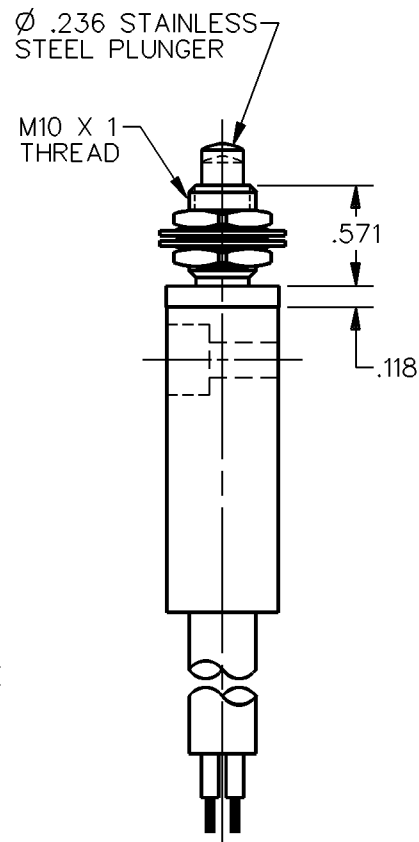
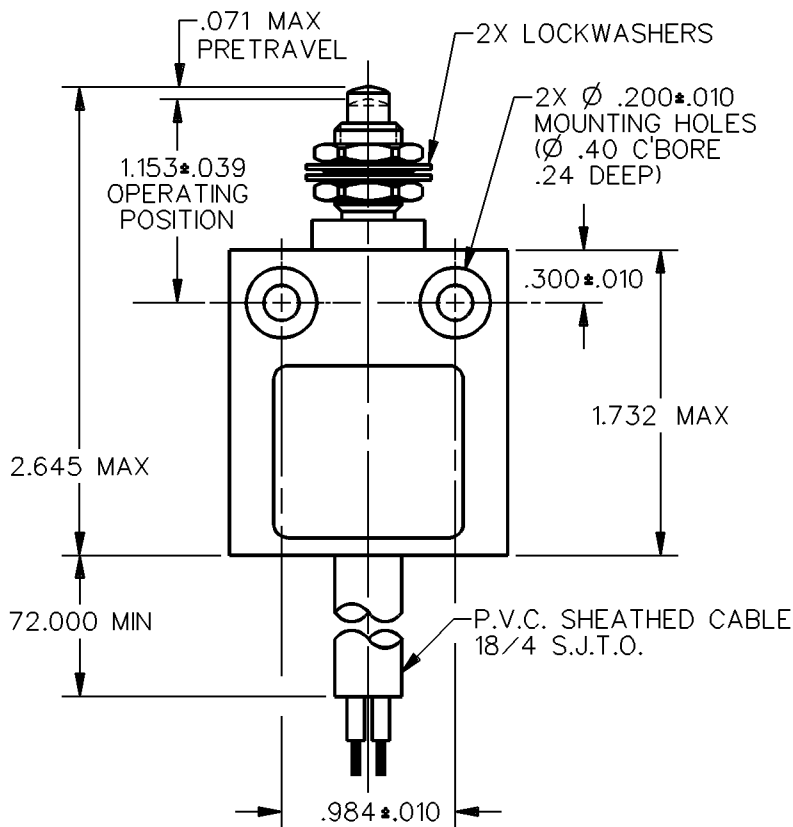


FED.MFG.CODE 91929

CATALOG LISTING

CIRCUIT DIAGRAM

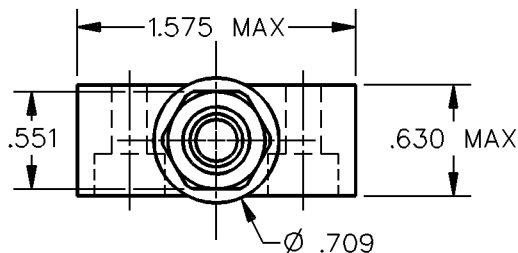


1 - ZINC HOUSING FINISHED WITH GRAY PAINT
2 - SWITCH MOUNTS THRU A Ø.413 HOLE
3 - .165 MAX PANEL THICKNESS

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL	DO NOT SCALE PRINT
OPERATING FORCE 2 LBS 10 1/2 OZ MAX	CONTACT ARRANGEMENT	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
RELEASE FORCE — — — — 1 LB MIN	S P D T	ONE PLACE (.0)	± .030
DIFFERENTIAL TRAVEL — — — .004 MAX	5A — 250 VAC 1/10HP — 125 OR 250 VAC  	TWO PLACE (.00)	± .015
OVERTRAVEL — — — — .118 MIN		THREE PLACE (.000)	± .005
		ANGLES	±
		WEIGHT	