

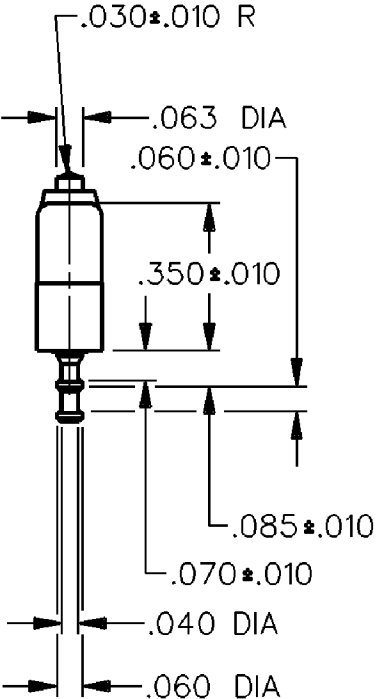
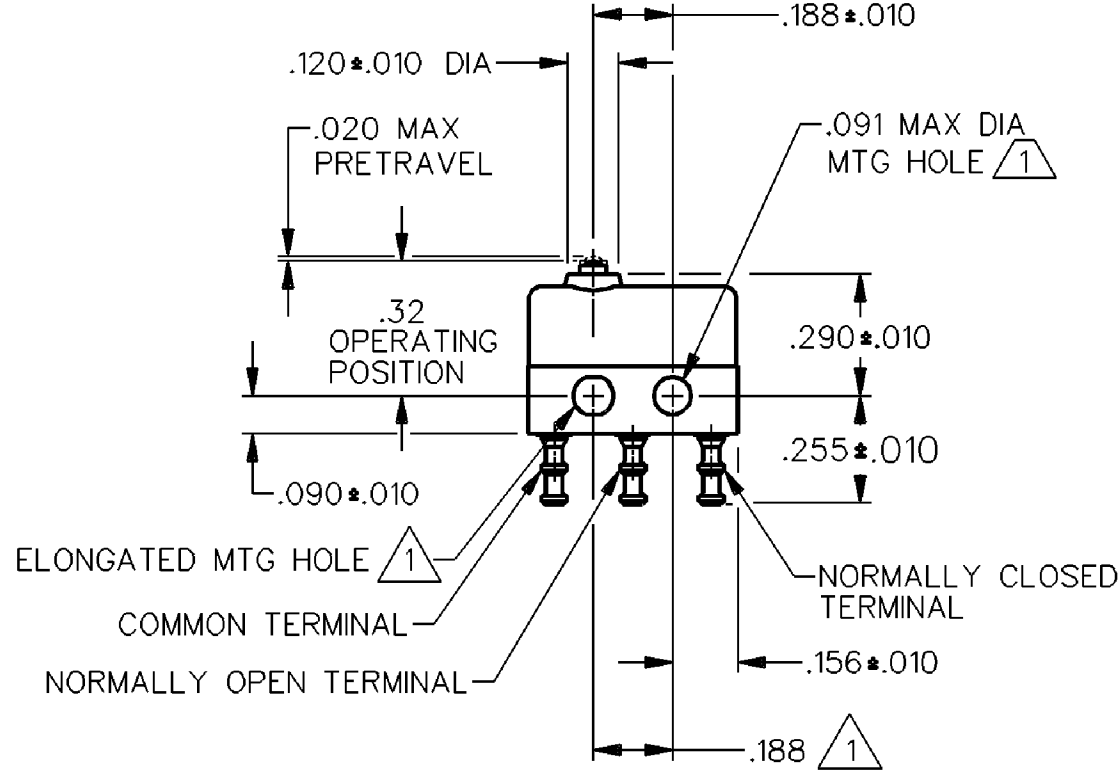


HONEYWELL PART NUMBER
91SX39-T2
PRODUCT CODE VDQ9101
MILITARY PART NUMBER M8805/109-02

REV	DOCUMENT	CHANGED BY	CHECK
2	0038450	PK 03JUN08	ASD

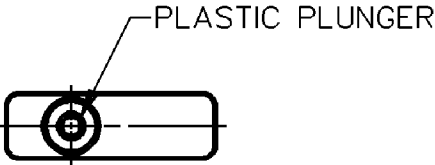

NOTES
1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .087 MAX DIA ON .188 ±.002 CENTERS
2 - TERMINALS ARE PLATED FOR SOLDERING

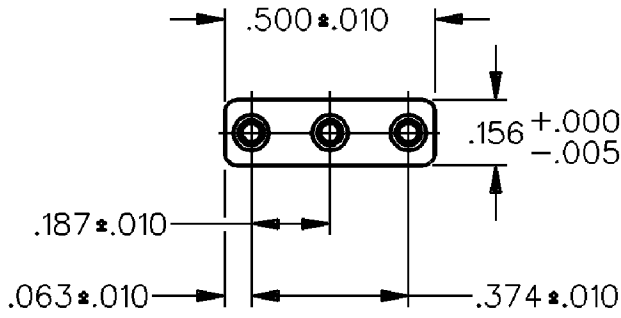

RELEASE NO.	PR-16148
REPLACES	

CHARACTERISTICS		ELECTRICAL DATA				DESIGN UNITS: INCH	DRAWN	SPK	05MAR08	Honeywell			
OPERATING FORCE ----- 5 OZ MAX		CONTACT ARRANGEMENT SPDT				TOLERANCES UNLESS NOTED:	CHECK	RJ	05MAR08				
RELEASE FORCE ----- 1 OZ MIN		28 VOLTS DC RATING				NO PLACE X ±	THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.				TITLE		
DIFFERENTIAL TRAVEL --- .005 MAX		SEA LEVEL 50,000 FT SEA LEVEL				ONE PLACE .X ±					SWITCH - BASIC		
OVERTRAVEL ----- .004 MIN		INDUCTIVE 4 AMP 2.5 AMP 7 AMP				TWO PLACE .XX ±					SIZE	TYPE	DRAWING NAME
		RESISTIVE 7 AMP 4 AMP 7 AMP				THREE PLACE .XXX ±					B	I	91SX39-T2
		LAMP 2.5 AMP 2.5 AMP 2 AMP				FOUR PLACE .XXXX ±	INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY				REV		
						ANGLES ±					2		
		THIRD ANGLE PROJECTION					RASTER				SCALE	-	WEIGHT: .003 LB MAX
											SHEET 1 OF 1		