


REV	DOCUMENT	CHANGED BY	CHECK
3	0038450	PK 03JUN08	ASD

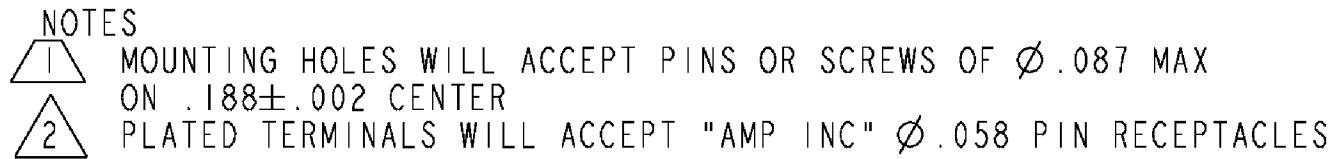

RELEASE NO.	PR-19501
REPLACES	X90667-SX

CHARACTERISTICS		ELECTRICAL DATA				DESIGN UNITS: INCH TOLERANCES UNLESS NOTED:		DRAWN	SPK	05MAR08								
OPERATING FORCE ----- 5 OZ MAX		CONTACT ARRANGEMENT S P D T						CHECK	RJ	05MAR08								
RELEASE FORCE----- 1 OZ MIN			28 VOLTS DC RATING		115 VOLTS AC, 60 CPS	NO PLACE X ± ONE PLACE .X ± 0.030 TWO PLACE .XX ± 0.015 THREE PLACE .XXX ± 0.005 FOUR PLACE .XXXX ± ANGLES ±		THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			TITLE SWITCH - BASIC							
DIFFERENTIAL TRAVEL--- .005 MAX			SEA LEVEL		50,000 FT										SEA LEVEL			
OVERTRAVEL----- .004 MIN		INDUCTIVE	4 AMP	2.5 AMP	7 AMP			INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY			SIZE	TYPE	DRAWING NAME		REV			
		RESISTIVE	7 AMP	4 AMP	7 AMP						B	I	91SX40-H58		3			
		LAMP	2.5 AMP	2.5 AMP	2 AMP	THIRD ANGLE PROJECTION 		RASTER			SCALE	-	WEIGHT: .003 LB MAX	SHEET	1 OF 1			
		APPROVALS																