


REV	DOCUMENT	CHANGED BY	CHECK
5	0038450	PK 03JUN08	ASD

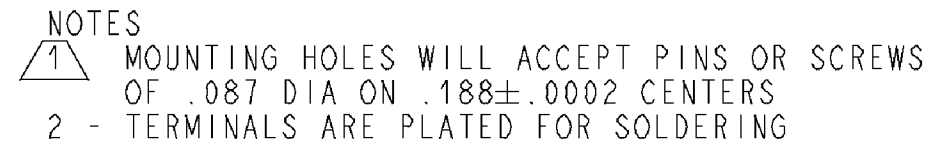

RELEASE NO.	PR-17692
REPLACES	

CHARACTERISTICS		ELECTRICAL DATA				DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± ONE PLACE .X ± 0.030 TWO PLACE .XX ± 0.015 THREE PLACE .XXX ± 0.005 FOUR PLACE .XXXX ± ANGLES ±				DRAWN	SPK	04MAR08	Honeywell							
OPERATING FORCE ----- 5 OZ MAX		CONTACT ARRANGEMENT SPDT								CHECK	RJ	04MAR08						TITLE SWITCH - BASIC		
RELEASE FORCE----- 1 OZ MIN			28 VOLTS DC RATING		115 VOLTS AC, 60 CPS		THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.				INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY	SIZE	TYPE	DRAWING NAME		REV				
DIFFERENTIAL TRAVEL--- .005 MAX		INDUCTIVE	4 AMP	2.5 AMP	7 AMP	B						I	91SX41		5					
OVERTRAVEL----- .004 MIN		RESISTIVE	7 AMP	4 AMP	7 AMP	THIRD ANGLE PROJECTION 						SCALE	-	WEIGHT:.003 LB MAX	SHEET 1 OF 1					
		LAMP	2.5 AMP	2.5 AMP	2 AMP															
		APPROVALS																		