
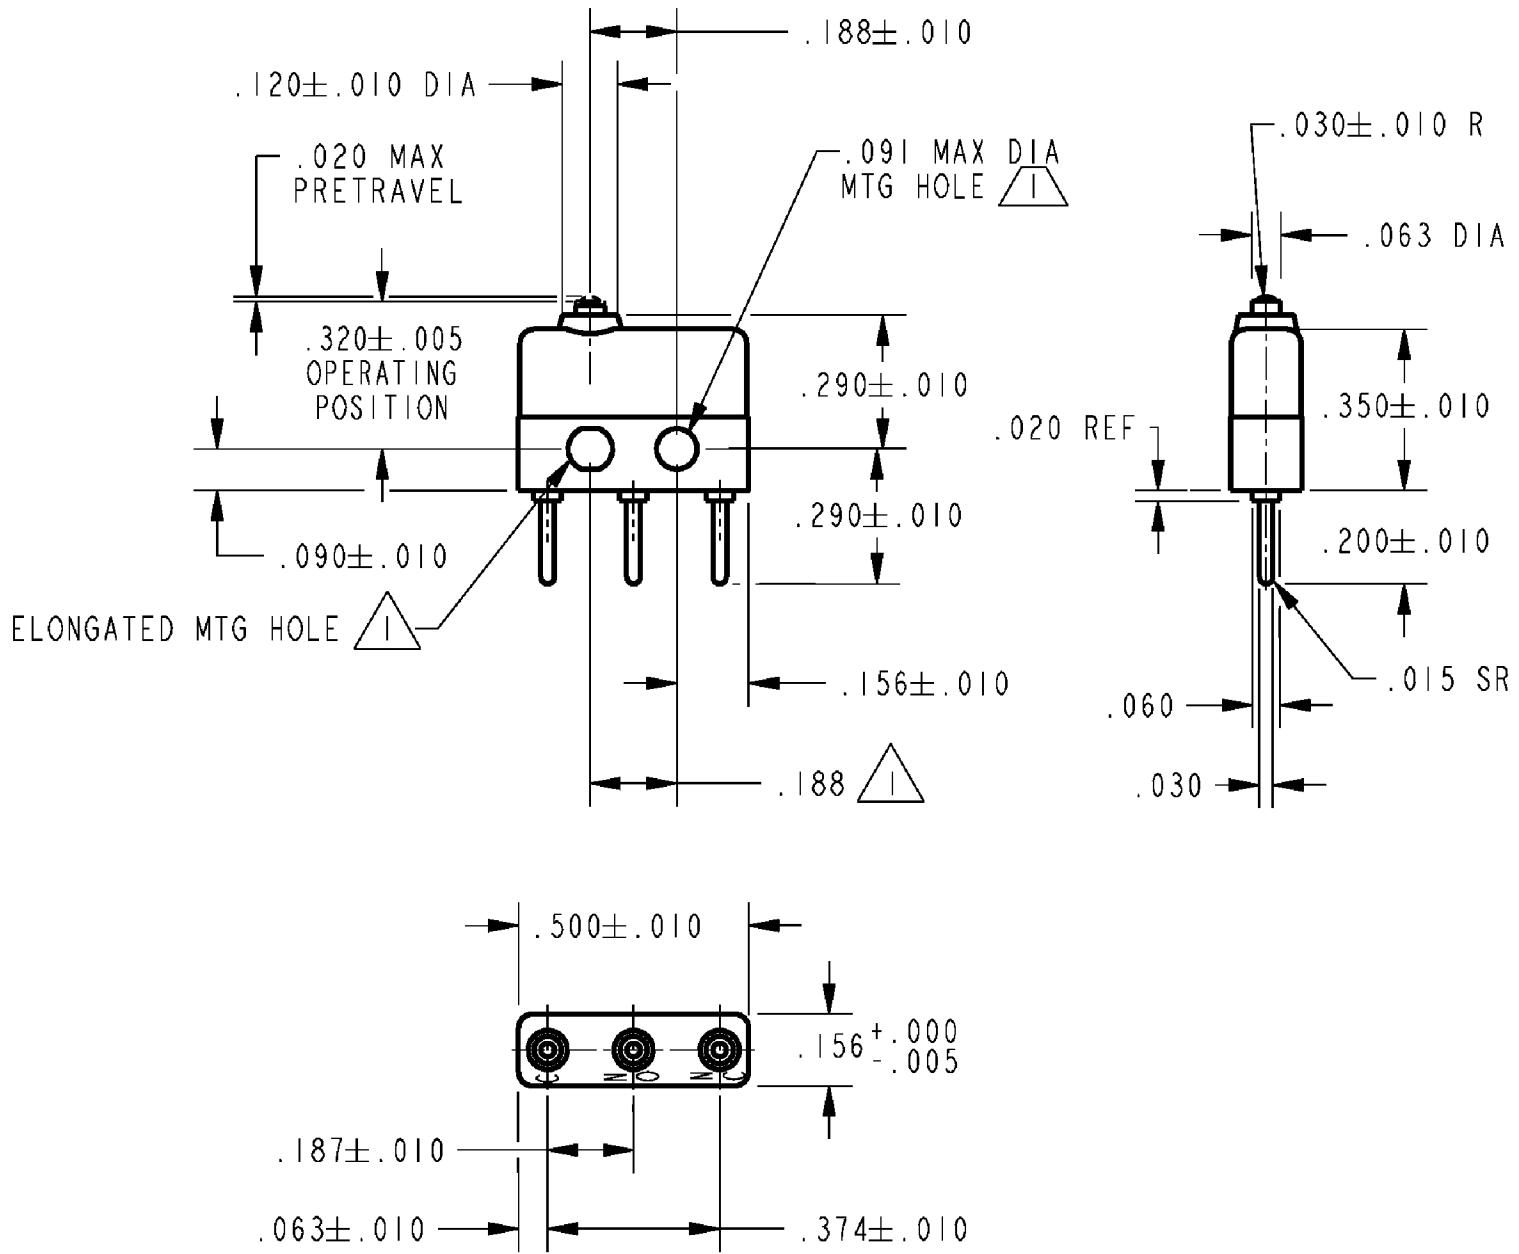


HONEYWELL PART NUMBER
91SX43
PRODUCT CODE VDQ9120

REV	DOCUMENT	CHANGED BY	CHECK
3	0038450	PK 03JUN08	ASD

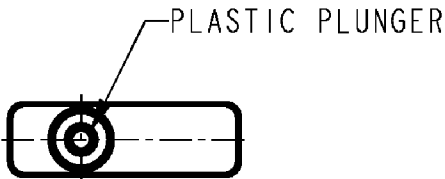

NOTES
MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .087 MAX DIA ON .188±.002 CENTERS
2 - TERMINALS ARE PLATED FOR SOLDERING

RELEASE NO.
PR-17694-T
REPLACES

CHARACTERISTICS		ELECTRICAL DATA				DESIGN UNITS: INCH	DRAWN	SPK	04MAR08	Honeywell			
OPERATING FORCE----- 5 OZ MAX		CONTACT ARRANGEMENT SPDT				TOLERANCES UNLESS NOTED:	CHECK	RJ	04MAR08				
RELEASE FORCE----- 1 OZ MIN		28 VOLTS DC RATING 115 VOLTS AC, 60 CPS				NO PLACE X ±	THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.				TITLE		
DIFFERENTIAL TRAVEL--- .005 MAX		SEA LEVEL 50,000 FT SEA LEVEL				ONE PLACE .X ±					SWITCH - BASIC		
OVERTRAVEL----- .004 MIN		INDUCTIVE 4 AMP 2.5 AMP 7 AMP				TWO PLACE .XX ±					SIZE	TYPE	DRAWING NAME
		RESISTIVE 7 AMP 4 AMP 7 AMP				THREE PLACE .XXX ±					B	I	91SX43
		LAMP 2.5 AMP 2.5 AMP 2 AMP				FOUR PLACE .XXXX ±	INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY				REV		
		APPROVALS				ANGLES ±					3		
						THIRD ANGLE PROJECTION	RASTER				SCALE	-	WEIGHT:.003 LB MAX
											SHEET 1 OF 1		