

HONEYWELL PART NUMBER
91SX46-H58
PRODUCT CODE VDQ9329

REV	DOCUMENT	CHANGED BY	CHECK
3	0038450	PK 03JUN08	ASD



B

A

A

B

A

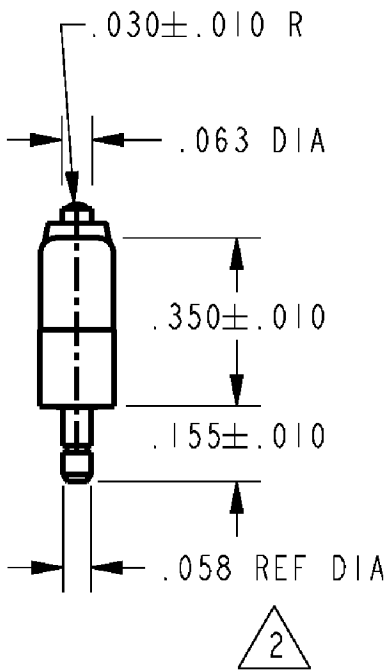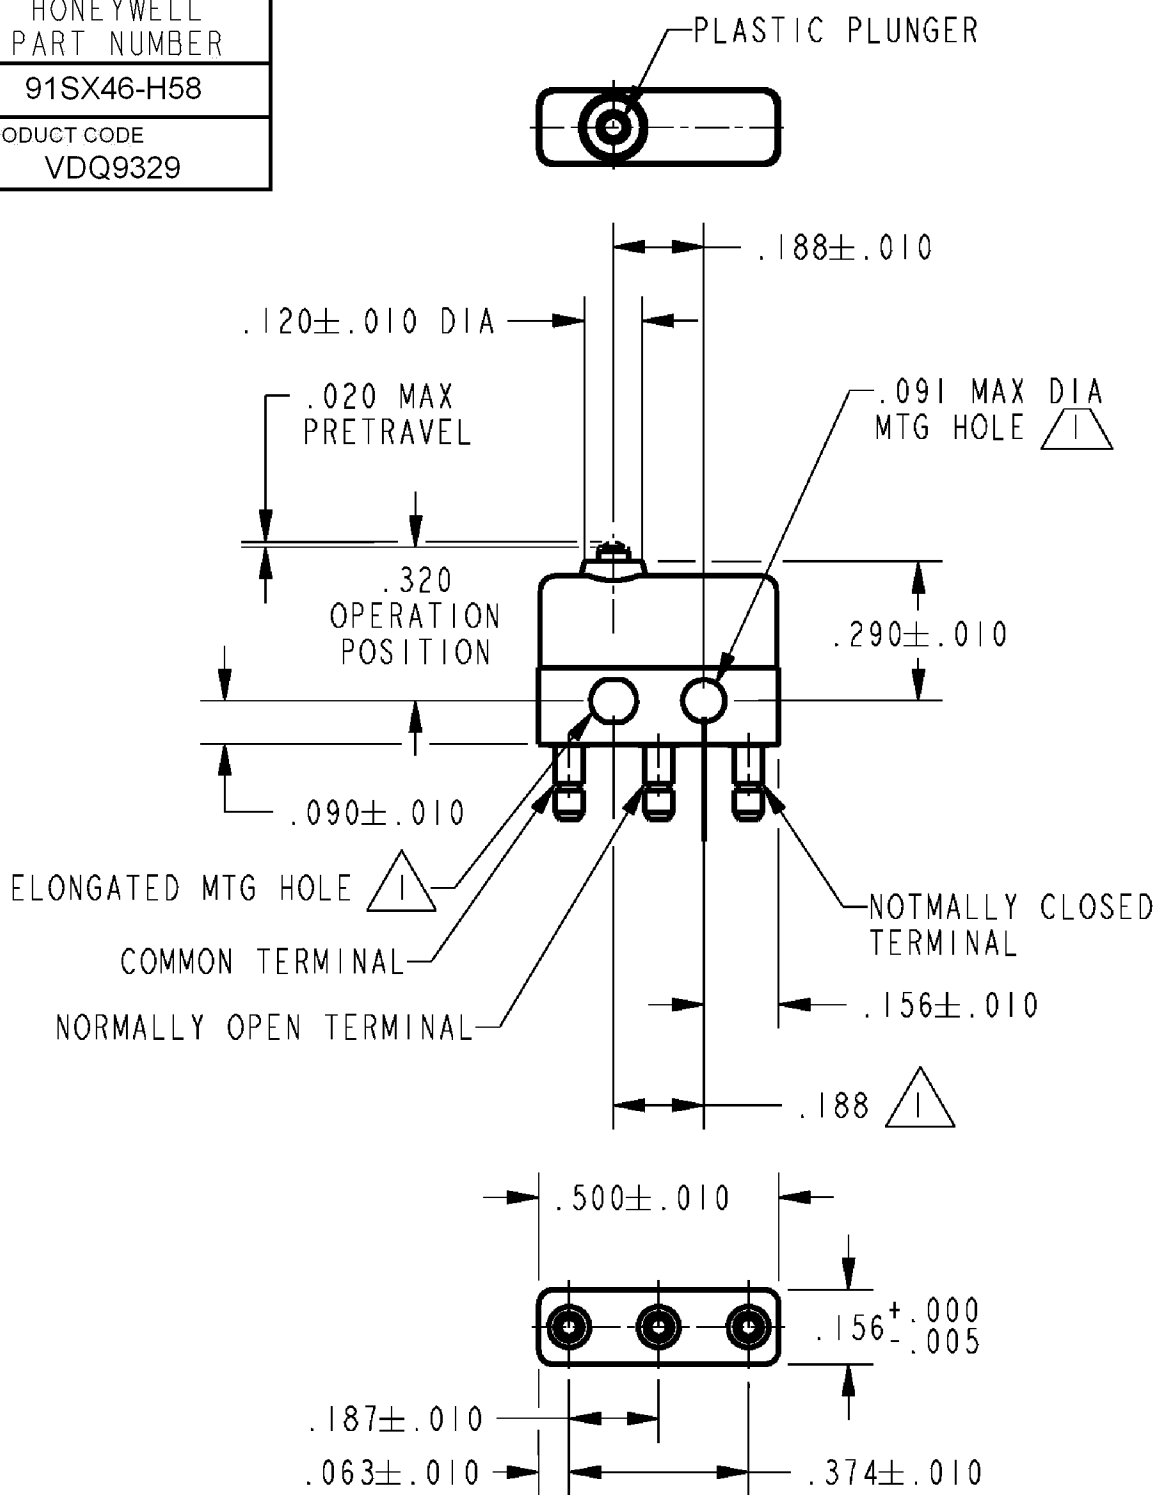

NOTES
1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .188±.002 CENTERS
2 PLATED TERMINALS WILL ACCEPT "AMP INC" .058 DIA PIN RECEPTACLES

RELEASE NO.	PR-18213
REPLACES	X91859-SX

CHARACTERISTICS		ELECTRICAL DATA				DESIGN UNITS: INCH		DRAWN	SPK	04MAR08	Honeywell					
OPERATING FORCE ----- 3 OZ MAX		CONTACT ARRANGEMENT S P D T				TOLERANCES UNLESS NOTED:		CHECK	RJ	04MAR08						
RELEASE FORCE----- 1 OZ MIN			28 VOLTS DC RATING		115 VOLTS AC, 60 CPS		NO PLACE X ±	0.030 0.015 0.005	THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			TITLE SWITCH - BASIC				
DIFFERENTIAL TRAVEL--- .005 MAX			SEA LEVEL		SEA LEVEL		ONE PLACE .X ±									
OVERTRAVEL----- .004 MIN		INDUCTIVE	4 AMP	2.5 AMP	7 AMP		TWO PLACE .XX ±									
		RESISTIVE	7 AMP	4 AMP	7 AMP		THREE PLACE .XXX ±									
		LAMP	2.5 AMP	2.5 AMP	2 AMP		FOUR PLACE .XXXX ±									
		APPROVALS					THIRD ANGLE PROJECTION		INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY			SIZE	TYPE	DRAWING NAME		REV
												B	I	91SX46-H58		3
												RASTER		SCALE	-	WEIGHT:.003 LB MAX