





MICRO SWITCH
a Honeywell Division

FED. MFG. CODE 91929

MINIATURE PRECISION LIMIT SWITCH

CATALOG LISTING

924CE1-S3

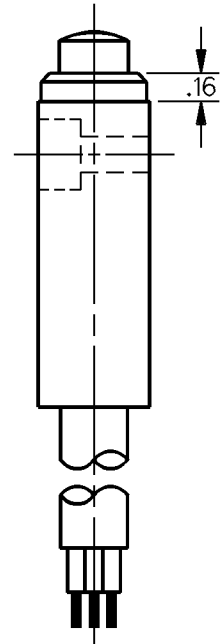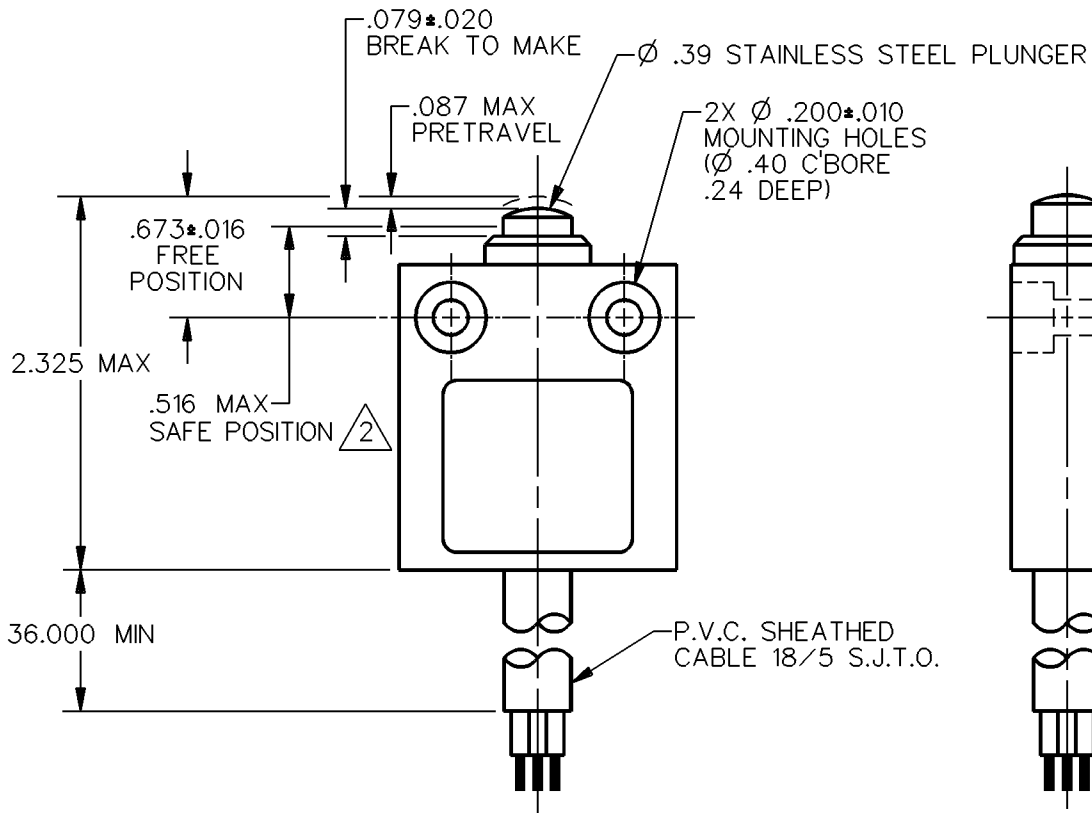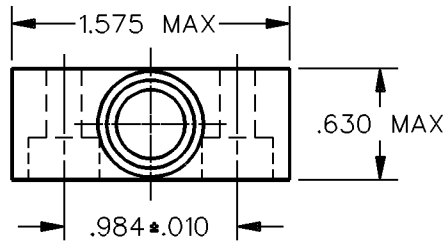


NOTES

- 1 - ZINC HOUSING FINISHED WITH GRAY PAINT
- 2 THE MINIMUM PLUNGER TRAVEL PAST BREAK, FOR A SAFE CONTACT GAP IS .060
- 3 - SWITCH PROVIDES BREAK BEFORE MAKE CIRCUITRY

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL	DO NOT SCALE PRINT
OPERATING FORCE — — — 5.1 LB MAX OVERTRAVEL — — — — .039 MIN	CONTACT ARRANGEMENT S P D T D B	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
	10A-250 VAC 1/3HP-125 OR 250 VAC		
		ONE PLACE (.0) ±.030	
		TWO PLACE (.00) ±.015	
		THREE PLACE (.000) ±.005	
		ANGLES ±	
		WEIGHT	

DDM/CAD

DRAWN

S A V 29 AUG 91

CHECK

RELEASE NO. PR-14729

REPLACES

924CE1-S3

M

DRAWING NUMBER

2

ISSUE

CHECK

REVISIONS

A CO-69061

S A V

29 AUG 91