


MICRO SWITCH
a Honeywell Division

FED. MFG. CODE 91929




MINIATURE PRECISION LIMIT SWITCH

CATALOG LISTING

924CE2-Y3



CIRCUIT DIAGRAM

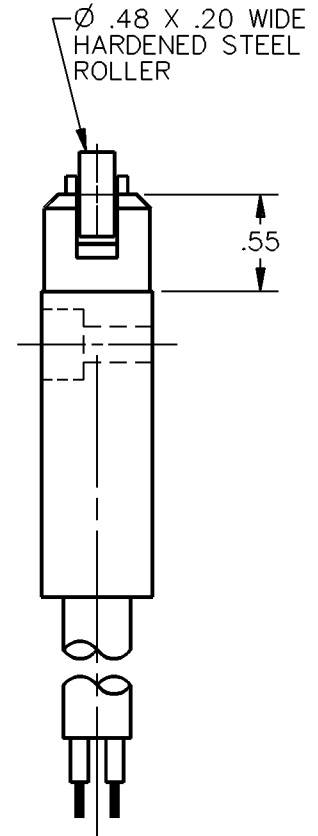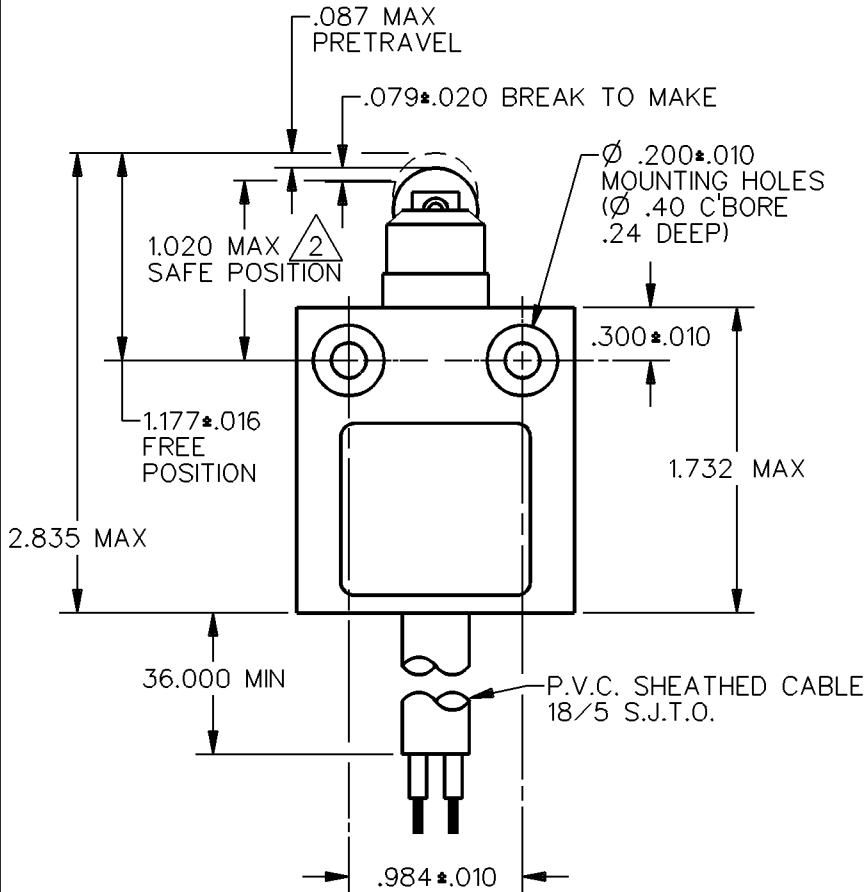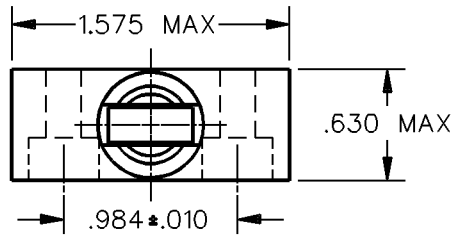


NOTES

- 1 - ZINC HOUSING FINISHED WITH GRAY PAINT
- 2 - THE MINIMUM PLUNGER TRAVEL PAST BREAK, FOR A SAFE CONTACT GAP IS .060

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL	DO NOT SCALE PRINT
OPERATING FORCE — — — 5.1 LB MAX	CONTACT ARRANGEMENT S P N C D B	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
OVERTRAVEL — — — — .039 MIN			
	10A 125 OR 250 VAC 1/3 HP 125 OR 250 VAC		
	 		
		ONE PLACE (.0) ±.030 TWO PLACE (.00) ±.015 THREE PLACE (.000) ±.005 ANGLES ±	
		WEIGHT	

924CE2-Y3

M

DRAWING
NUMBER

ISSUE
1

REPLACES

RELEASE NO. PR-18295

CHECK

REVISIONS

CHECK

DDM/CAD

DRAWN

S A V 11 OCT 91