



MICRO SWITCH
a Honeywell Division

FED.MFG.CODE 91929

MINIATURE PRECISION LIMIT SWITCH

CATALOG LISTING

924CE2-Y9

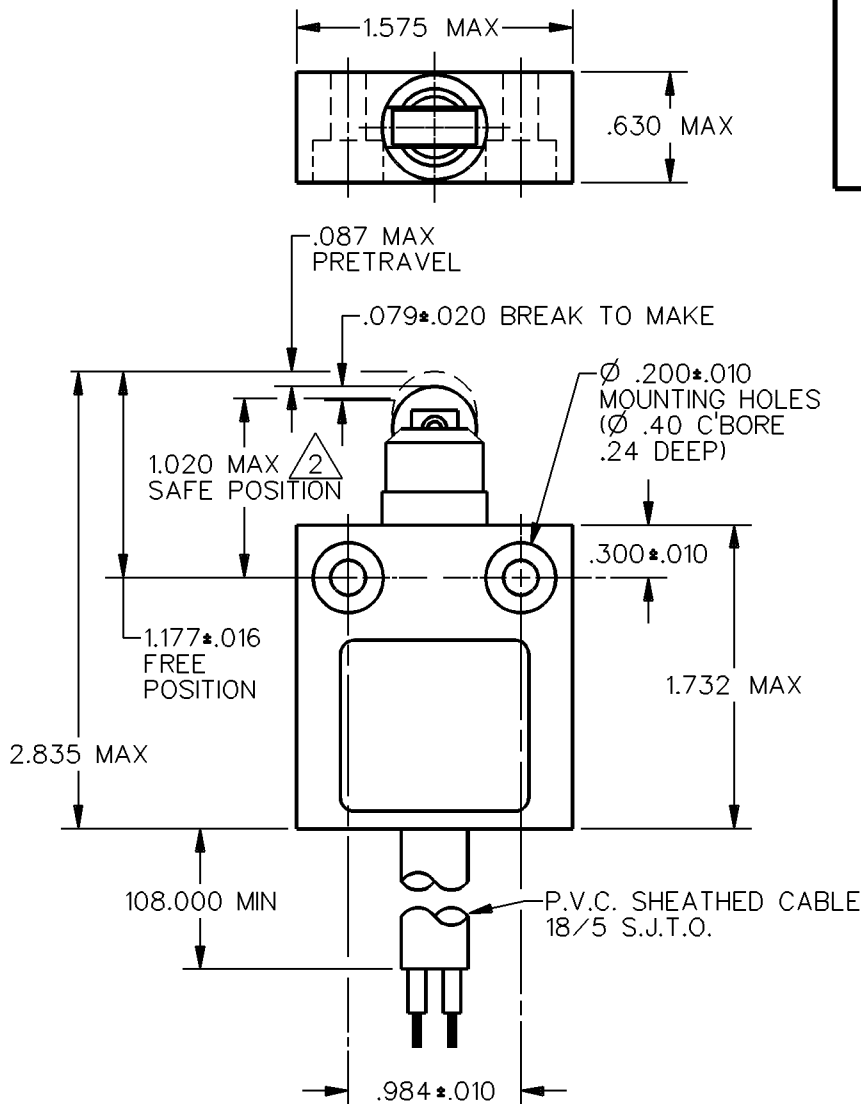


NOTES

- 1 - ZINC HOUSING FINISHED WITH GRAY PAINT
- 2 - THE MINIMUM PLUNGER TRAVEL PAST BREAK, FOR A SAFE CONTACT GAP IS .060

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS		ELECTRICAL DATA		SCALE	FULL	DO NOT SCALE PRINT
OPERATING FORCE — — — 5.1 LB MAX		CONTACT ARRANGEMENT S P N C D B		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		
OVERTRAVEL — — — .039 MIN		L93 10A 125 OR <u>250</u> VAC 1/3 HP 125 OR <u>250</u> VAC  				
				ONE PLACE (.01) ±.030		
				TWO PLACE (.00) ±.015		
				THREE PLACE (.000) ±.005		
		ANGLES ±				
		WEIGHT				

924CE2-Y9

M

DRAWING
NUMBER

1

ISSUE

REPLACES

RELEASE NO. PR-18501

CHECK

REVISIONS

CHECK

CHECK

25 JUL 90

DRAWN

SLB

DDM/CAD