

MICRO SWITCH
 FREEPORT ILLINOIS, U.S.A.
 A DIVISION OF HONEYWELL
 FED. MFG. CODE 91929

MINIATURE PRECISION LIMIT SWITCH

CATALOG LISTING
924CE3-S6

924CE3-S6

M

DRAWING
 NUMBER

2

ISSUE

REPLACES

RELEASE NO. PR-16015

CHECK

REVISIONS

A C069061

LJF

15 AUG 91

CHECK

DEC 87

MAM

DEC 87



DEC 87

DEC 87

DEC 87


FO-52948-A

DRAWN

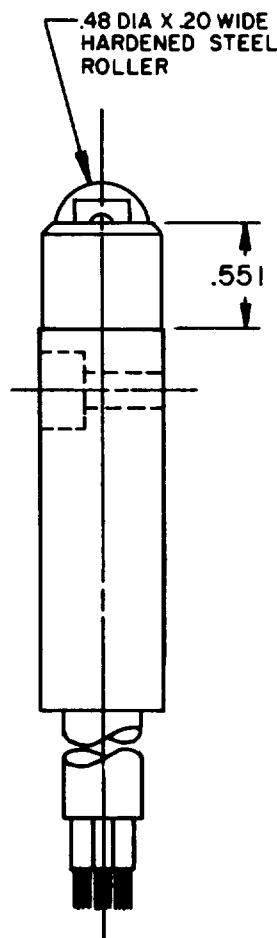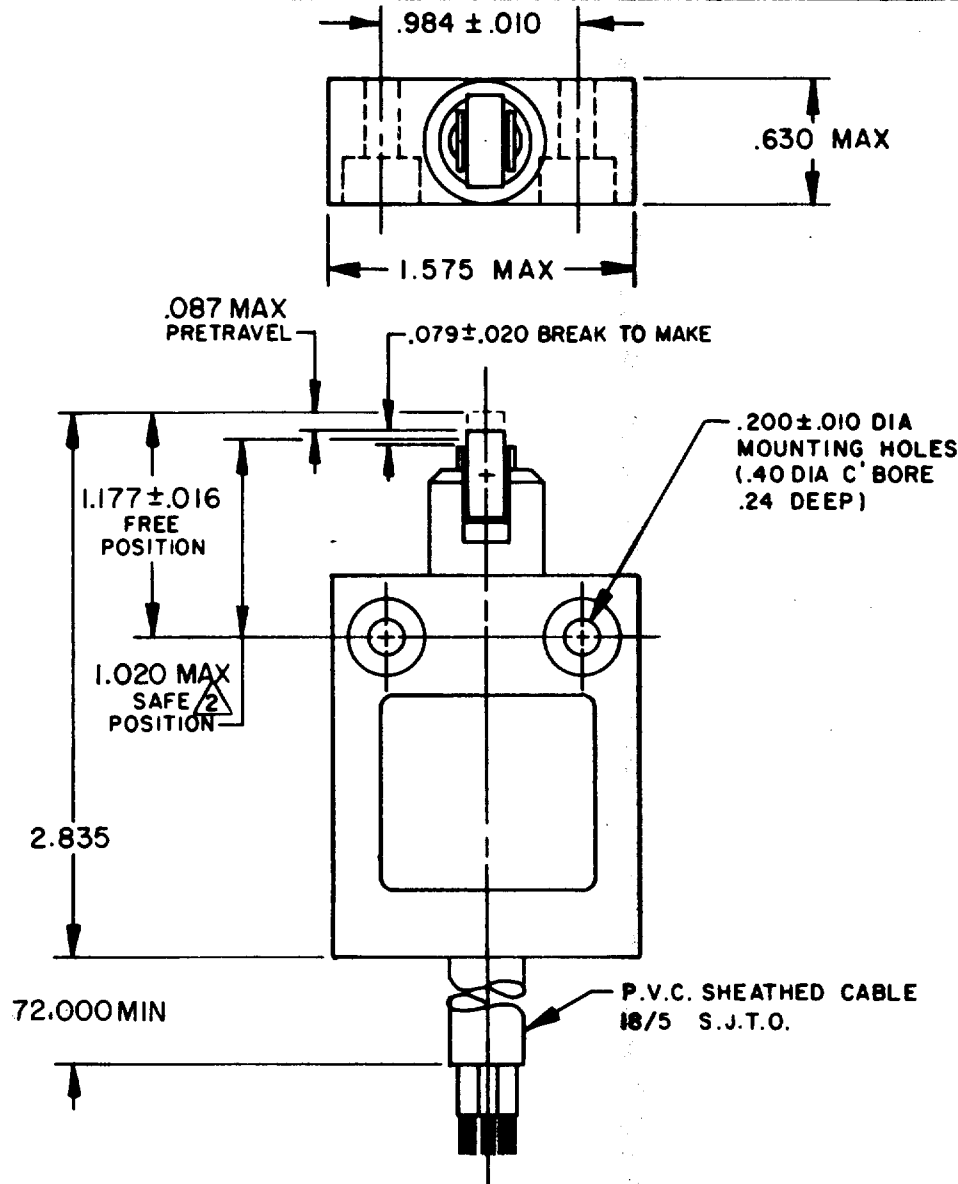

NOTES

- 1 - ZINC HOUSING FINISHED WITH GRAY PAINT
- 2 THE MINIMUM PLUNGER TRAVEL PAST BREAK, FOR A SAFE CONTACT GAP IS .060
- 3 - SWITCH PROVIDES BREAK BEFORE MAKE CIRCUITRY



CIRCUIT DIAGRAM

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

CHARACTERISTICS

OPERATING FORCE ----- 5.1 LB MAX

OVERTRAVEL ----- .039 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
 S P D T D B

10A-250 VAC
 1/3 HP-125 OR 250 VAC

SCALE

FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED
 TOLERANCES ARE

ONE PLACE (.0) $\pm .030$
 TWO PLACE (.00) $\pm .015$
 THREE PLACE (.000) $\pm .005$
 ANGLES $\pm$

WEIGHT