

MICRO SWITCH
 FREEPORT ILLINOIS, U.S.A
 A DIVISION OF HONEYWELL
 FED. MFG. CODE 91929

MINIATURE PRECISION LIMIT SWITCH

924CE3-Y3

924CE3-Y3

DRAWING
 NUMBER

2

ISSUE

REPLACES

RELEASE NO. PR 14729


CHECK

CHECK

NOV 86


CHECK

NOV 86

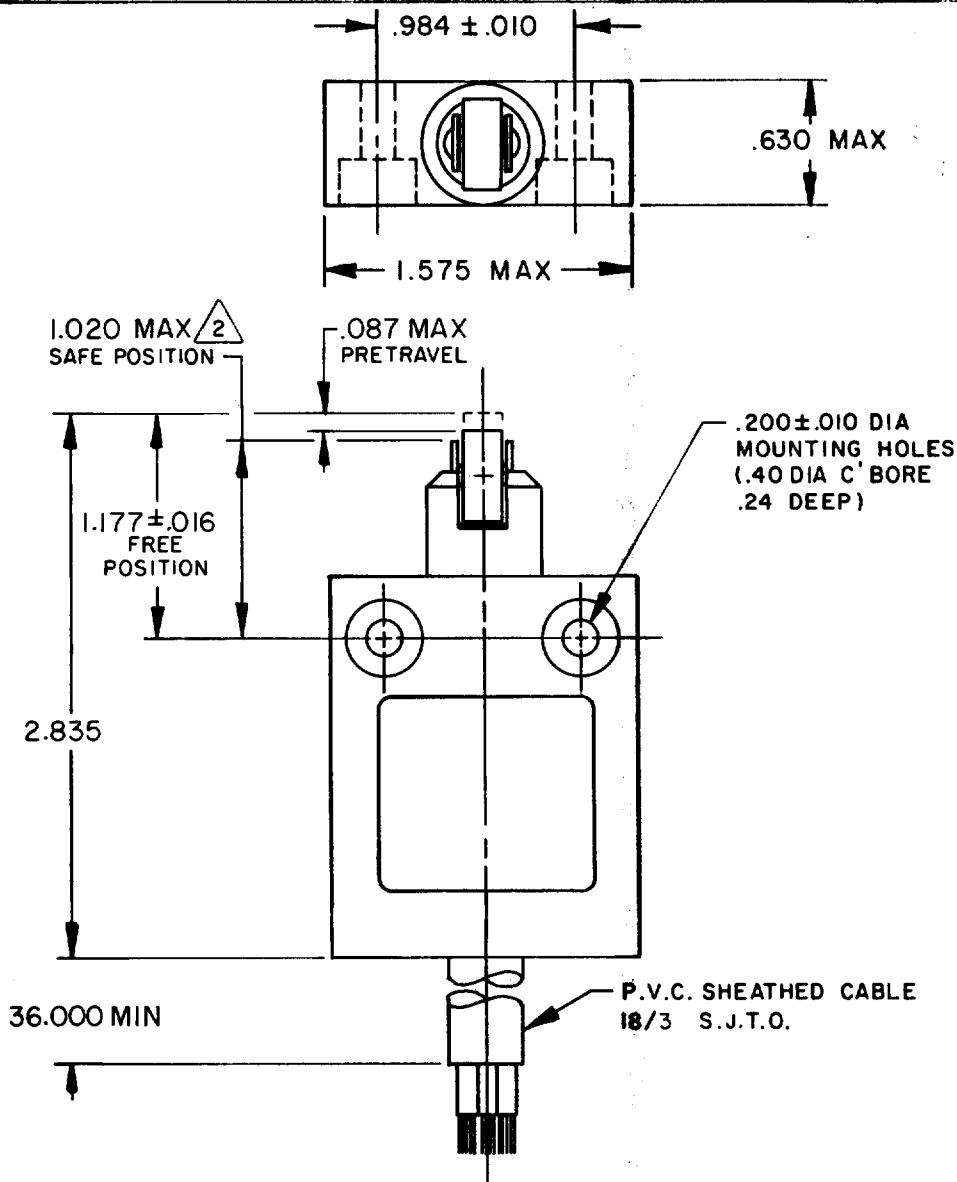

NOTES

- 1 - ZINC HOUSING FINISHED WITH GRAY PAINT
- 2 - THE MINIMUM PLUNGER TRAVEL PAST BREAK, FOR A SAFE CONTACT GAP IS $.060$



CIRCUIT DIAGRAM

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

CHARACTERISTICS

OPERATING FORCE----- 5.1 LB MAX

ELECTRICAL DATA

CONTACT ARRANGEMENT
 S P S T D B

10A-250 VAC
 1/3 HP-125 OR 250 VAC



SCALE FULL

DO NOT SCALE PRINT

TOLERANCES

APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE $\pm$

	DIM. IN	TOL. mm/in	DIM. IN	TOL. mm/in
NO PLACES	X	1/.04	X	0.07/05
ONE PLACE	X,X	0.4/.016	X,X	0.38/.016
TWO PLACES	X,X,X	0.15/.008	X,X,X	0.15/.008
THREE PLACES				
ANGLES				

DESIGN UNITS ☐ SI METRIC

☒ US CUSTOMARY

WEIGHT

FO-52848-A

DRAWN

TSK