



HONEYWELL PART NUMBER
93SX39-T
PRODUCT CODE VDQ9300
MILITARY PART NUMBER M8805/109-03

REV	DOCUMENT	CHANGED BY		CHECK
5	0086675	SBH	15FEB12	CMH

B

A

A

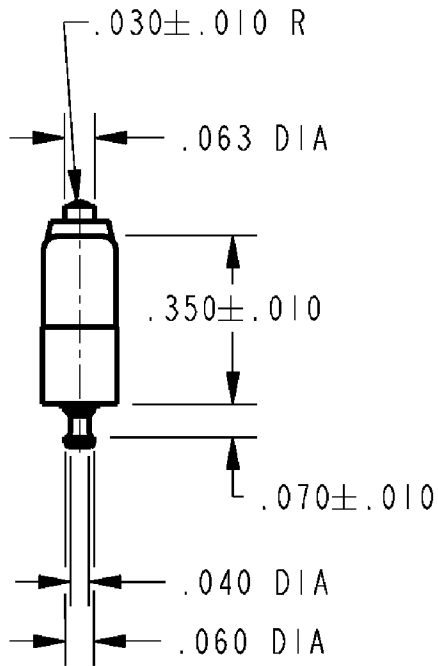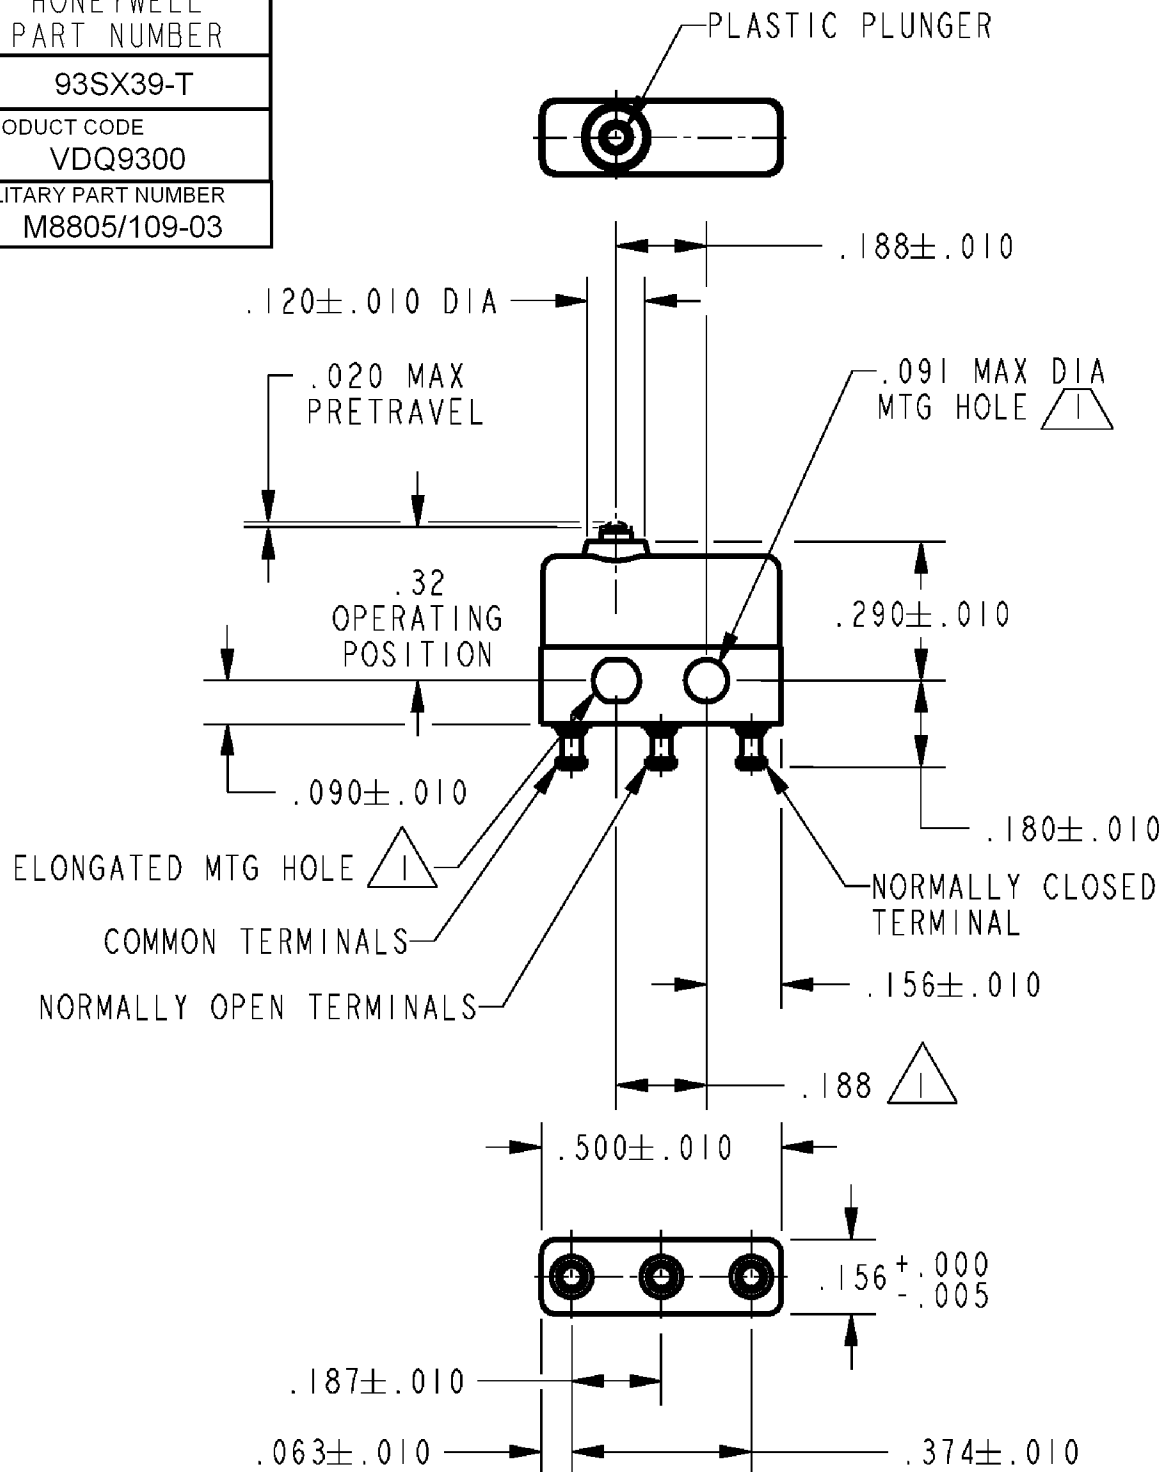

- NOTES
- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 DIA ON .188±.002 CENTERS
 - 2 - TERMINALS ARE PLATED FOR SOLDERING
 - 3 - MOVABLE CONTACT MATERIAL - GOLD PLATED, GOLD ALLOY
 - 4 - STATIONARY CONTACT MATERIAL - GOLD ALLOY

RELEASE NO.	PR-16148
REPLACES	

CHARACTERISTICS		ELECTRICAL DATA			DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± ONE PLACE .X ± TWO PLACE .XX ± THREE PLACE .XXX ± FOUR PLACE .XXXX ± ANGLES ± THIRD ANGLE PROJECTION 			DRAWN	SPK	03MAR08	Honeywell			
OPERATING FORCE ----- 5 OZ MAX		CONTACT ARRANGEMENT SPDT						CHECK	RJ	03MAR08				
RELEASE FORCE----- 1 OZ MIN		28 VOLTS DC RATING			INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY			TITLE SWITCH - BASIC						
DIFFERENTIAL TRAVEL--- .005 MAX		INDUCTIVE										SIZE B		
OVERTRAVEL----- .004 MIN		RESISTIVE						TYPE I						
					DRAWING NAME 93SX39-T									
									REV 5					
					SCALE NONE									
									WEIGHT:.003 LB MAX					
					SHEET 1 OF 1									