

HONEYWELL PART NUMBER
93SX47
PRODUCT CODE VDQ9327

REV	DOCUMENT	CHANGED BY	CHECK
5	0089212	NMN 09MAY12	CMH



B

A

A

B

A

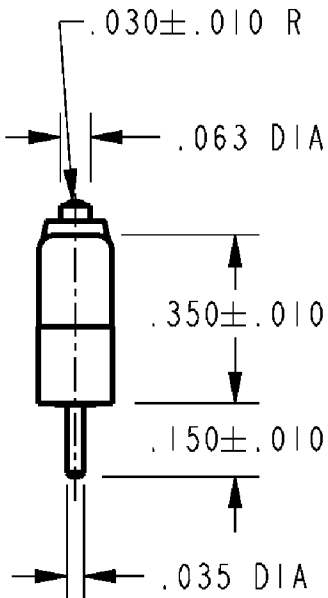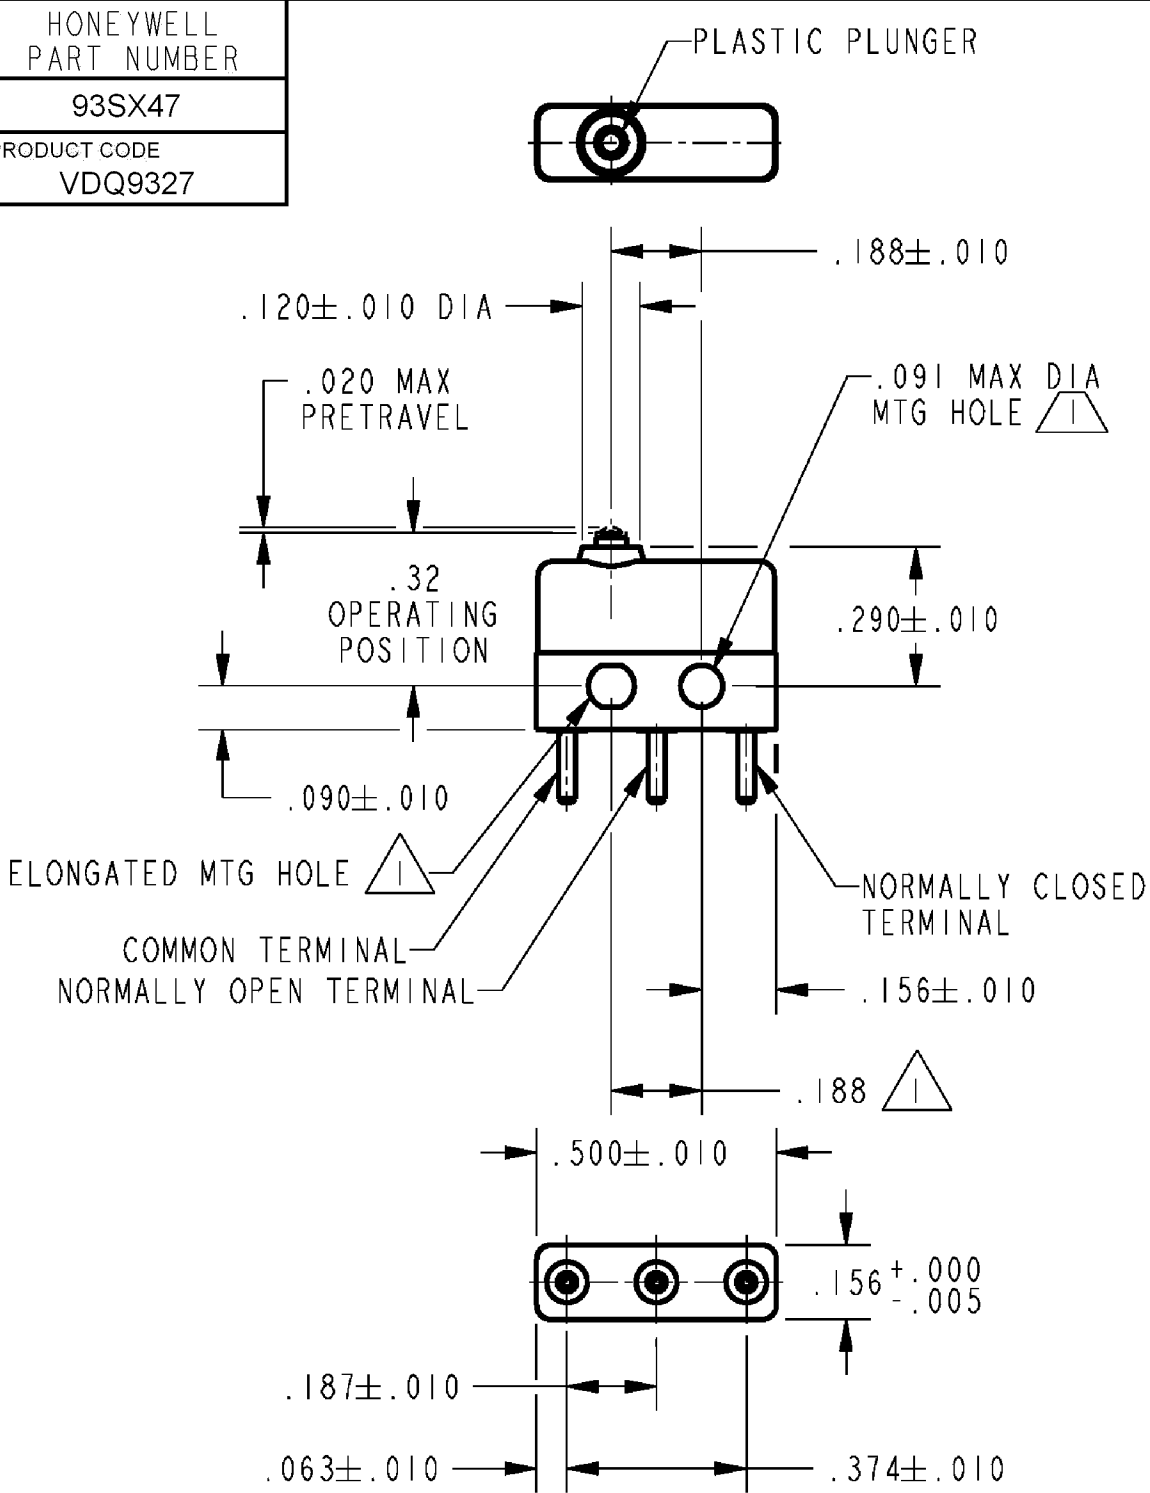

- NOTES
- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .188±.002 CENTERS
 - 2 - TERMINALS ARE PLATED FOR SOLDERING
 - 3 - MOVABLE CONTACT MATERIAL - GOLD PLATED GOLD ALLOY.
 - 4 - STATINARY CONTACT MATERIAL - GOLD ALLOY

RELEASE NO.	PR-18803
REPLACES	

CHARACTERISTICS		ELECTRICAL DATA				DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± ONE PLACE .X ± TWO PLACE .XX ± THREE PLACE .XXX ± FOUR PLACE .XXXX ± ANGLES ± THIRD ANGLE PROJECTION 				DRAWN	SPK	03MAR08	Honeywell			
OPERATING FORCE ----- 5 OZ MAX		CONTACT ARRANGEMENT SPDT								CHECK	RJ	03MAR08				
RELEASE FORCE----- 1 OZ MIN		28 VOLTS DC RATING				THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.				SIZE B TYPE I DRAWING NAME 93SX47 REV 5						
DIFFERENTIAL TRAVEL--- .005 MAX				SEA LEVEL	50,000 FT									INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		
OVERTRAVEL----- .004 MIN		INDUCTIVE		1/2 AMP	1/2 AMP	RASTER										
		RESISTIVE		1 AMP	1 AMP											
APPROVALS																