

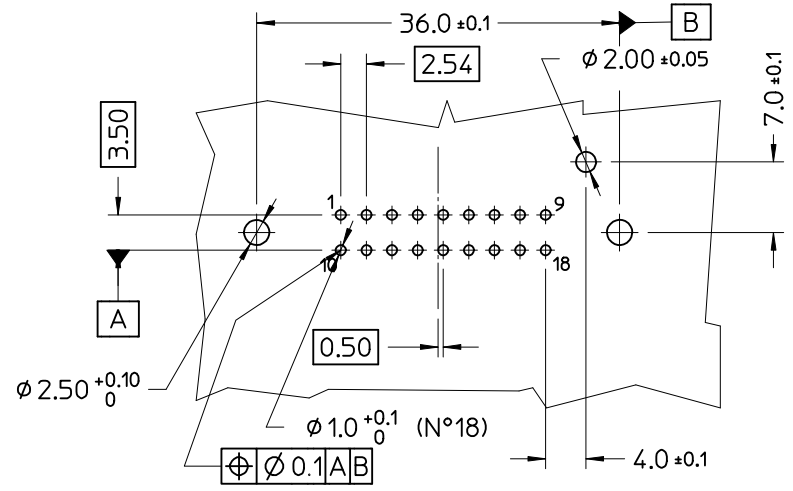
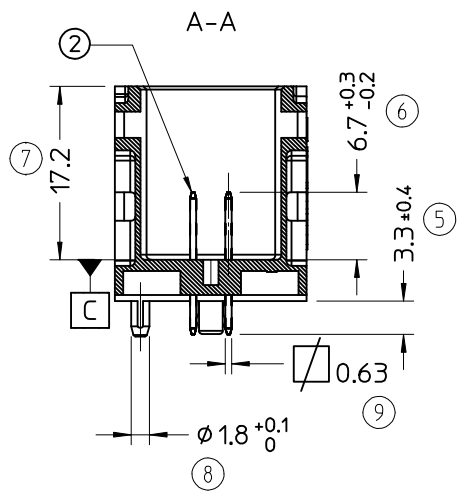
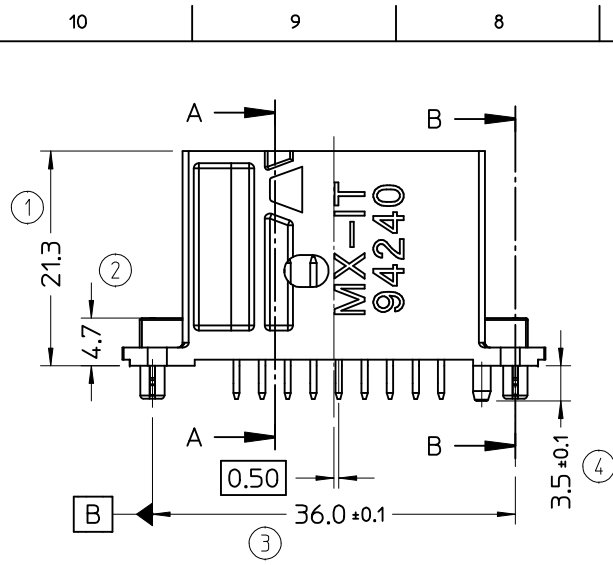


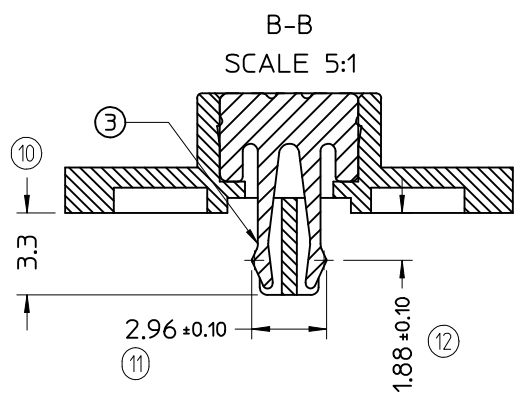


RECOMMENDED PCB LAYOUT (COMPONENT SIDE)
PCB THICKNESS 1.6 +/-0.15mm

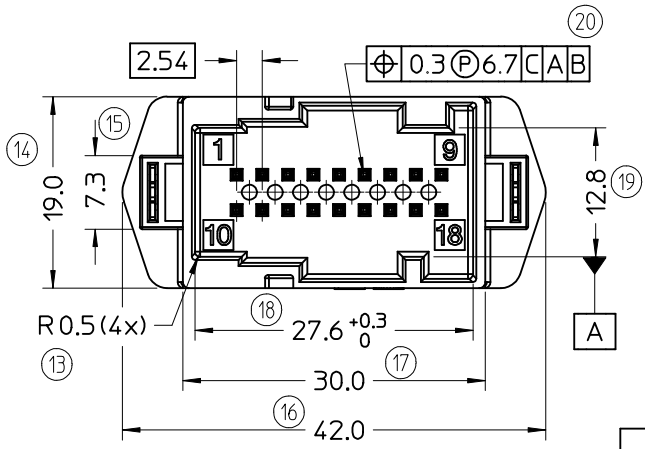

- A) MATERIALS:
- 1) HOUSING: SEE TABLE
 - 2) CONTACTS: BRASS, TIN OVER NICKEL PLATED
 - 3) BOARD LOCKS: COPPER ALLOY
- B) NOTES:
- RET. FORCE OF BOARD LOCK SYSTEM ON PCB: 15 N MIN.
 - REF. DOCUMENT: PS-94240-001

P/N	PACKAGING	MATERIAL	S.P.Q.
94240-2818	IN TRAYS	PCT 20% FV GREY	15120
94240-3818	IN CARTON BOXES	PBT 20% FV GREY	

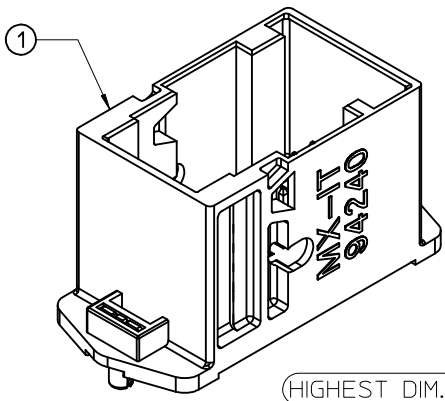

HIGHEST DIM. CONTROL No.: 20

Std.Descr.: "HEADER GREY THRU HOLE W/PEGS 18 CKT"

EC NO: Z2009-0059 DRWN: SBARBER 2009/04/21 CHKD: LSANTISS 2009/04/21 APPR: FBISSELLO 2009/04/28		DESCRIPTION REV	QUALITY SYMBOLS ▽ - 0 ▽ - 0	GENERAL TOLERANCES (UNLESS SPECIFIED)		SCALE 2:1	DESIGN UNITS METRIC	 FIRST ANGLE PROJECTION	REVISE ON CAD ONLY	
				mm	INCH	DIMENSION STYLE MM ONLY		TITLE 18 CKT GREY HEADER WITH BOARD LOCKS		
4 PLACES ± ---				± ---	DRAWN BY DATE FGOTTARD 2002/05/10					
3 PLACES ± ---				± ---	CHECKED BY DATE MTESTAGU 2002/05/10		MOLEX INCORPORATED			
2 PLACES ± 0.3				± ---	APPROVED BY DATE GZUIN 2002/05/10					
1 PLACE ± 0.3				± ---	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		SHEET NO. 1 OF 1			
ANGULAR ± 2 °										
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS										