
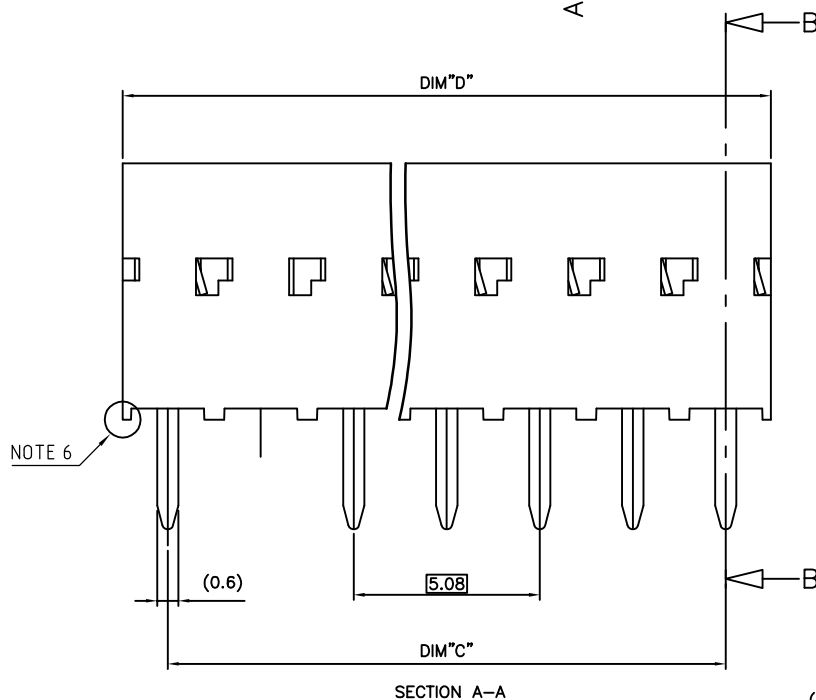


PRODUCT NB	DIM"C" & DIM"D"
95264-YXX(H)(LF)	SEE SHEET 2/2


WHEN NEEDED, SUFFIX LETTER "LF"
INDICATES THE PRODUCT IS RoHS
COMPATIBLE, SEE NOTE 5

EXAMPLE MISSING TERMINAL

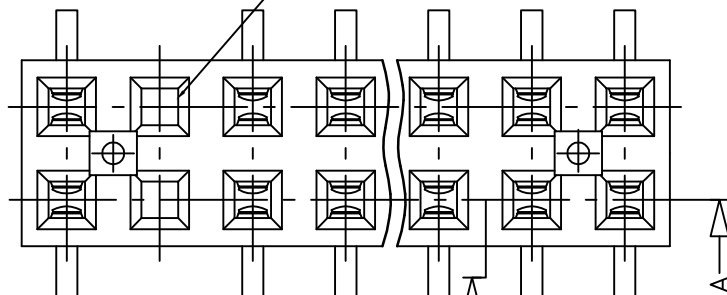

SECTION A-A

(SEE NOTE 4)

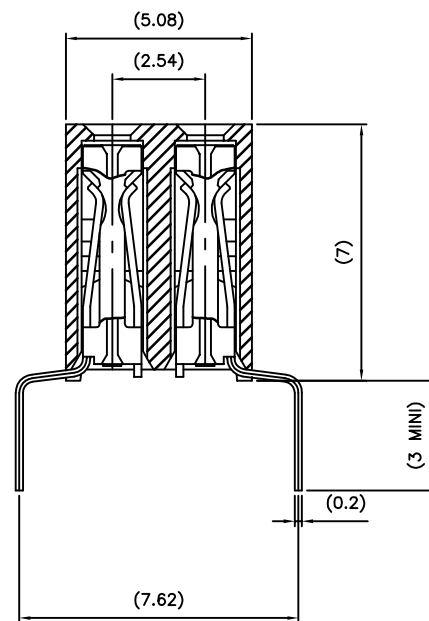



SECTION B-B

NOTES:

- 1 - MATERIAL HOUSING: THERMOPLASTIC POLYESTER, 30% GLASS FILLED, COLOUR BLUE. FLAME RETARDANT PER UL-94 CATEGORY V0.
- 2 - MATERIAL TERMINAL: PHOSPHOR BRONZE EXTRA HARD.
- 3 - MATERIAL HOUSING VERSION HIGH TEMPERATURE: PCT 30% GLASS FILLED, COLOUR GREY. FLAME RETARDANT PER UL-94 CATEGORY V0.
- 4 - THE DASH "H" AT THE END OF THE P/N TO INDICATE A HIGH TEMPERATURE HOUSING.
- 5 - RoHS COMPATIBLE PRODUCT SPECIFICATIONS
 - a - PLATING:
 - "LF" MEANS THE PRODUCT IS LEAD-FREE, 2µm MINIMUM MATTE TIN OVER 1.27µm MINIMUM NICKEL UNDERPLATE.
 - b - MANUFACTURING PROCESS COMPATIBILITY
 - THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C ±5°C SOLDER BATH TEMPERATURE FOR 5 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.6mm MIN THICK CIRCUIT BOARD.
 - c - LABELING:
 - MEETS PACKAGING SPECS AS PER GS-14-920
 - d - LEGAL STATEMENT: SEE GS-22-008
- 6 - END STAND-OFFS FOR 2x2 UP TO 2x5 POS
NO END STAND-OFFS FOR 2x6 UP TO 2x50 POS

mat'l. code SEE NOTES				surface ISO 1902	tolerance ISO 406 ISO 1001	projection ISO 1001	product family DX VCC DR
H	F80638	VMO	98.10.14	tolerances unless otherwise specified	±0.3	mm	title SPREADED LEGS .300 SELECT. LOADED
J	F20161	DLE	02.02.25	angles	linear	scale 10:1	dwg no 95264
K	F04-0347	DLE	04.11.15	±2°			sheet 1 of 2 size A2
L	F06-0137	DLE	06.02.27	dr	O. MATHEVON	96.06.07	type CUSTOMER Drawing
M	F06-0204	DLE	06.06.28	engr	JM.PHAMVAN	96.06.07	
N	F06-0323	DLE	06.11.21	chr	P.NIZZI	96.06.07	
P	F11-0043	JCO	11.02.22	app	JM.P	96.06.07	
sheet index	revision sheet	P 1	H 2				

PRODUCT N°	NB of POS.	DIM"C"	DIM"D"	CONTACT PLACED IN CAVITY (SEE VIEW "A")															
				1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
95264-Y01(H)(LF)	2x10	22.86	25.32	X	X		X	X	X	X	X	X	X						
95264-Y02(H)(LF)	2x15	35.56	38.02	X	X		X	X	X	X	X	X		X	X	X	X	X	
95264-Y03(H)(LF)	2x11	35.56	38.02	X	X	X	X	X	X	X			X	X					
95264-Y04(H)(LF)	2x10	22.86	25.32	X	X	X	X	X	X	X	X	X							
95264-Y05(H)(LF)	2x4	7.62	10.08	X	X	X													
95264-Y06(H)(LF)	2x5	10.16	12.62	X	X		X	X											
95264-Y07(H)(LF)	2x3	5.08	7.54	X	X														
95264-Y08(H)(LF)	2x7	15.24	17.7	X	X		X		X										
95264-Y09(H)(LF)	2x14	33.02	35.48	X	X	X	X	X	X	X	X					X	X		
95264-Y10(H)(LF)	2x20	48.26	50.72	X		X		X		X		X		X		X		X	

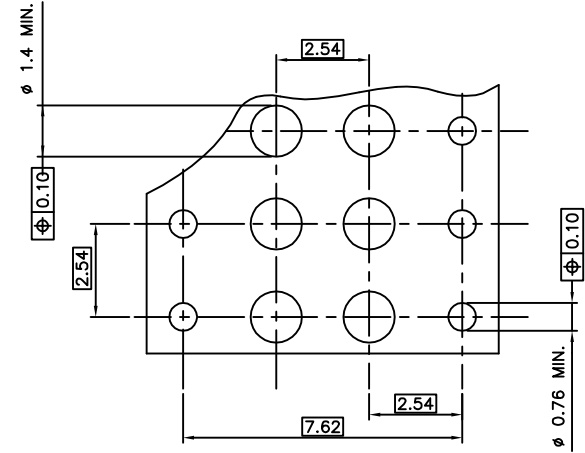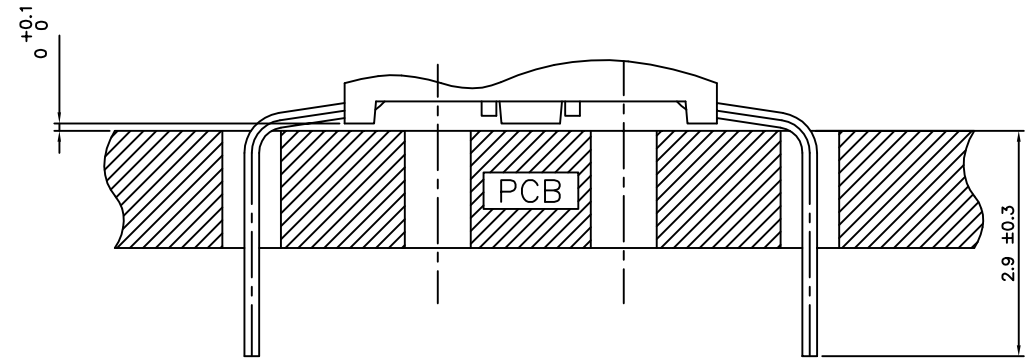

95264-6XX(H)	2µm Au MIN. OVER 1.3µm Ni MIN.	SnPb OVER Ni
95264-8XX(H)	0.4µm Au MIN. OVER 1.3µm Ni MIN.	SnPb OVER Ni
95264-4XX(H)	5µm SnPb MIN. OVER 0.1µm Ni MIN.	SnPb OVER Ni
95264-3XX(H)	0.75µm Au MIN. OVER 1.3µm Ni MIN.	SnPb OVER Ni
PLATING CODE	CONTACT AREA	SOLDER TAIL
PLATING EXPLANATION		

95264-6XX(H)LF	2µm Au MIN. OVER 1.3µm Ni MIN.	Sn OVER Ni
95264-8XX(H)LF	0.4µm Au MIN. OVER 1.3µm Ni MIN.	Sn OVER Ni
95264-4XX(H)LF	5µm Sn MIN. OVER 1.27µm Ni MIN.	Sn OVER Ni
95264-3XX(H)LF	0.75µm Au MIN. OVER 1.3µm Ni MIN.	Sn OVER Ni
PLATING CODE	CONTACT AREA	SOLDER TAIL
PLATING EXPLANATION		

CUSTOMER COPY FOR REFERENCE ONLY

mat'l. code	SEE NOTES	surface	ISO 1302	tolerance	ISO 406	ISO 101	projection	product family	DX VCC DR
lfr	ecn no	dr	date	tolerances unless otherwise specified	mm	mm	mm	FILE	SPREADER LEGS
H	F06-020	DLE	06.06.28	angles	linear	±0.3	mm	scale 10:1	.300 SELECT. LOADED
C	F70103	JMC	97.01.10	±2°					
D	F70629	PNZ	97.09.25	dr	P.NIZZI	96.10.23			
E	F80638	VMO	98.10.14	engr	JM.PHAMVAN	96.10.23			
F	F20161	DLE	02.02.25	chr	P.NIZZI	96.10.23			
G	F04-0347	DLE	04.11.15	app	JM.P	96.10.23			
sheet index	revision	sheet							

FCI

dwg no 95264 sheet 2 of 2 size A2

type CUSTOMER Drawing