

A

B

C


D

E

F

G

H

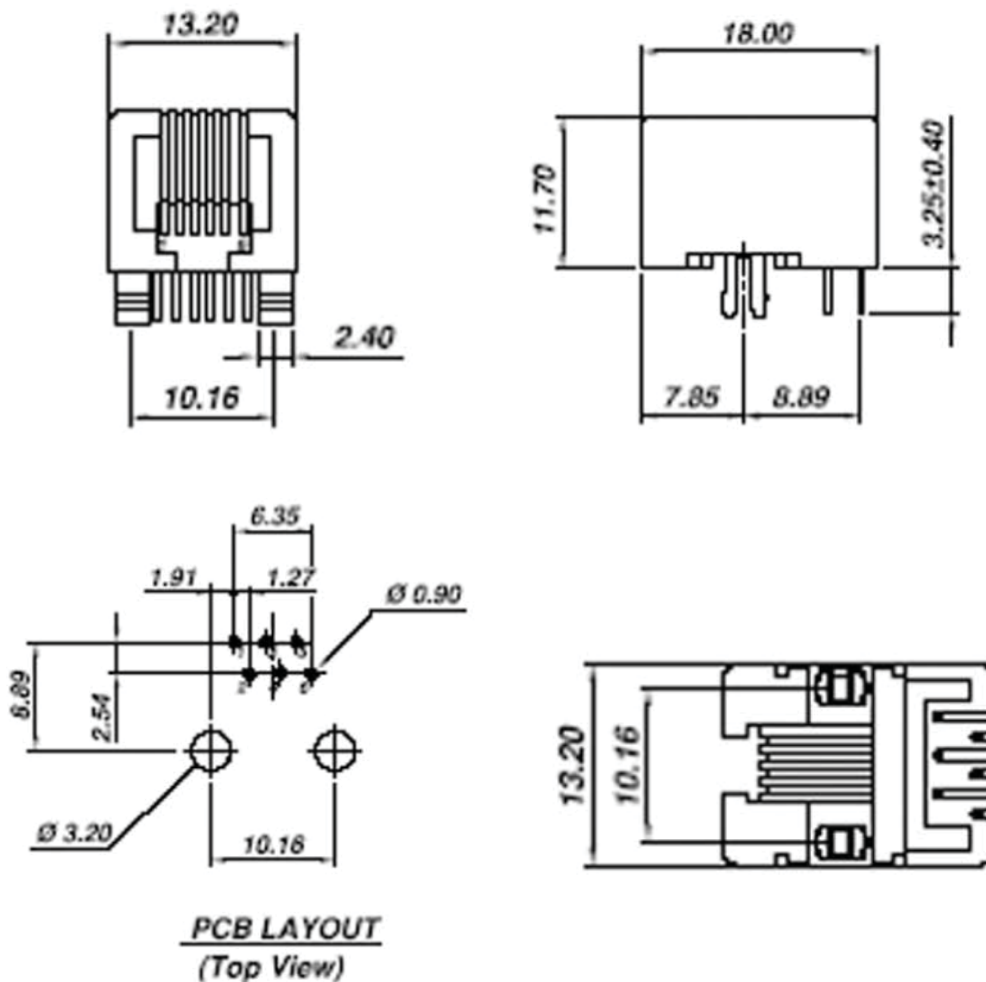

Materials:

- Insulator: P.B.T. Glass Filled, UL94V-0
 - Soldering Temperature: 235°C
- Spring Wire: 0.45MM Dia. Phosphor Bronze
 - Gold Plating over Nickel
- Color: Black

Electrical:

- Insulation Resistance: 500MΩ Min.
- Contact Resistance: 20MΩ Max.
- Rating Current: 1.5A Max.
- Rating Voltage: 120V AC
- Dielectric Withstanding: 1,000V AC at 1 Minute
- Operating Temperature: -40°C ~ +85°C
- Durability: 500 Mating cycles Min.

PCB LAYOUT
(Top View)

Scale	1:1							Name
TOLERANCE						Drawn	12.20.11	Chappell
X.X	±0.40					Approved		
X.XX	±0.25							
X.XXX	±0.15							
Angle	±3°							
			Modification	Date	Name			

Item No.	Item Description	Unit	Quantity	Rate	Amount
----------	------------------	------	----------	------	--------

A-2004-1-4-LP-N-R

	Title
--	-------

Modular Jack, Low Profile, 6P6C, 90°,
Side Entry, 6μ", Black, PBT Glass Filled

Drawing No.

rev00

Replace

	Sheet
--	-------

