

Materials:



- Insulator: P.B.T. Glass Filled, UL94V-0
 - Soldering Temperature: 235°C

- Spring Wire: 0.45MM Dia. Phosphor Bronze Gold Plating over Nickel

- Color: Black

Electrical:

- Insulation Resistance: 500MΩ Min.
- Contact Resistance: 20MΩ Max.
- Rating Current: 1.5A Max.
- Rating Voltage: 120V AC
- Dielectric Withstanding: 1,000V AC at 1 Minute
- Operating Temperature: -40°C ~ +85°C
- Durability: 500 Mating cycles Min.

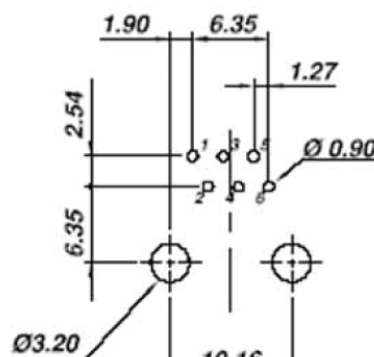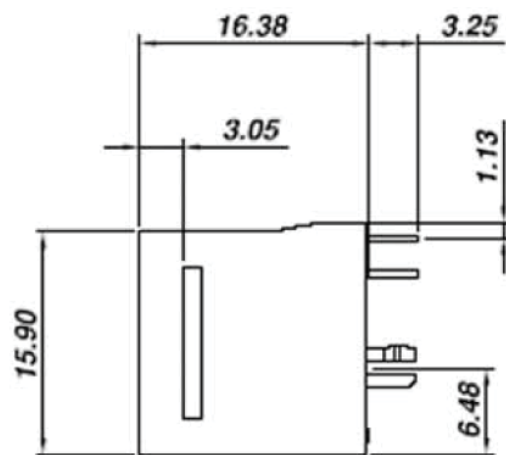

PCB LAYOUT
(Top View)

[illegible]

RoHS Complaint

Item No.	Item Description	Unit	Quantity	Rate	Amount
----------	------------------	------	----------	------	--------

A-2014-1-3-R

Title	PCB Jack, 6P6C, 180°, Top Entry, 50μ", with Flange, Black
--------------	--

Drawing No.

rev00

Replace

Sheet