
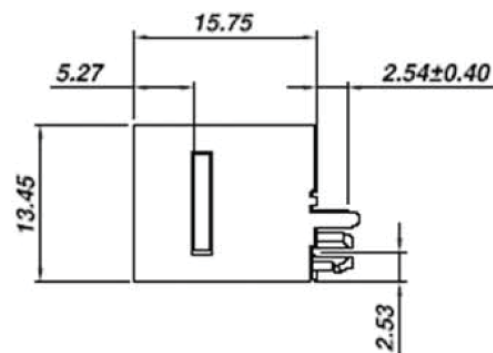


A

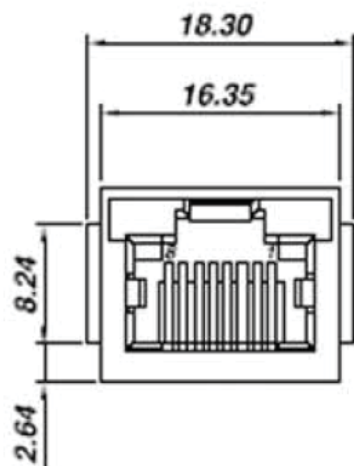


Materials:

- Insulator: Nylon, UL94V-0
 - Soldering Temperature: 260°C
- Spring Wire: 0.35MM Thickness Phosphor Bronze Gold Plating over Nickel
- Color: Black
- Shielded: Brass Plating Nickel

Electrical:

- Insulation Resistance: 500MΩ Min.
- Contact Resistance: 20MΩ Max.
- Rating Current: 1.5A Max.
- Rating Voltage: 120V AC
- Dielectric Withstanding: 1,000V AC at 1 Minute
- Operating Temperature: -40°C ~ +85°C
- Durability: 500 Mating cycles Min.

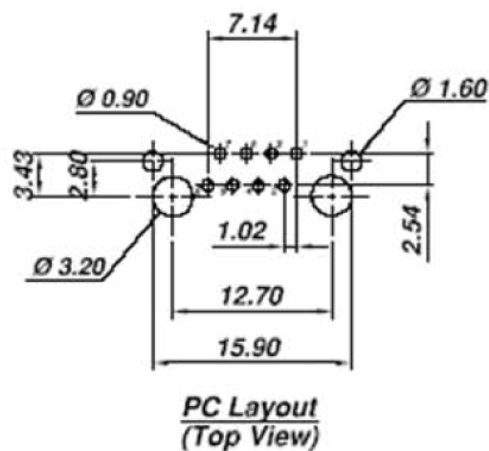

B

C

D

E

F

G

H

RoHS Complaint

Scale	1:1							Name
TOLERANCE						Drawn	12.22.11	Chappel
X.X	±0.40					Approved		
X.XX	±0.25							
X.XXX	±0.15							
Angle	±3°							
			Modification	Date	Name			

Item No.	Item Description	Unit	Quantity	Unit Price	Total Price
----------	------------------	------	----------	------------	-------------

A-2014-2-3-LP/FS-R

Title	RJ45, Top Entry, 180°, Shielded, 50μ", Flat Pin, Black
--------------	---

Drawing No.

rev00

Replace

Sheet
