



A



SHIELDED

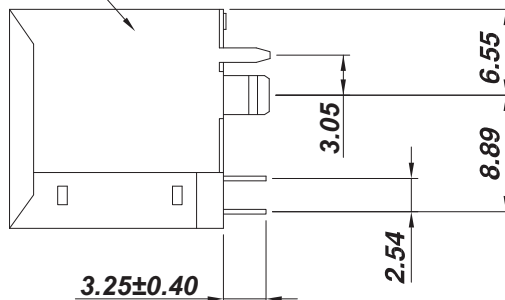



A

B

B

C

C

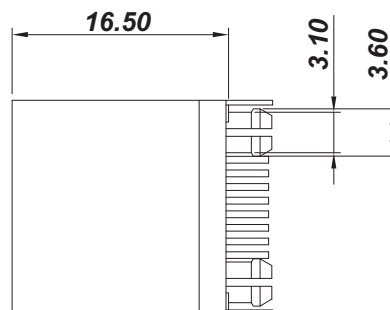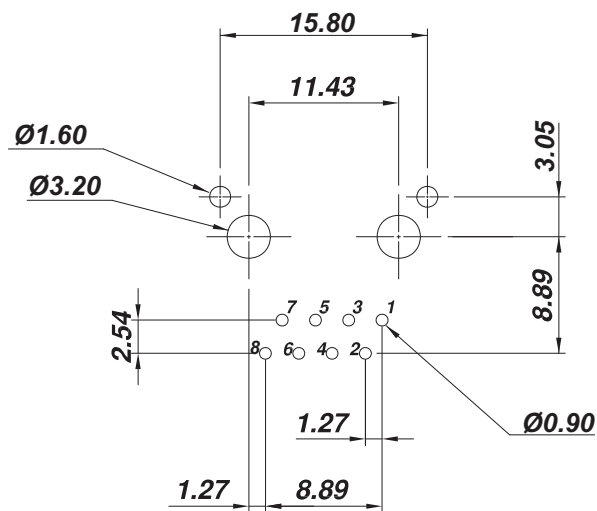

Material:

- Housing: PBT Glass Filled (UL 94V-0)
- Soldering Temperature: 235°C
- Color: Black
- Spring Wire: 0.35MM Dia. Phosphor Bronze Gold Plating over Nickel
- Shielded: Brass Plating Nickel
- Temperature Range: -40°C ~ +85°C
- Durability: 500 Mating cycles Min.

Electrical:

- Insulation Resistance: 500MΩ Min.
- Contact Resistance: 20MΩ Max.
- Rating Current: 1.5A Max.
- Rating Voltage: 120V AC
- Dielectric Voltage: 1,000V RMS 60 Sec. Min.

E

E

F

F

PCB Layout (Top View)

Scale	1:1							Name
TOLERANCE						Drawn	12.22.11	Chappell
X.X	±0.40					Approved		
X.XX	±0.25							
X.XXX	±0.15							
Angle	±3°							
								
			Modification	Date	Name			

Item No.	
A-2014-2S-1-N-R	
Title	
Modular Jack, RJ45 Top Entry, PCB, Shielded, 180°, 15μ"	
Drawing No.	rev00
Replace	Sheet

