



A



SHIELDED

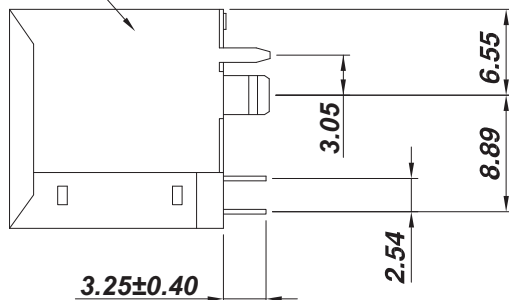



A

B

B

C

C

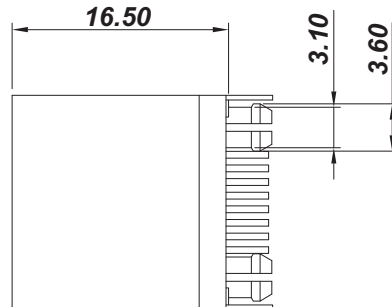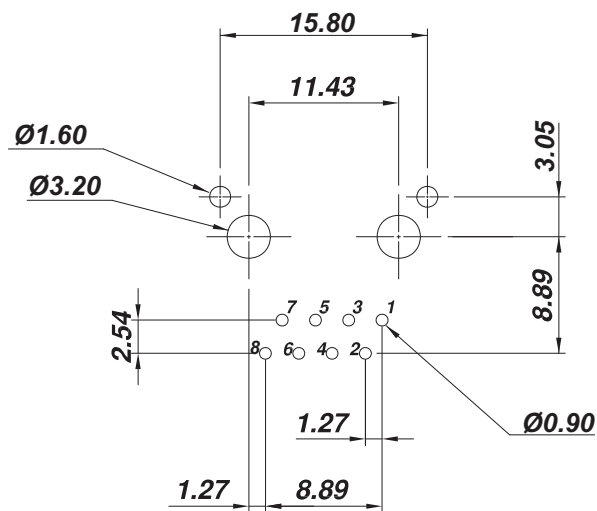

Material:

- Housing: PBT Glass Filled (UL 94V-0)
- Soldering Temperature: 235°C
- Color: Black
- Spring Wire: 0.35MM Dia. Phosphor Bronze Gold Plating over Nickel
- Shielded: Brass Plating Nickel
- Temperature Range: -40°C ~ +85°C
- Durability: 500 Mating cycles Min.

Electrical:

- Insulation Resistance: 500MΩ Min.
- Contact Resistance: 20MΩ Max.
- Rating Current: 1.5A Max.
- Rating Voltage: 120V AC
- Dielectric Voltage: 1,000V RMS 60 Sec. Min.

E

E

F

F

PCB Layout (Top View)

Scale	1:1							Name
TOLERANCE						Drawn	12.22.11	Chappell
X.X	±0.40					Approved		
X.XX	±0.25							
X.XXX	±0.15							
Angle	±3°							
			Modification	Date	Name			



Item No.	Item Description	Unit	Quantity	Rate	Amount
----------	------------------	------	----------	------	--------

A-2014-2S-3-N-R

	Title
--	-------

Modular Jack, RJ45 Top Entry,
PCB, Shielded, 180°, 50μ"

Drawing No.

rev00

Replace

Sheet

ASSMANN
VVS components