


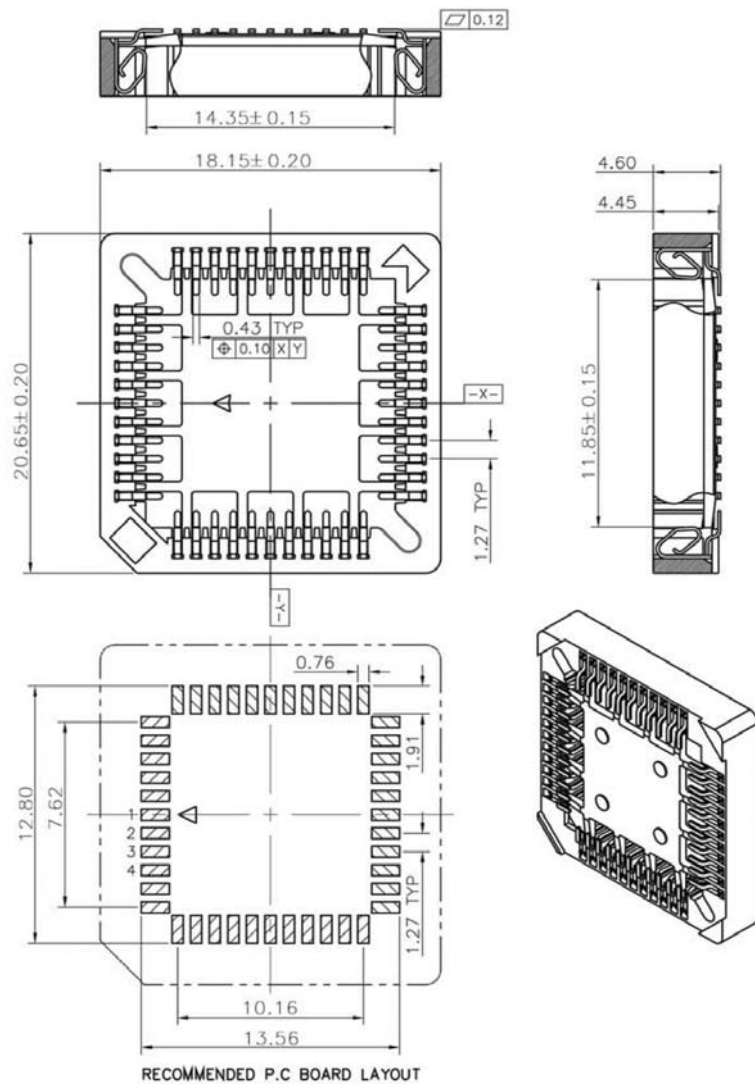

Materials:

- Insulator: PPS + 30%GF UL 94V-0
- Color: PBT Beige
- Contacts: Phosphor Bronze
- Terminal Thick: 0.17/0.20/0.25
- Contact Plating: Tin

Electrical:

- Rating Current: 1 Amp
- Rating Voltage: 250V AC/DC Max.
- Dielectric Withstanding: 500V AC at 1 Minute
- Contact Resistance: 30MΩ Max.
- Insulation Resistance: 1,000MΩ Min.
- Operating Temperature: -55°C ~ +105°C
- Retention Force: 0.30Kg per pin (Min.)

Scale	1:1							Name
TOLERANCE						Drawn	11.08.11	Chappell
X.X	±0.40					Approved		
X.XX	±0.25							
X.XXX	±0.15							
Angle	±3°							
			Modification	Date	Name			

RoHS Complaint

ASSMANN
WVSW components

Item No.	Item Description	Unit	Quantity	Rate	Amount
----------	------------------	------	----------	------	--------

A-CCS32-Z-SM-R

Title	PLCC Socket 32 pin, Tin, SMT
--------------	------------------------------

Drawing No.

rev00

Replace

Sheet
