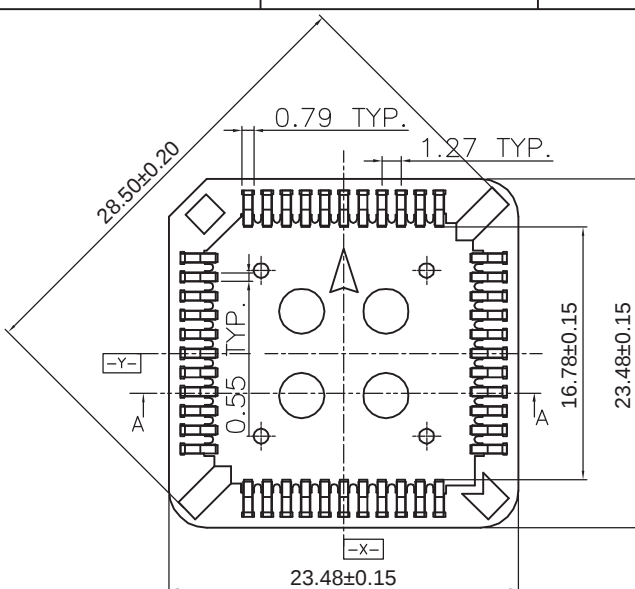
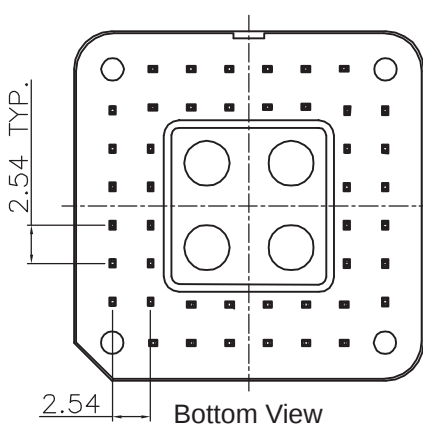
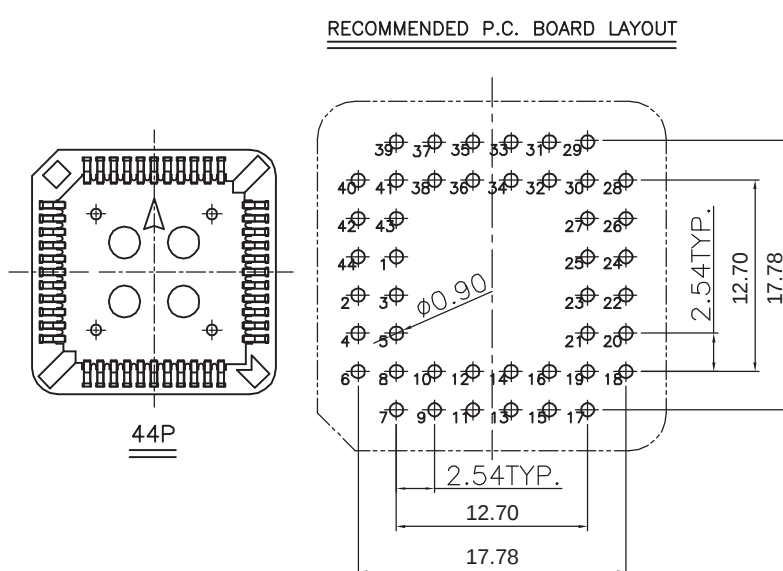
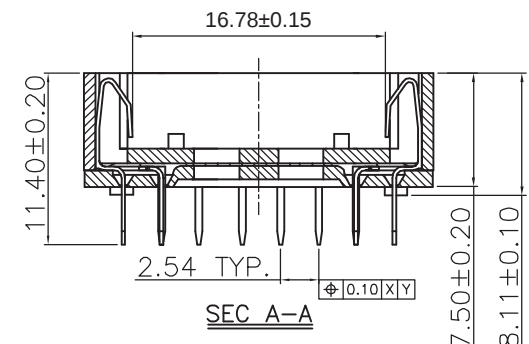


	1	2	3	4	5	6	7																																																																														
A								A																																																																													
B								B																																																																													
C								C																																																																													
D								D																																																																													
E								E																																																																													
F	Material: - Body: PBT + 30%GF UL 94V-0 - Cover: PBT + 30%GF UL 94V-0 - Contacts: Phosphor Bronze - Contact plating: Gold - Terminal Thickness: 0.25 Electrical: - Current rating: 1.0A - Voltage rating: 250V AC/DC Max. - Dielectric withstanding: 500V AC for one minute - Contact resistance: 30mΩ Max. - Insulation resistance: 1,000MΩ Min. - Retention force: 0.30Kg per pin (Min.) - Operating temperature: -55°C~+105°C							F																																																																													
G	Unit: mm RoHS Compliant <table><tr><td>Scale</td><td>Free</td><td></td><td></td><td></td><td></td><td>Date</td><td>Name</td><td colspan="2">Title PLCC Socket DIP 44pin w/polarizing peg, 2.54mm pitch</td></tr><tr><td colspan="2">TOLERANCE</td><td></td><td></td><td></td><td></td><td>Drawn</td><td>14.01.13</td><td>Wilson</td><td rowspan="2">ASSMANN WSW-No. A-CCS44-G-R</td></tr><tr><td>X.X</td><td>±0.30</td><td></td><td></td><td></td><td></td><td rowspan="2">Approved</td><td rowspan="2">14.01.13</td><td rowspan="2">Groll</td></tr><tr><td>X.XX</td><td>±0.15</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>Drawing-No.</td></tr><tr><td>X.XXX</td><td>±0.10</td><td></td><td></td><td></td><td></td><td colspan="3" rowspan="2"></td><td rowspan="2">rev00</td></tr><tr><td>DIM</td><td>TOL</td><td></td><td></td><td></td><td></td></tr><tr><td>X.X°</td><td>±3°</td><td rowspan="3">Ⓢ</td><td></td><td></td><td></td><td colspan="3" rowspan="3">1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283 Toll Free: 1-877-277-6266 • Email: info@assmann.us</td></tr><tr><td>X.XX°</td><td>±1°</td></tr><tr><td>X.XXX°</td><td>±0.5°</td></tr><tr><td></td><td></td><td>Id.</td><td>Modification</td><td>Date</td><td>Name</td><td colspan="2">Replace</td><td>Sheet 1/1</td></tr></table>							Scale	Free					Date	Name	Title PLCC Socket DIP 44pin w/polarizing peg, 2.54mm pitch		TOLERANCE						Drawn	14.01.13	Wilson	ASSMANN WSW-No. A-CCS44-G-R	X.X	±0.30					Approved	14.01.13	Groll	X.XX	±0.15								Drawing-No.	X.XXX	±0.10								rev00	DIM	TOL					X.X°	±3°	Ⓢ				1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283 Toll Free: 1-877-277-6266 • Email: info@assmann.us			X.XX°	±1°	X.XXX°	±0.5°			Id.	Modification	Date	Name	Replace		Sheet 1/1	G
Scale	Free					Date	Name	Title PLCC Socket DIP 44pin w/polarizing peg, 2.54mm pitch																																																																													
TOLERANCE						Drawn	14.01.13	Wilson	ASSMANN WSW-No. A-CCS44-G-R																																																																												
X.X	±0.30					Approved	14.01.13	Groll																																																																													
X.XX	±0.15											Drawing-No.																																																																									
X.XXX	±0.10								rev00																																																																												
DIM	TOL																																																																																				
X.X°	±3°	Ⓢ				1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283 Toll Free: 1-877-277-6266 • Email: info@assmann.us																																																																															
X.XX°	±1°																																																																																				
X.XXX°	±0.5°																																																																																				
		Id.	Modification	Date	Name	Replace		Sheet 1/1																																																																													
H								H																																																																													
	1	2	3	4	5	6	7																																																																														