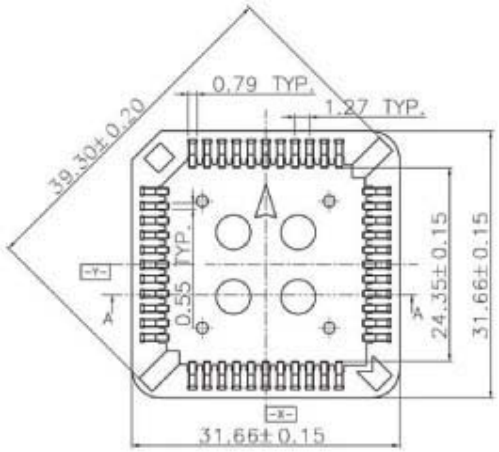

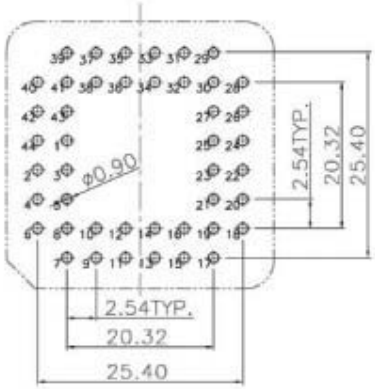

RECOMMENDED P.C. BOARD LAYOUT

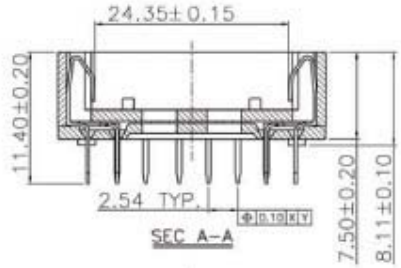

SEC A–A

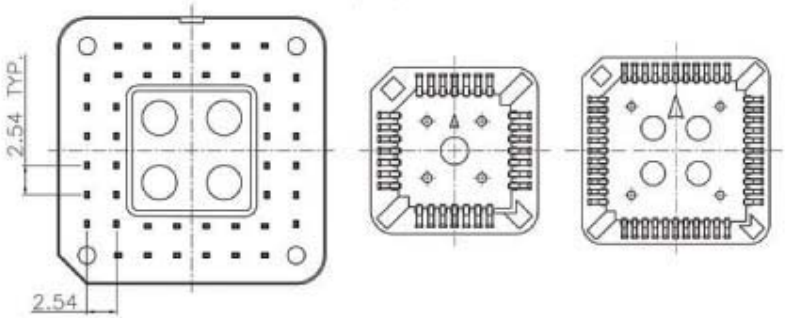

Materials:

- Body: PPS + 30%GF UL 94V-0
- Cover: PPS + 30%GF UL 94V-0
- Contacts: Phosphor Bronze
- Terminal Thick: 0.17/0.20/0.25
- Contact Plating: Tin

Electrical:

- Rating Current: 1 Amp
- Rating Voltage: 250V AC/DC Max.
- Dielectric Withstanding: 500V AC at 1 Minute
- Contact Resistance: 30MΩ Max.
- Insulation Resistance: 1,000MΩ Min.
- Operating Temperature: -55°C ~ +105°C
- Retention Force: 0.30Kg per pin (Min.)

RoHS Complaint

Scale	1:1							Name
TOLERANCE						Drawn	11.07.11	Chappell
X.X	±0.40					Approved		
X.XX	±0.25							
X.XXX	±0.15							
Angle	±3°							
			Modification	Date	Name			

ASSMANN WSW components

Item No. **ACCS68-Z-R**

Title PLCC Socket 68 Pin, Tin, 2.54MM pitch

Drawing No. **rev00**

Replace | Sheet