
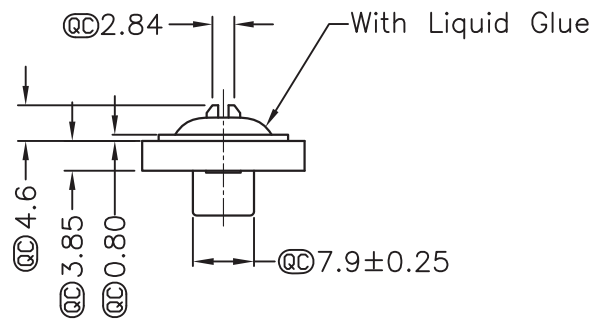
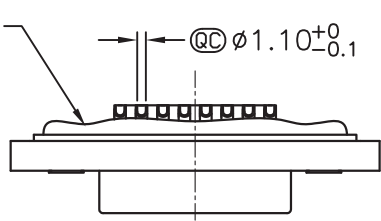
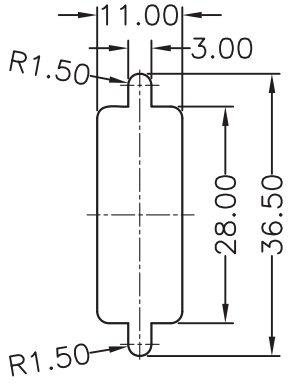
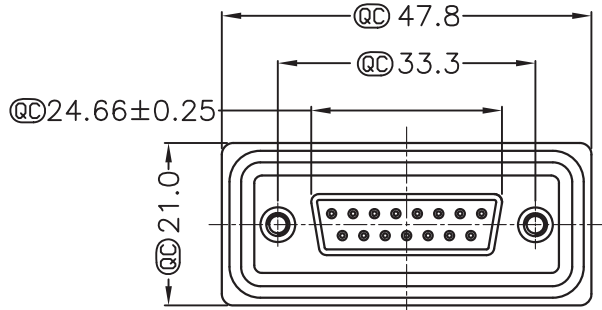
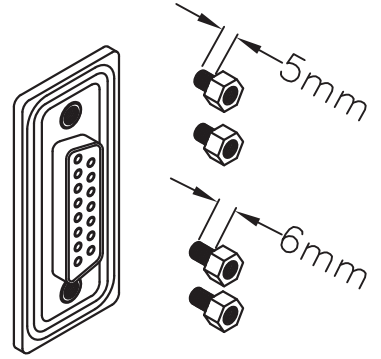



	1	2	3	4	5	6	7																																																																		
A	 Panel Thickness X(Max.)							A																																																																	
B	Screw L=5.0 For Panel Thickness Under 1.2mm							B																																																																	
C	Screw L=6.0 For Panel Thickness Between 1.2~2.0mm		QC = Important Dimension					C																																																																	
D						Material: - Waterproof Rate: IP67 - Connector: Black, Nylon + GF - Pin: Copper Alloy, Gold Plated - Applicable Wire Range: 22AWG - 26AWG - Insulators: PBT - Max Torque on hex stand off: 9.92LB Electrical: - Current Rating: 5A - Dielectric voltage: 500V AC / 1 Minute - Insulation resistance: >500MΩ Min. - Operating Temperature: -40°C to +105°C		D																																																																	
E	Recommended Panel Cut-Out							E																																																																	
F								F																																																																	
G			<table><tr><td>Scale</td><td>1:1</td><td></td><td></td><td></td><td></td><td></td><td>Name</td></tr><tr><td>TOLERANCE</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>X.X</td><td>±0.40</td><td></td><td></td><td></td><td>Drawn</td><td>11.22.11</td><td>Chappell</td></tr><tr><td>X.XX</td><td>±0.25</td><td></td><td></td><td></td><td>Approved</td><td></td><td></td></tr><tr><td>X.XXX</td><td>±0.15</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>Angle</td><td>±3°</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>				Scale	1:1						Name	TOLERANCE								X.X	±0.40				Drawn	11.22.11	Chappell	X.XX	±0.25				Approved			X.XXX	±0.15							Angle	±3°																							Item No. A-DF15LL-WP-R		G
Scale	1:1						Name																																																																		
TOLERANCE																																																																									
X.X	±0.40				Drawn	11.22.11	Chappell																																																																		
X.XX	±0.25				Approved																																																																				
X.XXX	±0.15																																																																								
Angle	±3°																																																																								
H							Title D-Sub Connector Waterproof, Solder Cup Version, Female, 15 Pin Drawing No. rev00		H																																																																
	1	2	3	4	5	6	7																																																																		