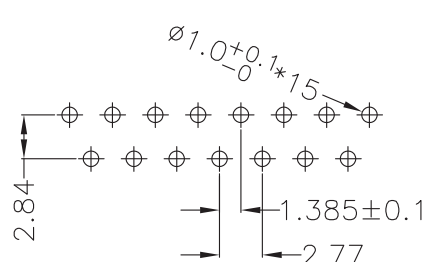
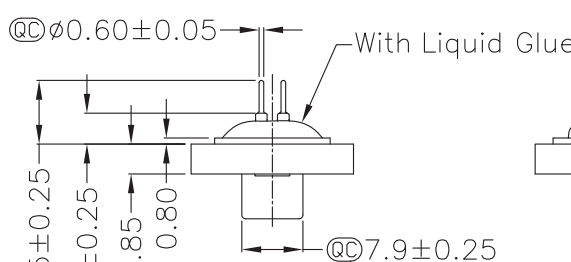
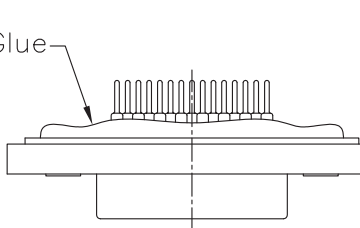
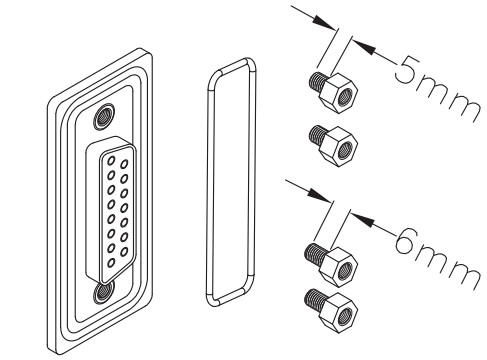
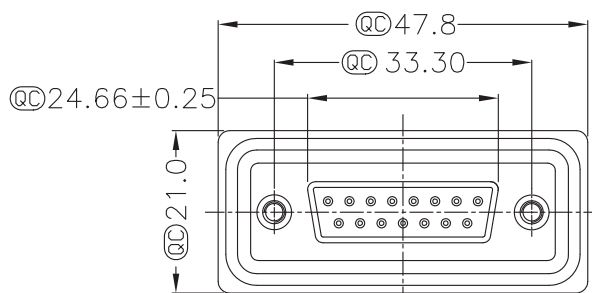
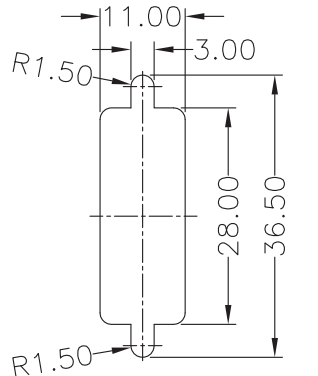



	1	2	3	4	5	6	7																																																																																								
A	 15 Pin Female Connector PCB Pin Layout Scale 2:1		 With Liquid Glue				 Panel Thickness X(Max.)	A																																																																																							
B							Screw L=5.0 For Panel Thickness Under 1.2mm Screw L=6.0 For Panel Thickness Between 1.2~2.0mm	B																																																																																							
C					 Recommended Panel Cut-Out			C																																																																																							
D								D																																																																																							
E	 LOGO		Material: - Waterproof rate: IP67 - Connector: Black, Nylon + GF - Pin: Copper Alloy, Gold plated - Applicable wire range: 22AWG - 26AWG Ⓢ Important Dimension - Max torque on hex stand off: 9.92lb - Operating temperature: -40°C ~ +105°C		Electrical: - Current rating: 5.0A - Insulation resistance: >500MΩ min. - Dielectric voltage: 500V AC/1 min.			E																																																																																							
F								F																																																																																							
G	Unit: mm 		<table><tr><td>Scale</td><td>Free</td><td></td><td></td><td></td><td></td><td>Date</td><td>Name</td></tr><tr><td colspan="8">TOLERANCE</td></tr><tr><td>X.X</td><td>±0.25</td><td></td><td></td><td></td><td></td><td>Drawn</td><td>28.11.11 Chappell</td></tr><tr><td>X.XX</td><td>±0.10</td><td></td><td></td><td></td><td></td><td>Approved</td><td></td></tr><tr><td>X.XXX</td><td>±0.05</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>DIM</td><td>TOL</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>X.°</td><td>±1°</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>X.X°</td><td>±X°</td><td>①</td><td>Updated</td><td>17.09.13</td><td>Wilson</td><td></td><td></td></tr><tr><td>Angle</td><td>TOL</td><td>Id.</td><td>Modification</td><td>Date</td><td>Name</td><td></td><td></td></tr></table>		Scale	Free					Date	Name	TOLERANCE								X.X	±0.25					Drawn	28.11.11 Chappell	X.XX	±0.10					Approved		X.XXX	±0.05							DIM	TOL							X.°	±1°							X.X°	±X°	①	Updated	17.09.13	Wilson			Angle	TOL	Id.	Modification	Date	Name			<table><tr><td colspan="2">Title</td></tr><tr><td colspan="2">Waterproof DSub connector Straight pin, Female, PCB mount, 15 pin</td></tr><tr><td colspan="2">ASSMANN WSW-No.</td></tr><tr><td colspan="2">A-DF15PP-WP-R</td></tr><tr><td>Drawing-No.</td><td></td></tr><tr><td></td><td>rev01</td></tr><tr><td>Replace</td><td>Sheet</td></tr><tr><td></td><td>1/1</td></tr></table>		Title		Waterproof DSub connector Straight pin, Female, PCB mount, 15 pin		ASSMANN WSW-No.		A-DF15PP-WP-R		Drawing-No.			rev01	Replace	Sheet		1/1	G
Scale	Free					Date	Name																																																																																								
TOLERANCE																																																																																															
X.X	±0.25					Drawn	28.11.11 Chappell																																																																																								
X.XX	±0.10					Approved																																																																																									
X.XXX	±0.05																																																																																														
DIM	TOL																																																																																														
X.°	±1°																																																																																														
X.X°	±X°	①	Updated	17.09.13	Wilson																																																																																										
Angle	TOL	Id.	Modification	Date	Name																																																																																										
Title																																																																																															
Waterproof DSub connector Straight pin, Female, PCB mount, 15 pin																																																																																															
ASSMANN WSW-No.																																																																																															
A-DF15PP-WP-R																																																																																															
Drawing-No.																																																																																															
	rev01																																																																																														
Replace	Sheet																																																																																														
	1/1																																																																																														
H								H																																																																																							
	1	2	3	4	5	6	7																																																																																								