
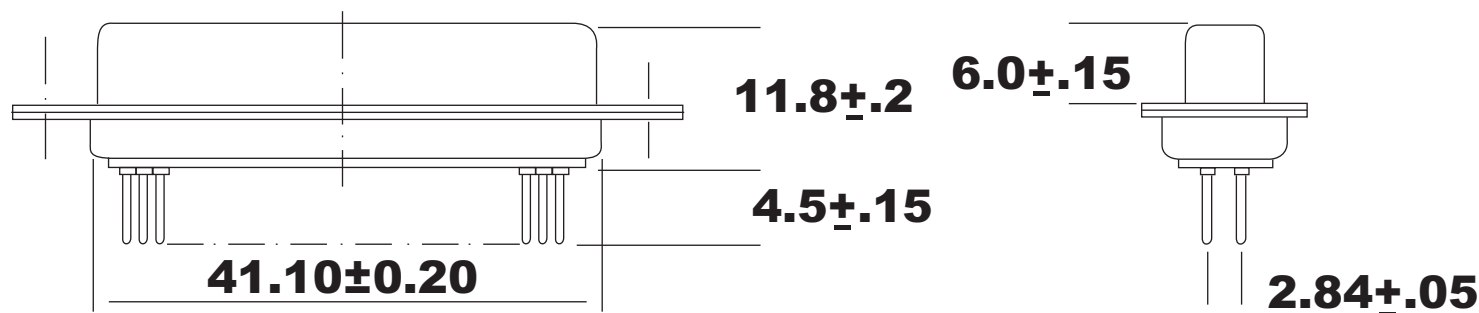


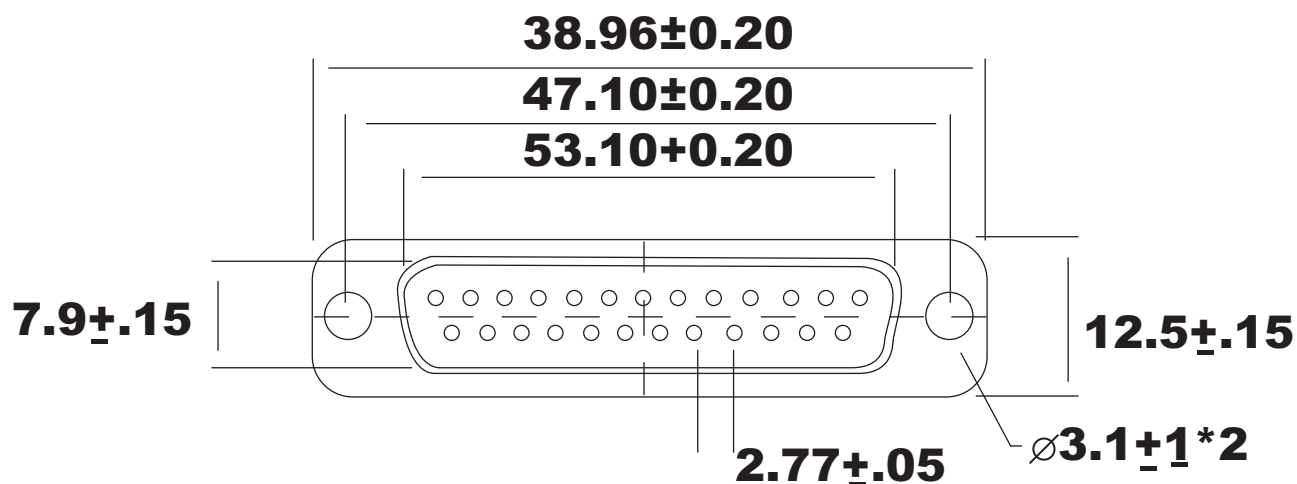

Material:

- Shell: Tin Plated Steel
- Insulator: PBT Thermo Plastic
 - 30% Glass Filled
 - Self-Extinguishing
 - UL94V-0 rated
- Contact Material:
 - Pin: Brass
 - Socket: Phosphor Bronze

Electrical:

- Current Rating: 5.0 Amps
- Dielectric Strength: 1,000V AC Min.
- Insulation Resistance: 5,000MΩ Min.
- Operating Temperature Range: -55°C~+125°C

⊕ = Assmann logo

RoHS
Compliant

ITEM NO.

A-DS25PP-TL-B-R

TITLE

D-Sub Connector Solder Tail - 25 Pin Male,
Stamped

ASSMANN
Electronics, Inc.

1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283
Toll Free: 1-877-277-6266 • Email: info@usa-assmann.com

THIS DRAWING IS UNPUBLISHED
©Copyright 2010 by Assmann Electronic Components
All International Rights Reserved