











9 Contacts





15 Contacts



25 Contacts

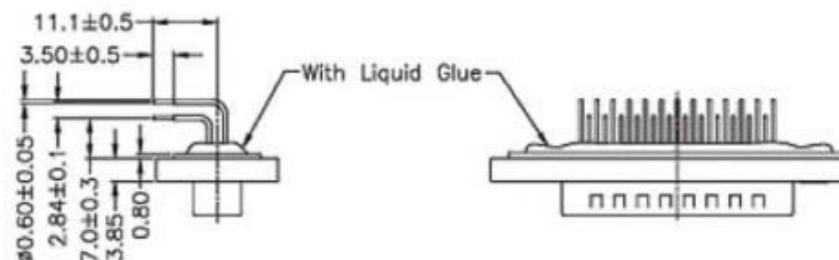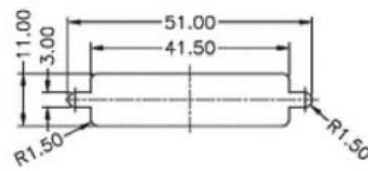

Female

Male

Notes:

- Waterproof Rate: IP67
- Connector: Black, Nylon+GF
- Pin: Copper Alloy, Gold Plated
- Applicable Wire Range: 22AWG - 26AWG
- Insulators: PBT
- Current rating: 5A
- Dielectric voltage: 500V AC / 1 minute
- Insulation resistance: >500MΩ min.
- Operating temperature: -40°C to +105°C

Dimensions

No. of contacts	A	B	C	D
09	39.4	25.00	16.92	16.33
15	47.8	33.50	25.25	24.66
25	64.5	47.04	38.96	38.38

[illegible]

ASSMANN
VVS components

Item No.	Item Description	Unit	Quantity	Rate	Amount
----------	------------------	------	----------	------	--------

A-DFxxAA-WP-R (Female)
A-DSxxAA-WP-R (Male)

Title	Waterproof D-Sub Connector, Angled for PCB Assembly
-------	---

Drawing No.

Replace

rev00

	Sheet
--	-------