
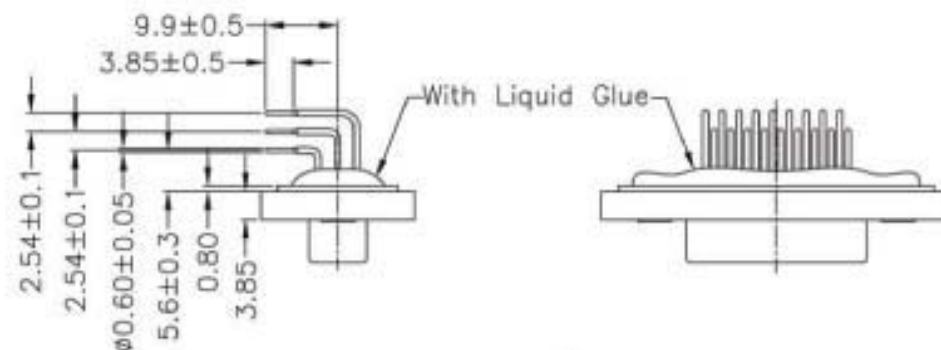


A

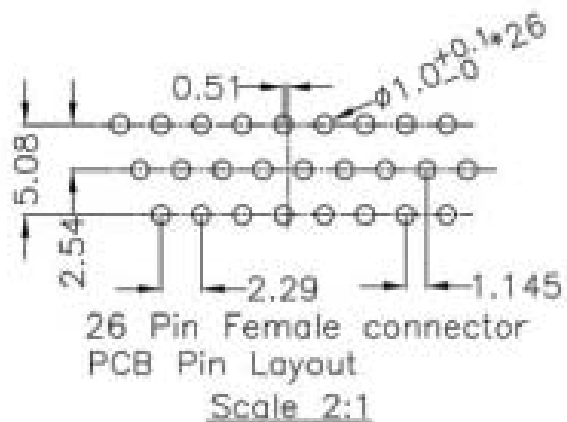



B

A

B

C

C

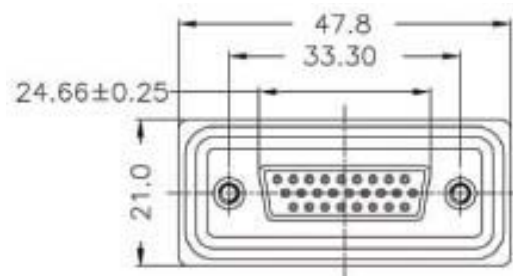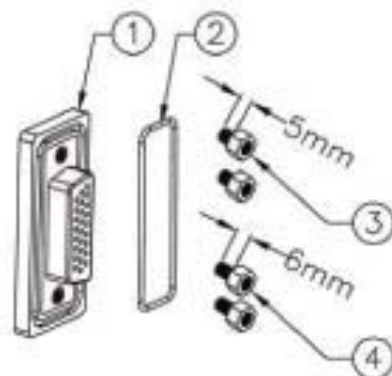


Panel Thickness

X(Max.)

Screw L=5.0 For Panel Thickness
Under 1.2mm

Screw L=6.0 For Panel Thickness
Between 1.2~2.0mm




Recommended Panel Cut-Out

Material:

- Waterproof Rate: IP67
- Connector: Black, Nylon+GF
- Pin: Copper Alloy, Gold Plated

F

F

[illegible]

Item No.	Item Description	Unit	Quantity	Rate	Amount
----------	------------------	------	----------	------	--------

A-HDF26AA-WP-R

Title	D-Sub, High Density, Female, 26 Pin, 90°
--------------	---

Drawing No.	
-------------	--

rev00

Replace

Sheet

H

H