

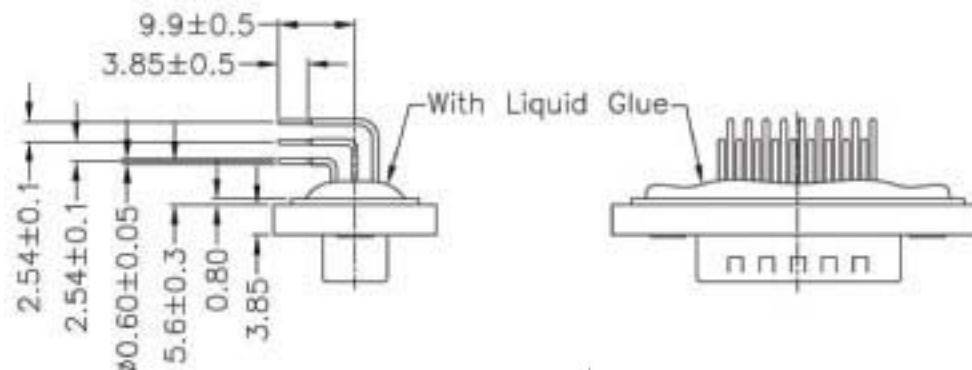
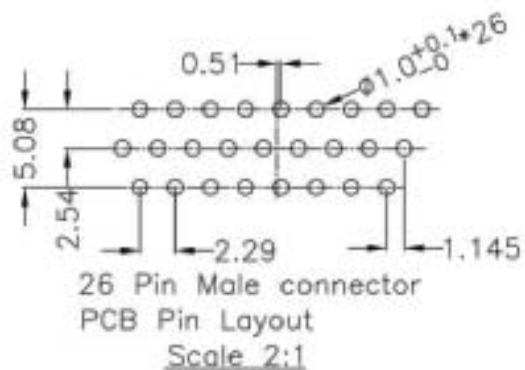


A

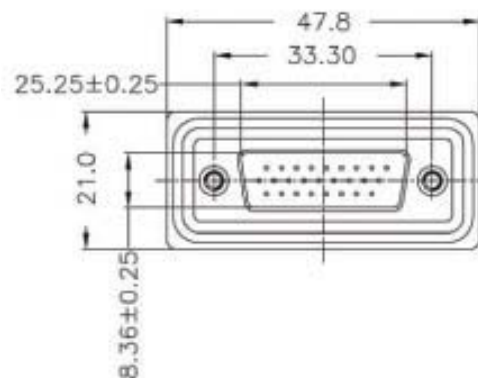

B

C

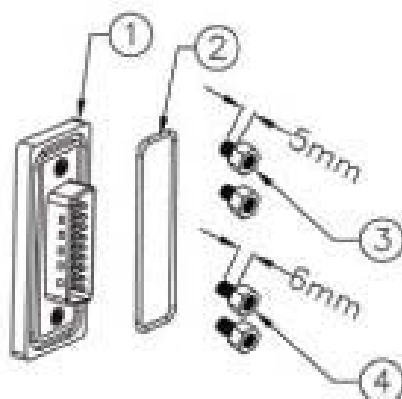

Panel Thickness

X(Max.)

Screw L=5.0 For Panel Thickness Under 1.2mm

Screw L=6.0 For Panel Thickness Between 1.2~2.0mm



Recommended Panel Cut-Out


Material:

- Waterproof Rate: IP67
- Connector: Black, Nylon+GF
- Pin: Copper Alloy, Gold Plated

D

E

F



Scale	1:1							Name
TOLERANCE						Drawn	11.30.11	Chappel
X.X	±0.40					Approved		
X.XX	±0.25							
X.XXX	±0.15							
Angle	±3°					 WISW components		
			Modification	Date	Name			

Item No.	Item Description	Unit	Quantity	Rate	Amount
----------	------------------	------	----------	------	--------

A-HDS26AA-WP-R

Title	D-Sub, High Density, Male, 26 Pin, 90°
--------------	---

Drawing No.

rev00

Replace

Sheet

G

H