
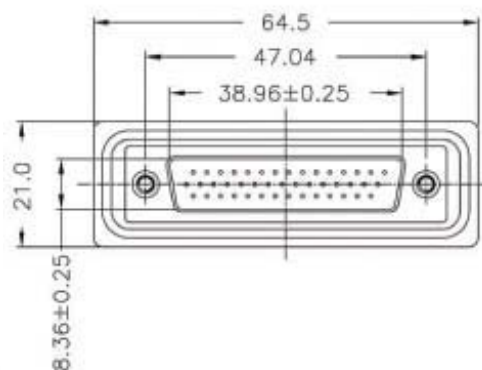


44 Pin Male Connector
PCB Pin Layout

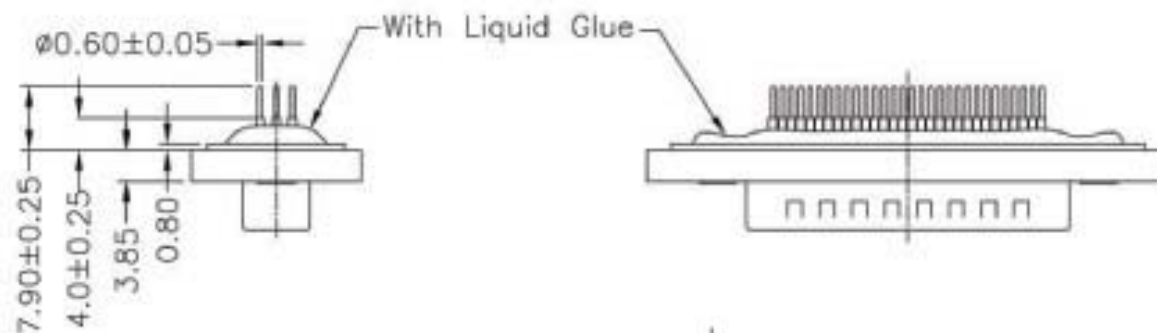

Panel Thickness

Screw L=5.0 For Panel Thickness Under 1.2mm

Screw L=6.0 For Panel Thickness Between 1.2~2.0mm

X(Max.)

11.00

3.00



51.00

41.50

R1.50

R1.50

Recommended Panel Cut-Out

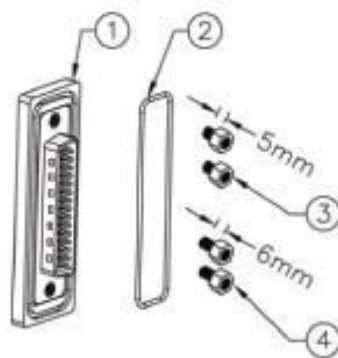

Material:

- Waterproof Rate: IP67
- Connector: Black, Nylon+GF
- Pin: Copper Alloy, Gold Plated

[illegible]

Item No.	Item Description	Unit	Quantity	Rate	Amount
----------	------------------	------	----------	------	--------

A-HDS44PP-WP-R

Title	D-Sub, High Density, Male, 44 Pin, 180°
--------------	--

Drawing No.

rev00

Replace

Sheet
