

A



E



Unit: mm

A

B

C

D

E

F

G

H

1

2

3





4

5

6

7

Female

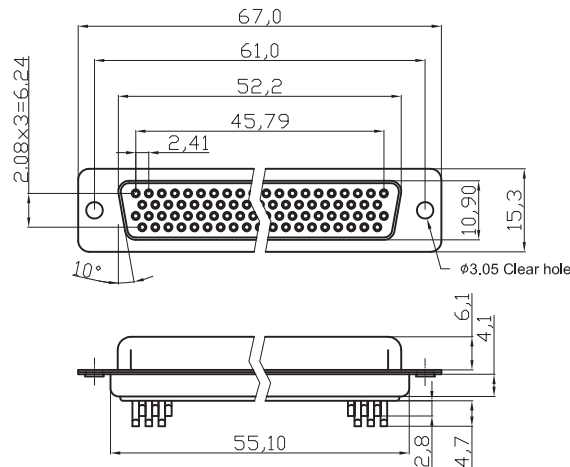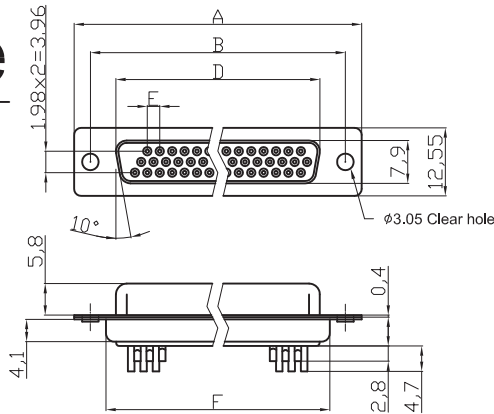

78 Positions

NOTES:

MATERIAL

Insulator Material:Glass-filled thermoplastic PBT,UL94V-0 rated,Black
Contact Material:Copper alloy, Gold flash selective gold plating
Shell :Steel, 100 µ" Tin Over 50µ" min Copper

Electrical

Contact Resistance :20 milliohms Max at 1 AMP DC.
Insulation Resistance :1000magohms at 500 VDC
Dielectric Withstanding Voltage1000 VAC/rms 60Hz for 1 minute
Current Rating :3 AMP
Volatge Rating :250 VAC/rms 60Hz
Operating Temperature: -20°C+85°C

Dimensions

Positions	A	B	D	E	F
15	30.81	24.99	16.33	2.29	19.20
26	39.20	33.30	24.70	2.29	27.70
44	53.05	47.04	38.40	2.29	41.10
62	69.40	63.50	54.80	2.41	57.30



File No.: E198287

Unit: mm



Scale	Free					Date	Name	Title
TOLERANCE						Drawn	17.11.11	Chappell
X.	±0.38					Approved	14.02.13	Groll
X.X	±0.25							
X.XX	±0.13							
DIM	TOL							
X.°	±3°							
X.X°	±1.0°	①	Tooling modified	14.02.13	Wilson			
Angle	TOL	Id.	Modification	Date	Name			



1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283
Toll Free: 1-877-277-6266 • Email: info@assmann.us

High Density DSub Connector Solder Cup, non-threaded insert	
ASSMANN WSW-No. A-HDxxxLL-TL-B-R	
Drawing-No. ASS 4895 CO	rev01
Replace	Sheet 2/2