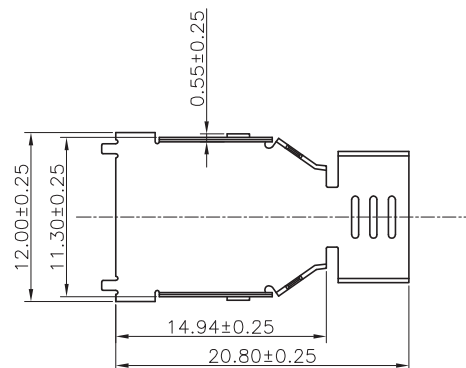
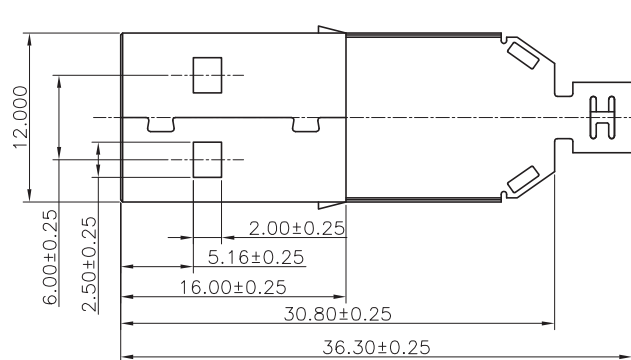


Scale	1:1							Name
TOLERANCE						Drawn	10.19.11	Chappel
X.X	±0.40					Approved		
X.XX	±0.25							
X.XXX	±0.15							
Angle	±3°							
			Modification	Date	Name			

Item No.	
A-USBPA-3-R	
Title USB Assembly Type 3.0, 9 Pin A/M, 15μ", Solder Type	
Drawing No.	rev00
Replace	Sheet

Material:

- Housing: PBT+30% G.F. UL 94v-0
- Contact 5P: Phosphor Bronze
- Contact 4P: Brass
- Shell: SPCC
- Plating Contact: Gold Flash & Tin over Nickel Plated

Electrical:

- Current Rating: 1.0A @ 30V AC Min.
- Withstanding Voltage: 500V AC for 1 Min.
- Insulation Resistance: 1,000MΩ Min.
- Contact Resistance: 30MΩ Max.
- Mating Force: 3.57KgF Max.
- Unmating Force: 1.02KgF Min.