

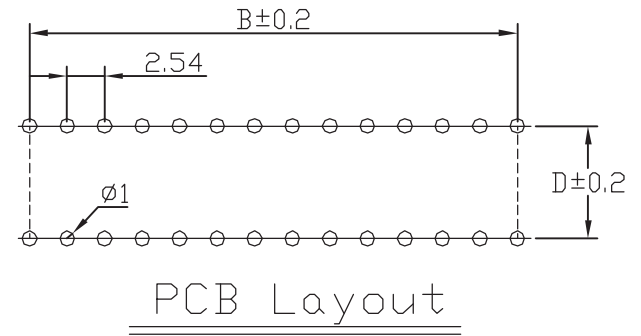
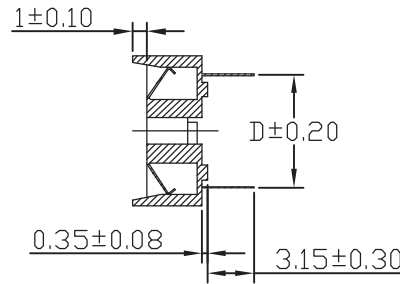


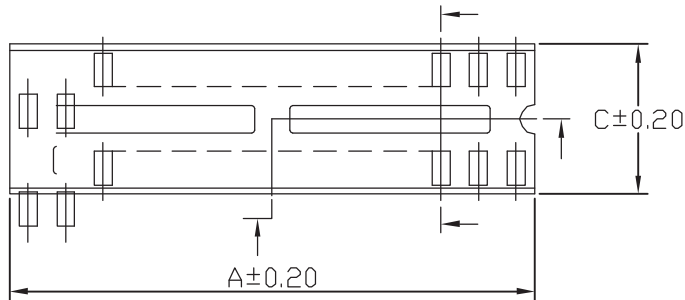

Dimensions

Positions	A	B	C	D
06	7.62	5.08	10.16	7.62
08	10.16	7.62	10.16	
14	17.78	15.24	10.16	
16	20.32	17.78	10.16	
18	22.86	20.32	10.16	
20	25.40	22.86	10.16	
22	27.94	25.40	10.16	

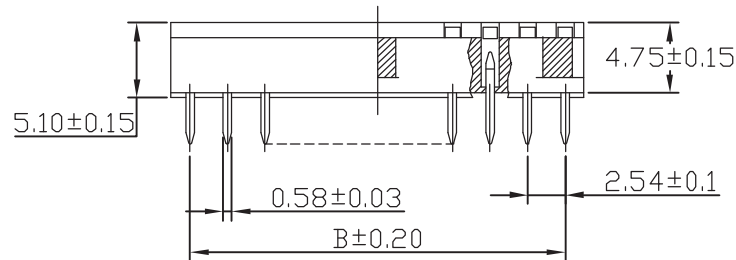

Material:

- Contact: Phosphor bronze thickness 0.15mm
- Contact plating: Tin plated 60μ"~80μ"
- Insulator: PBT-4830, UL 94V-0





Specifications:

- Current rating: 1A
- Dielectric withstanding voltage: 1,000V RMS/minute
- Insulator resistance: 5,000MΩ min.
- Contact resistance: 20mΩ initial 30mΩ after test
- Operating temperatures: -55°C to 85°C
- Insertion force: 340g(12 oz) max. per contact
- Withdrawal force: 80g(2.82 oz) min. per contact

Unit: mm



Scale	2:1					Date	Name	Title IC Socket Low Cost Stamped contacts, 2.54mm pitch	
TOLERANCE					Drawn	07.02.13	Wilson		
X.	±0.38				Approved	07.02.13	Groll	ASSMANN WSW-No.	
X.X	±0.25							Axx-LC-TT-R	
X.XX	±0.13							Drawing-No.	
DIM	TOL							rev01	
X.°	±3°							Sheet	
X.X°	±1.0°	①	Updated all information	07.02.13	Wilson	Replace			1/2
Angle	TOL	Id.	Modification	Date	Name	1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283 Toll Free: 1-877-277-6266 • Email: info@assmann.us			

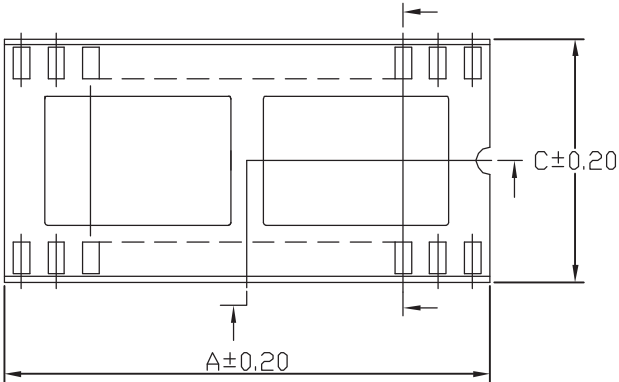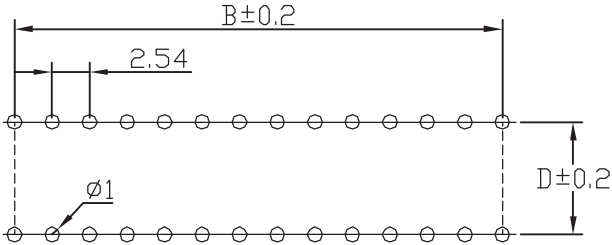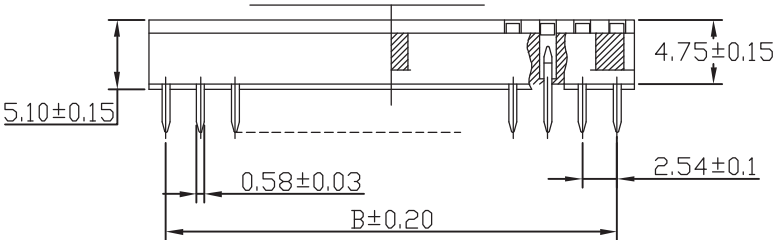	1	2	3	4	5	6	7																																																																									
A					 <u>PCB Layout</u>			A																																																																								
B								B																																																																								
C								C																																																																								
D	Dimensions <table border="1"> <thead> <tr> <th>Positions</th> <th>A</th> <th>B</th> <th>C</th> <th>D</th> </tr> </thead> <tbody> <tr> <td>24</td> <td>30.48</td> <td>27.94</td> <td>17.78</td> <td rowspan="4">15.24</td> </tr> <tr> <td>28</td> <td>35.56</td> <td>33.02</td> <td>17.78</td> </tr> <tr> <td>32</td> <td>40.64</td> <td>38.10</td> <td>17.78</td> </tr> <tr> <td>40</td> <td>50.80</td> <td>48.26</td> <td>17.78</td> </tr> </tbody> </table>			Positions	A	B	C	D	24	30.48	27.94	17.78	15.24	28	35.56	33.02	17.78	32	40.64	38.10	17.78	40	50.80	48.26	17.78					D																																																		
Positions	A	B	C	D																																																																												
24	30.48	27.94	17.78	15.24																																																																												
28	35.56	33.02	17.78																																																																													
32	40.64	38.10	17.78																																																																													
40	50.80	48.26	17.78																																																																													
E								E																																																																								
F								F																																																																								
G	Unit: mm RoHS Compliant			<table border="1"> <tr> <td>Scale</td> <td>2:1</td> <td></td> <td></td> <td></td> <td></td> <td>Date</td> <td>Name</td> <td rowspan="2">Title IC Socket Low Cost Stamped contacts, 2.54mm pitch</td> </tr> <tr> <td colspan="2">TOLERANCE</td> <td></td> <td></td> <td></td> <td>Drawn</td> <td>07.02.13</td> <td>Wilson</td> </tr> <tr> <td>X.</td> <td>±0.38</td> <td></td> <td></td> <td></td> <td rowspan="2">Approved</td> <td rowspan="2">07.02.13</td> <td rowspan="2">Groll</td> <td>ASSMANN WSW-No.</td> </tr> <tr> <td>X.X</td> <td>±0.25</td> <td></td> <td></td> <td></td> <td>Axx-LC-TT-R</td> </tr> <tr> <td>X.XX</td> <td>±0.13</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>Drawing-No.</td> </tr> <tr> <td>DIM</td> <td>TOL</td> <td></td> <td></td> <td></td> <td colspan="3" rowspan="3"> ASSMANN WSW components 1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283 Toll Free: 1-877-277-6266 • Email: info@assmann.us </td> <td>rev01</td> </tr> <tr> <td>X.°</td> <td>±3°</td> <td>①</td> <td>Updated all information</td> <td>07.02.13</td> <td>Wilson</td> <td rowspan="2">Replace</td> <td rowspan="2">Sheet 1/2</td> </tr> <tr> <td>X.X°</td> <td>±1.0°</td> <td>Id.</td> <td>Modification</td> <td>Date</td> <td>Name</td> </tr> <tr> <td>Angle</td> <td>TOL</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </table>			Scale	2:1					Date	Name	Title IC Socket Low Cost Stamped contacts, 2.54mm pitch	TOLERANCE					Drawn	07.02.13	Wilson	X.	±0.38				Approved	07.02.13	Groll	ASSMANN WSW-No.	X.X	±0.25				Axx-LC-TT-R	X.XX	±0.13							Drawing-No.	DIM	TOL				ASSMANN WSW components 1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283 Toll Free: 1-877-277-6266 • Email: info@assmann.us			rev01	X.°	±3°	①	Updated all information	07.02.13	Wilson	Replace	Sheet 1/2	X.X°	±1.0°	Id.	Modification	Date	Name	Angle	TOL								G
Scale	2:1					Date	Name	Title IC Socket Low Cost Stamped contacts, 2.54mm pitch																																																																								
TOLERANCE					Drawn	07.02.13	Wilson																																																																									
X.	±0.38				Approved	07.02.13	Groll	ASSMANN WSW-No.																																																																								
X.X	±0.25							Axx-LC-TT-R																																																																								
X.XX	±0.13							Drawing-No.																																																																								
DIM	TOL				ASSMANN WSW components 1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283 Toll Free: 1-877-277-6266 • Email: info@assmann.us			rev01																																																																								
X.°	±3°	①	Updated all information	07.02.13				Wilson	Replace	Sheet 1/2																																																																						
X.X°	±1.0°	Id.	Modification	Date				Name																																																																								
Angle	TOL																																																																															
H								H																																																																								
	1	2	3	4	5	6	7																																																																									