

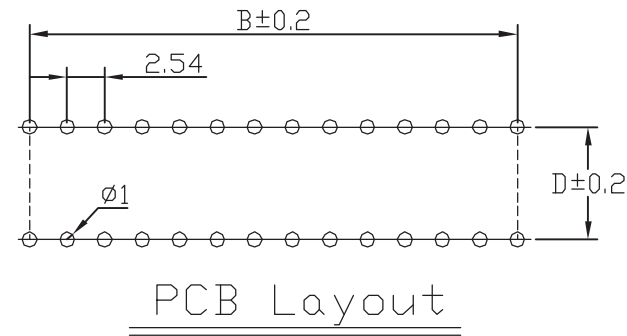
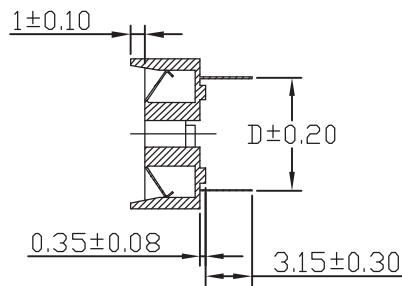


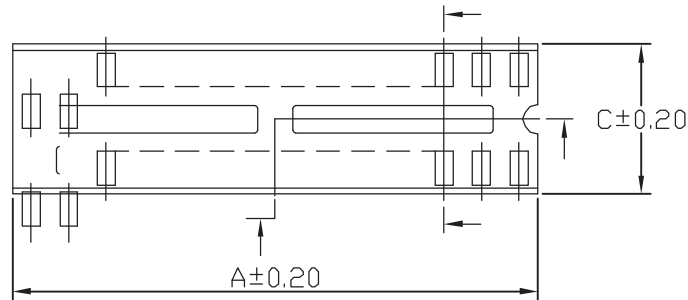

Dimensions				
Positions	A	B	C	D
24	30.48	27.94	10.16	7.62
28	35.56	33.02	10.16	

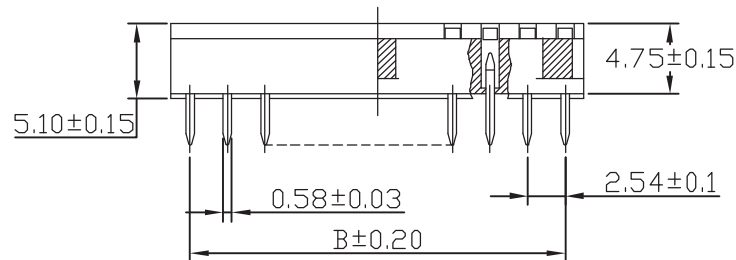

Material:

- Contact: Phosphor bronze thickness 0.15mm
- Contact plating: Tin plated 60μ"~80μ"
- Insulator: PBT-4830, UL 94V-0

Specifications:

- Current rating: 1A
- Dielectric withstanding voltage: 1,000V RMS/minute
- Insulator resistance: 5,000MΩ min.
- Contact resistance: 20mΩ initial 30mΩ after test
- Operating temperatures: -55°C to 85°C
- Insertion force: 340g(12 oz) max. per contact
- Withdrawal force: 80g(2.82 oz) min. per contact

Unit: mm



Scale	2:1						Date	Name
TOLERANCE						Drawn	07.02.13	Wilson
X.	±0.38					Approved	07.02.13	Groll
X.X	±0.25							
X.XX	±0.13							
DIM	TOL					ASSMANN WSW components 1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283 Toll Free: 1-877-277-6266 • Email: info@assmann.us		
X.°	±3°							
X.X°	±1.0°	⑩						
Angle	TOL	Id.	Modification	Date	Name			