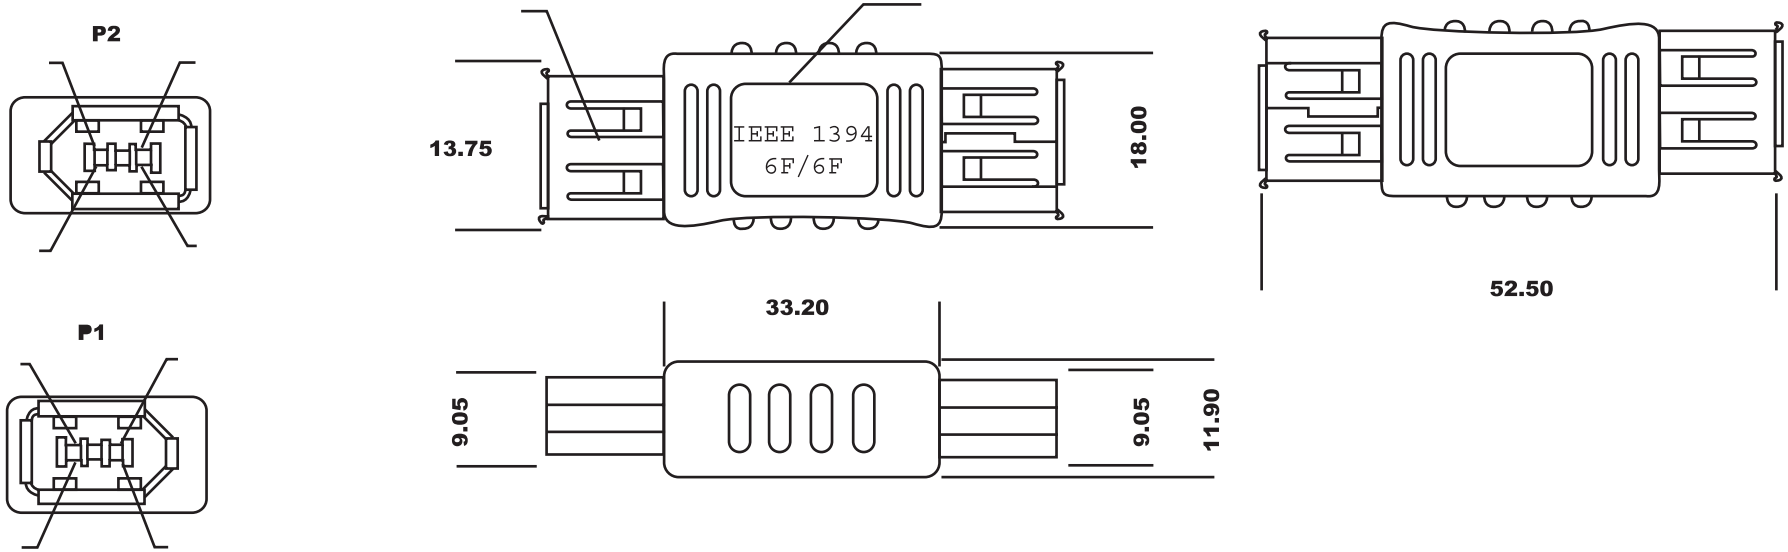


**PIN Assignment**

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| **P1 Female** | **1** | **2** | **3** | **4** | **5** | **6** | **Shell** |
| **P2 Female** | **1** | **2** | **3** | **4** | **5** | **6** | **Shell** |

**Note:**

1.Hook Up Wire: UL 1007 30AWG 7 Strand L:17mm
2.Connector: P1&P2: IEEE1394 USB Female Gold Flash Contact: Nickel Plated Shell Plastic: Black
3.Inner Mold with Copper Foil
4.Core: F18RID 4.1mm * 3.2mm * 7mm
(The wires that were soldered in the PIN 5&PIN 6 of 1394 6P female are through the core)
5.Hood: Molded Type PVC 45P Color:Black(NK-KO1)
6.Electrical Test: <1> 100% Open Short & MIS Wire Test
<2>Contact Resistance 3 Ohms Max
<3>Insulation Resistance 20M Ohms Min
7.Packing: See P-0039 Rev.C Packing Drawing
8.EAN Code: 4016032076179

RoHS Complaint

| | |
|---|---|
| Scale | 1:1 |
| TOLERANCE | |
| X.X | ±0.40 |
| X.XX | ±0.25 |
| X.XXX | ±0.15 |
| Angle | ±3° |

| Modification | Date | Name |
|---|---|---|

| | | Name |
|---|---|---|
| Drawn | 10.24.11 | Chappell |
| Approved | | |

ASSMANN WSW components

**Item No.** **AB-1394-2-R**

**Title** IEEE 1394 Adaptor, 6 Pin Female - 6 Pin Female

Drawing No. **rev00**

Replace | Sheet