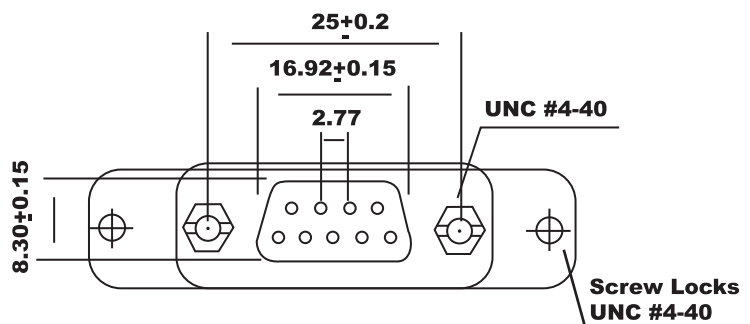


DB9 PIN(M)	DB25PIN (F)
1	8
2	3
3	2
4	20
5	7
6	6
7	4
8	5
9	22
Shell	Shell

Specification:

- 1.Voltage Rating: 300 VAC(rms)
- 2.Current Rating: 3 AMP CONTINUOUS
- 3.Dielectric Strength: 500 VAC
- 4.Contact Resistance: 10m OHM MAX 1 ADC
- 5.Insulation Resistance: 500M OHM min.
- 6.Mating Force Insertion Force: 1 oz-16 oz
Average: 150 gram
Extraction Force: 1 KG min.

Materials:

- 1.Housing: Thermoplastic P.B.T UL 94V-0, Black
- 2.Contact: Phosphor Bronze Gold, Selective Plated Over Nickel
- 3.Shell: Steel Tin Plated
- 4.Packing: See P-0039 Rev.C Packing Drawing + EAN Code
EAN Code: 4016032059943
- 5.Label: Orange Color with White Character



Scale	1:1							Name
TOLERANCE						Drawn	11.22.11	Chappell
X.X	±0.40					Approved		
X.XX	±0.25							
X.XXX	±0.15							
Angle	±3°							
			Modification	Date	Name			

Item No.	AB468-R		
Title	D-Sub RS 232 Adapter, 9 Pin - Male / 25 Pin - Female		
Drawing No.	rev00		
Replace	Sheet		