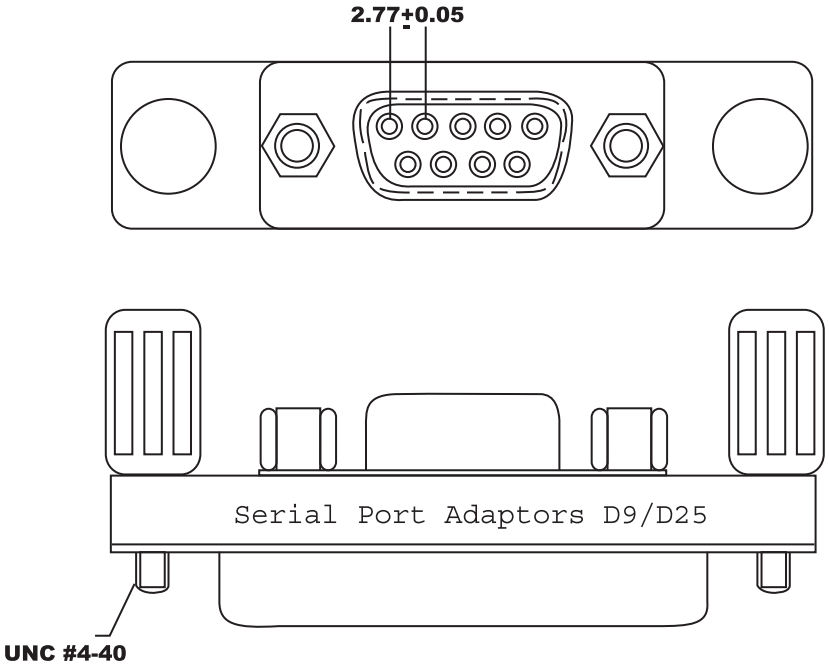

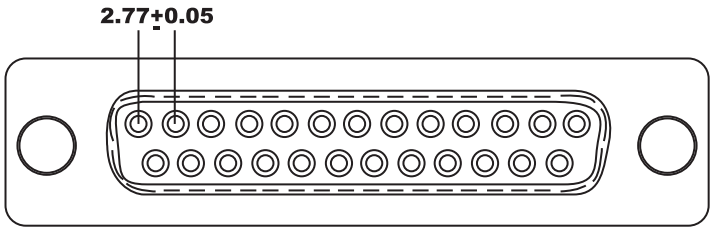

MA 001D (DB9F/25F Adaptor)

PIN Out: 09Female	25Female
1	8
2	3
3	2
4	20
5	7
6	6
7	4
8	5
9	22
G	G

1.Label: Orange Color with White Character
2.One Side: Serial Port Adaptors D9/D25
3.The Other Side: MINI Adapter

Specification:

1.Insulator: PBT glass fiber reinforced UL 94VO
2.Contact: Brass
3.Contact Plating: Gold Plated over Nickel
4.Shell: Tin Plated Shell
5.Current Rating: 3 AMP
6.Dielectric Strength: 500V AC for one minute
7.Insulator Resistance: 500M min at 500 V DC
8.Temperature:-25℃ +105℃

RoHS Complaint

Scale	1:1
TOLERANCE	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	±3°

Modification	Date	Name

		Name
Drawn	11.22.11	Chappell
Approved		

ASSMANN WSW components

Item No. **AB469-R**

Title D-Sub RS 232 Adapter, 9 Pin - Female / 25 Pin - Female

Drawing No. **rev00**

Replace | Sheet