

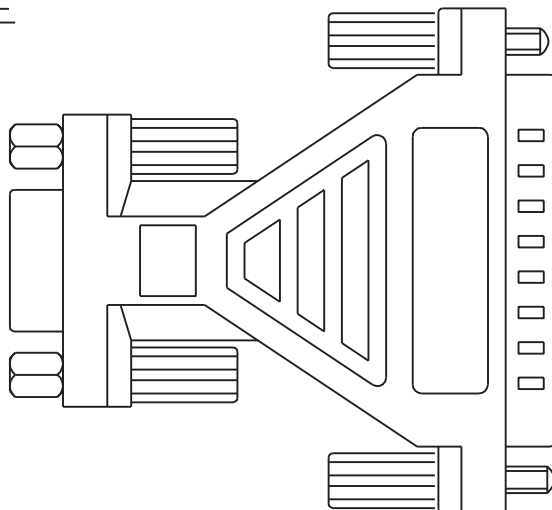


DB25 MALE

DB9 FEMALE



PIN Out

P1

P2

1 ————— 8

$$2 \text{ ————— } 3$$
$$3 \text{ ————— } 2$$

4 _____ 20

$$5 \text{ ————— } 7$$
$$6 \quad \text{---} \quad 6$$
$$7 \text{ ————— } 4$$
$$8 \quad \text{-----} \quad 5$$
$$9 \quad \text{-----} \quad 22$$

Shell _____ Shell

Material:

- Jump Wires: (UL1007) #26 9C+(GROUND)
- Connectors: Both Connectors with Normal Type
- Thumbscrew: #4-40UNC TYPE

DB9 Female Thumbscrew+Nut(#4-40UNC Type)

- Outer Molded with Beige PVC
- Color: Beige
- Molded Type

Scale	1:1							Name
TOLERANCE						Drawn	01.03.12	Chappell
X.X	±0.40					Approved		
X.XX	±0.25							
X.XXX	±0.15							
Angle	±3°							
			Modification	Date	Name			

Item No.	Item Description	Unit	Quantity	Rate	Amount
----------	------------------	------	----------	------	--------

AB914-R

	Title
--	-------

DB9 Female - DB25 Male (MD Type)

Drawing No.

rev00

Replace

Sheet

