
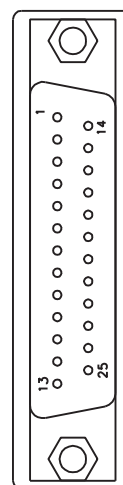
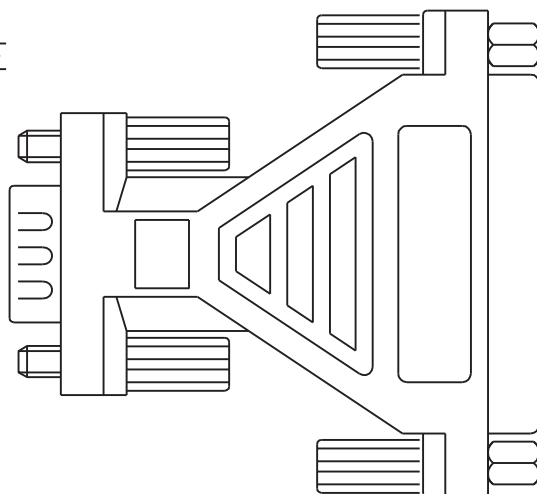


DB25 FEMALE

DB9 MALE



CONFIGURATION:
DB9M

DB25F

1	8
2	3
3	2
4	20
5	7
6	6
7	4
8	5
9	22

8
3
2
20
7
6
4
5
22

SHIELD ————— SHIELD

22
SHIELD

Material:

- Jump Wires: (UL1007) #26 9C+(GROUND)
- Connectors: Both Connectors with Normal Type
- Thumbscrew:#4-4OUNC TYPE
DB9 Female Thumbscrew+Nut(#4-4OUNC Type)
- Outer Molded with Beige PVC
- Color: Beige
- Molded Type

Scale	1:1							Name
TOLERANCE						Drawn	01.03.12	Chappell
X.X	±0.40					Approved		
X.XX	±0.25							
X.XXX	±0.15							
Angle	±3°							
			Modification	Date	Name			

Item No.	Item Description	Unit	Quantity	Rate	Amount
----------	------------------	------	----------	------	--------

AB914F-R

	Title
1	
2	
3	
4	
5	
6	
7	
8	
9	
10	
11	
12	
13	
14	
15	
16	
17	
18	
19	
20	
21	
22	
23	
24	
25	
26	
27	
28	
29	
30	
31	
32	
33	
34	
35	
36	
37	
38	
39	
40	
41	
42	
43	
44	
45	
46	
47	
48	
49	
50	
51	
52	
53	
54	
55	
56	
57	
58	
59	
60	
61	
62	
63	
64	
65	
66	
67	
68	
69	
70	
71	
72	
73	
74	
75	
76	
77	
78	
79	
80	
81	
82	
83	
84	
85	
86	
87	
88	
89	
90	
91	
92	
93	
94	
95	
96	
97	
98	
99	
100	

D-Sub 9-Pin Male to D-Sub 25-pin Female

Drawing No.

rev00

Replace

Sheet

