
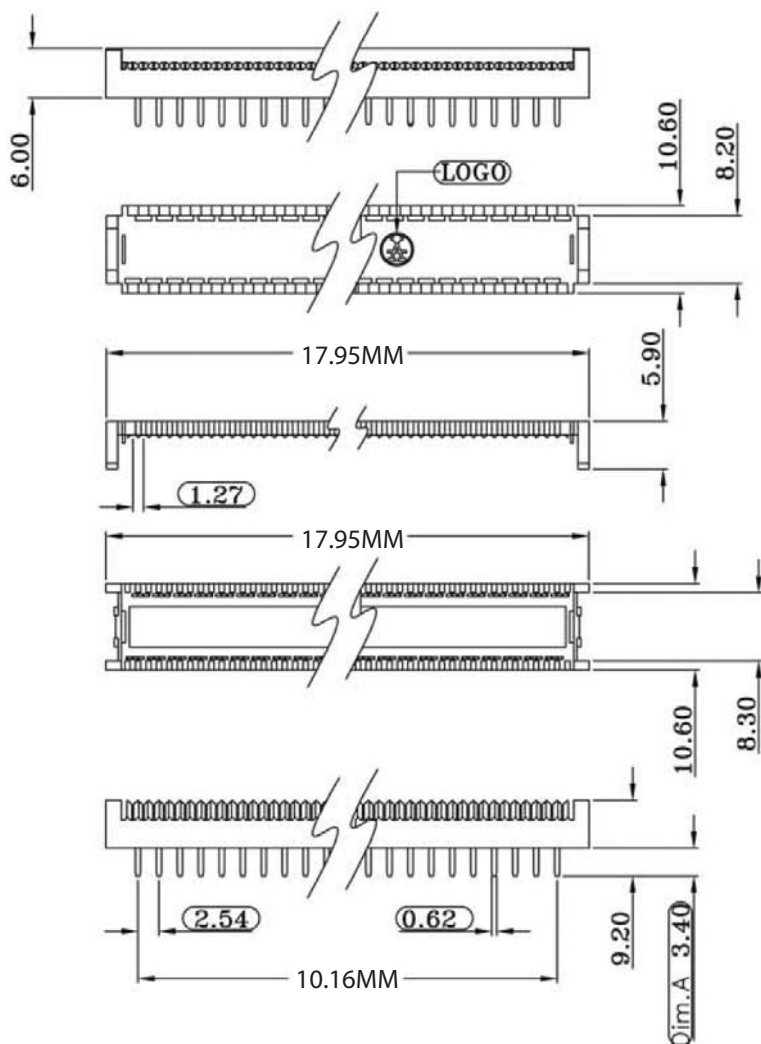


Materials:

- Insulator: P.B.T. 30%Glass Fiber, UL94V-0
- Contacts: Brass, Gold Flash over Nickel
- Contact Plating: Flash Gold Selective,
10μ" or 30μ" of Gold

Electrical:

- Current Rating: 1AMP
- Insulation Resistance: 1,000MΩ Min.
- Dielectric Withstanding: 500V AC
- Operating Temperature: -55°C ~ +105°C



Scale	1:1							Name
TOLERANCE						Drawn	10.28.11	Chappell
X.X	±0.40					Approved		
X.XX	±0.25							
X.XXX	±0.15							
Angle	±3°							
			Modification	Date	Name			

Item No.	Item Description	Unit	Quantity	Rate	Amount
----------	------------------	------	----------	------	--------

ADIP10-G-LC-R

Title	DIP Connector, 2.54 x 7.62MM, 10 Contacts, Gold Plated
--------------	---

Drawing No.	
-------------	--

rev00

Replace

Sheet