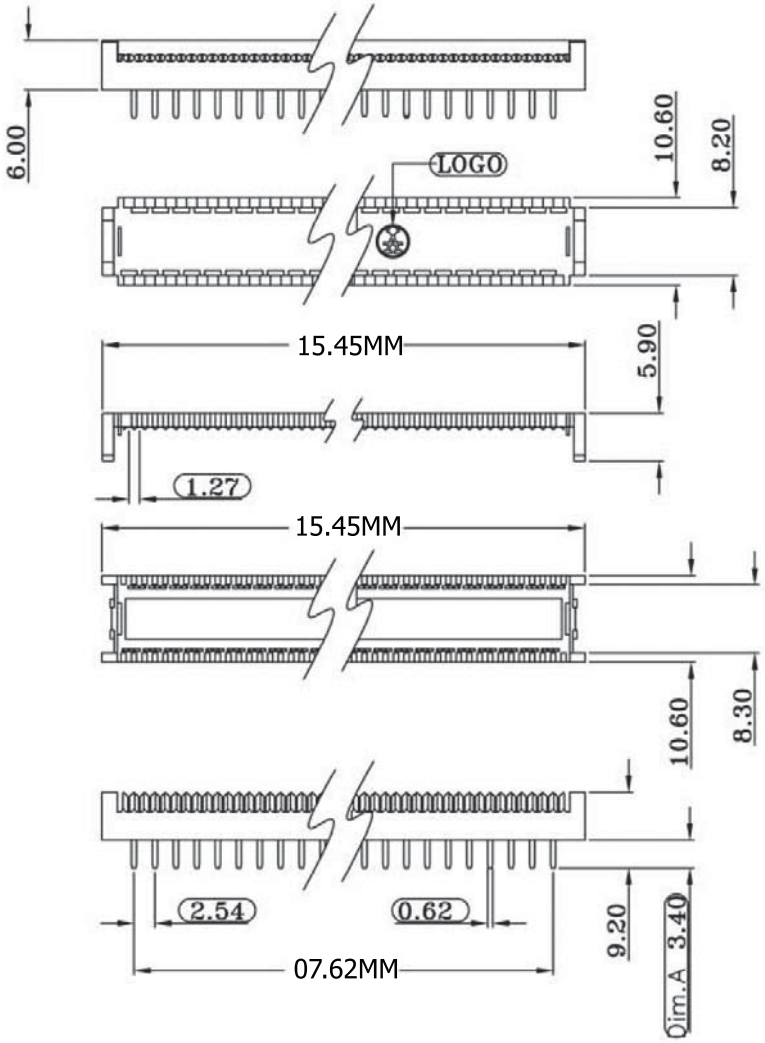

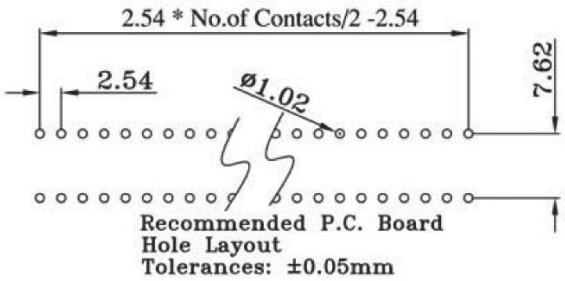







Materials:

- Insulator: P.B.T. 30%Glass Fiber, UL94V-0
- Contacts: Brass, Gold Flash over Nickel
- Contact Plating: Flash Gold Selective, 10μ" or 30μ" of Gold

Electrical:

- Current Rating: 1AMP
- Insulation Resistance: 1,000MΩ Min.
- Dielectric Withstanding: 500V AC
- Operating Temperature: -55°C ~ +105°C

Unit: mm

RoHS Compliant

Scale	1:1
TOLERANCE	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
DIM	TOL
X.°	±3°
X.X°	±X°
Angle	TOL

Id.	Modification	Date	Name

	Date	Name
Drawn	28.10.11	Chappell
Approved		

ASSMANN WSW components
1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283
Toll Free: 1-877-277-6266 • Email: info@assmann.us

Title: DIP connector - 28 contact
2.54 x 15.24mm pitch, Gold flash

ASSMANN WSW-No.: ADIP28-G-LC

Drawing-No.:

rev00

Replace:

Sheet: 1/1