







A



P1



P2



B

C



D

E

F

H

Pin Assignment

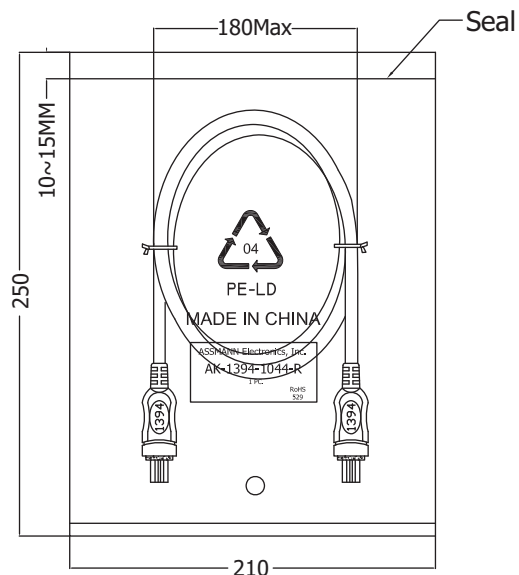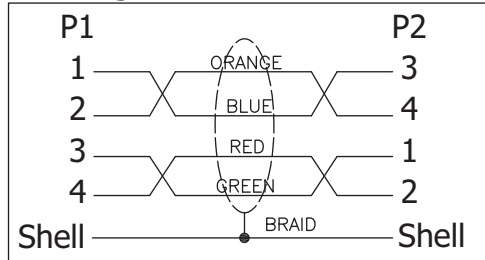

Material:

- Cable: UL20276 [30AWG/1P+AB)*2C+AL/MY+B
- OD ø4.8MM, stranded
- Jacket: Black
- P1 & P2 Connectors: IEEE 1394 4P Male
- G/F Insulation Black
- Shield nickel plated
- Outer jacket: Black 40P PVC
- Tube: Heat shrink, black, OD 1.5*10MM

Electrical:

- Temperature 80°C
- Rated Voltage: 30V
- Construction type A
- IEEE Compliant

Unit: MM

Scale	1:1							Name
TOLERANCE						Drawn	10.24.11	Chappell
X.X	±0.40					Approved		
X.XX	±0.25							
X.XXX	±0.15							
Angle	±3°							
								
			Modification	Date	Name			



Item No.	Item Description	Unit	Quantity	Rate	Amount
----------	------------------	------	----------	------	--------

AK-1394-5044-R

Title	IEEE 1394 Cable - 4 Pin Male <=> 4 Pin Male 5 Meters
--------------	---

Drawing No.

rev00

Replace

Sheet