
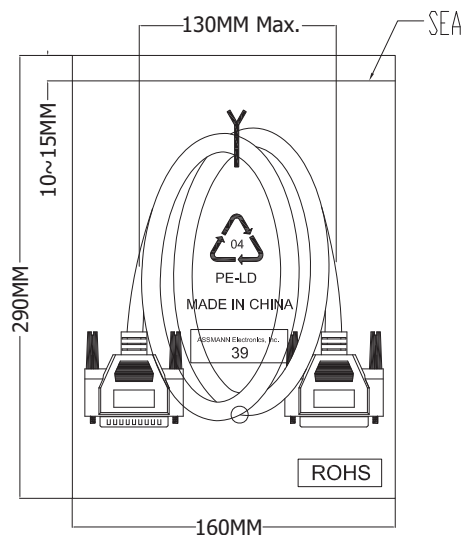


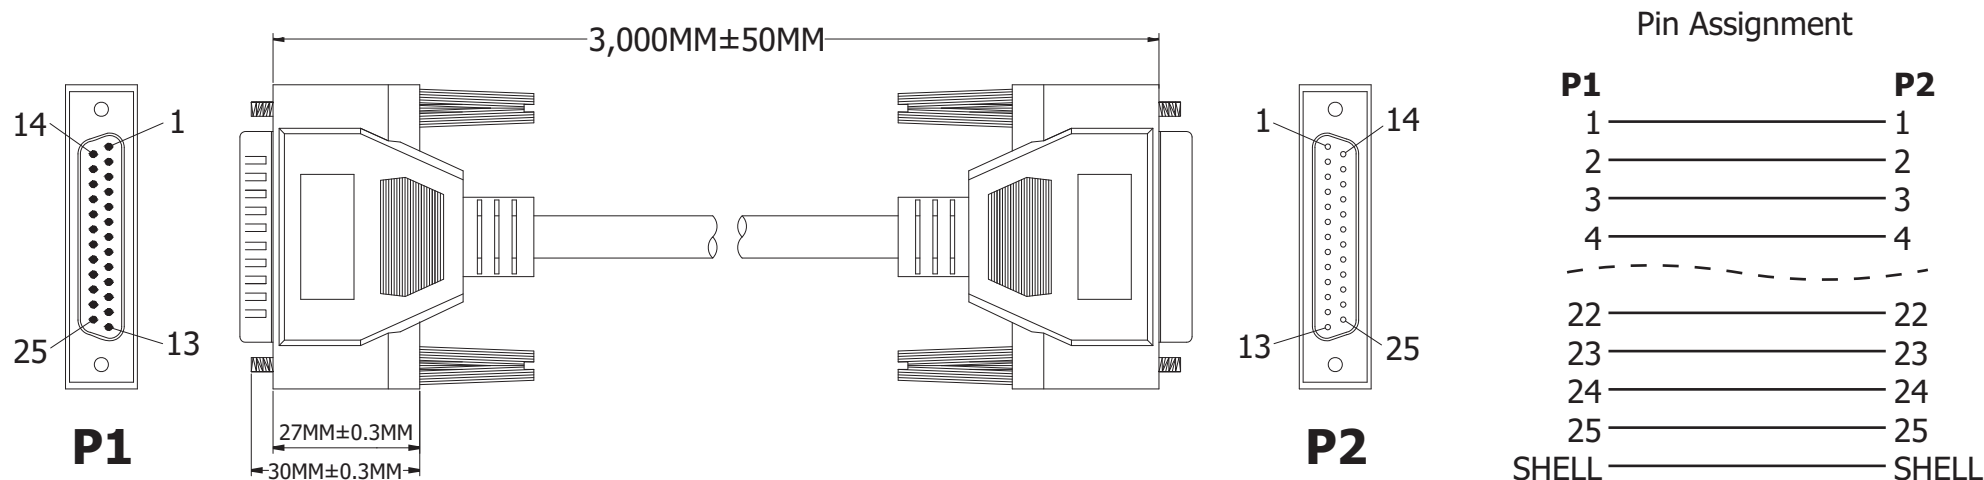

#### Material:

- Cable: NOUL 30#(7/0.10)\*25C+D+AL/MY  
O.D.: 6.5MM
- Connectors-  
P1: DB 25P Male Soder Type Pin G/F Shell NI-Plated (Insulator: Blue)  
P2: DB 25P Female Soder Type Pin G/F Shell NI-Plated (Insulator: Blue)
- Outer Jacket: 40P PVC
- Inner Jacket: Clear LD-PE
- Screw: #4-40UNC Type L=30MM, Nickel Plated
- Color: Beige
- Operating Temperature: 0°C ~ 60°C

#### Electrical:

- 100% short, open, miswire test
- Conduct resistance: 2Ω Max.
- Insulation resistance: 5MΩ Min.
- Dielectric Test: 300V DC

Ⓜ = Assmann logo

**RoHS**  
Compliant

ITEM NO.

**AK166-3-R**

TITLE

Serial/Parallel Extension Cable, 3 Meters,  
D-Sub 25 Pin Male <=> D-Sub 25 Pin Female

**ASSMANN**  
Electronics, Inc.

1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283  
Toll Free: 1-877-277-6266 • Email: info@usa-assmann.com

THIS DRAWING IS UNPUBLISHED  
©Copyright 2009 by Assmann Electronic Components  
All International Rights Reserved